Council™ offers a modern and fashionable approach to floor and wall applications. With a nod to leather, this series is available in three cool tones that were designed to mix and match to create stunning environments.





FLOOR / WALL

RESIDENTIAL


COMMERCIAL

INDOOR

OUTDOOR






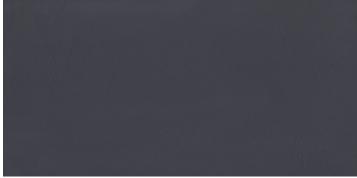

Black Gray

## Mosaics



Bray	Black
•	

Sizes	12"×24"	12"x12" Mesh		6"x12"	1"×		
	11.81"x23.62"	12.28"x12.28"	Floor SBN	Cove Base	Cove Base	Corner Out	
Thickness	8.5mm	7.4mm	9mm	N/A	N,	Ά	
Faces	12 3 Textures	N/A	N/A	N/A	N,	'Α	
Finish	Matte	Matte	Matte	Matte	Ма	tte	
Edge	Rectified	Rectified	d Cut/Rounded Pressec		Pressed		
Grout Joint Recommendation	1/8"	1/8"	1/8"	1/8"	1/8	3"	
Testing	Abrasion Resistance C1027	Breaking Strength C648	Chemical Resistance C650	Water Absorption C373	DCOF ANSI A137.1	Scratch Hardness MOHS	Shade Variation Rating
Results*	IV	>385 lbf	Resistant	<0.50%	>0.60	7	Vı

Product and Installation Details | ANSI A108.02 Section 4.3.8.2 - For running bond/brick joing patterns utilizing tiles (square or rectangular) where the side being offset is greater than 18" (nominal dimension), the running bond offset will be a maximum of 33% unless otherwise specified by the tile manufacturer. If an offset greater than 33% is specified, specifier and owner must approve mock-up and lippage.



