


KNURLS
(.008 DEEP)

NOTES:

1. .040 LINER SHOWN
2. DIAMETERS TO BE TAKEN AS AVERAGE
3. THREAD PROFILE: MODIFIED BUTTRESS
4. REFERENCE QIM-500-A105 FOR NECK FINISH REQUIREMENTS
5. RECOMMENDED 48 HOUR-REMOVAL TORQUE: 8-12 IN. LBS
6. MAT'L: POLYPRO

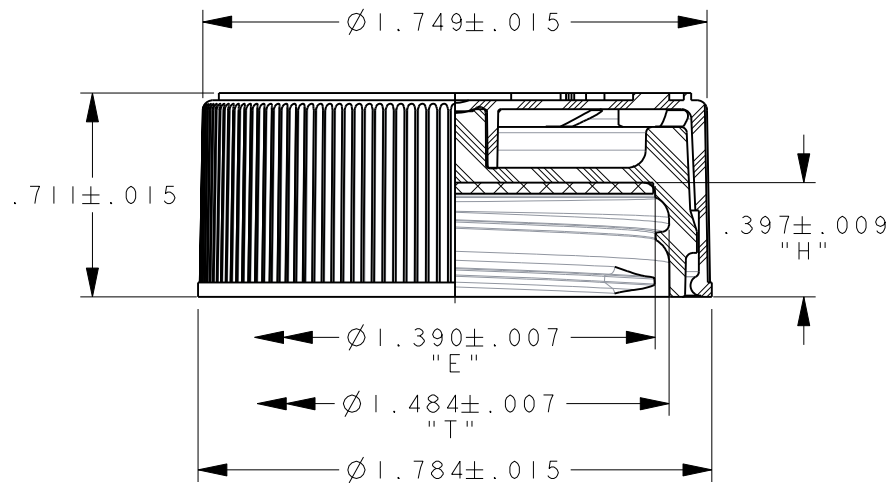

DISCLAIMER

THIS INFORMATION IS PROVIDED AS A GENERAL GUIDE, INCLUDING DIMENSIONS. IT IS THE CUSTOMER'S RESPONSIBILITIES TO SELECT THE PROPER CONTAINER FOR PRODUCT AND APPLICATION COMPATIBILITY.

DISTRIBUTED BY:



REF NO.:

DWG30871

DESCRIPTION:

38-400 PP Plastic Child Resistant Cap, Push Down & Turn, 035 FSM-1 Heat Seal Liner

FoilSeal™ Data Sheet

.035" Pulp FSM-1

Revision: FSM1-06042010

Product	.035" Pulp FSM-1		
Scope	Two piece pulp backed heat induction foil innerseal that will provide a tamper-evident bond to PE containers.		
Composition	Material	Standard	Metric
	Backing	.035"	.889mm
	Wax	-	-
	Foil	.001"	.0254mm
	PET	.0005"	.0127mm
	Heat Seal	.0015"	.0381mm

Composition does not include adhesive, resin or wax bonding layers (if any).

FDA Status:	21 CFR 177.1210	Recommended Storage and Handling:	
Drug Master File (DFM):	#4544	Canadian DMF:	EU / EP Reg.:
GTR Oxygen:	Essentially Zero	MVTR:	Essentially Zero
Print Location (if any):	Foil Layer and/or Heat Seal Layer		

Selig materials are compliant with current USFDA Food allergen Guidelines.
 Selig materials are compliant with California Proposition 65 labeling requirements.
 Selig materials are compliant with limitation of heavy metals in packaging per CONEG & EU 94/62/EC, article 11.

MSDS's are not required as Selig is not a chemical manufacturer or distributor and our products are 'articles' intended for food packaging per 29 CFR 1910.1200 (HazCom).

DISCLAIMER	DISTRIBUTED BY:	REF NO.:
THIS INFORMATION IS PROVIDED AS A GENERAL GUIDE, INCLUDING DIMENSIONS. IT IS THE CUSTOMER'S RESPONSIBILITIES TO SELECT THE PROPER CONTAINER FOR PRODUCT AND APPLICATION COMPATIBILITY.	Pipeline Packaging™	DWG30871
	DESCRIPTION: 38-400 PP Plastic Child Resistant Cap, Push Down & Turn, 035 FSM-1 Heat Seal Liner	