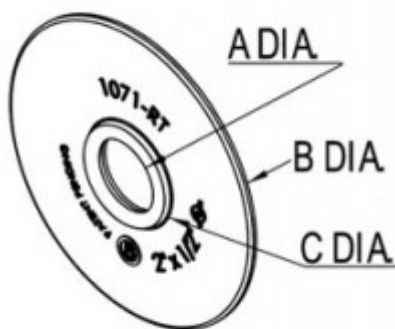


Mighty-Seal® 1-1/4" to 3/4" Raintight Reducing Washers

For maintaining wet locations seal on rated enclosures. Coated Washer installs on outside of 3R rated enclosure. Product contains one coated and one uncoated galvanized steel reducing washer. Uncoated washer should be installed inside to maintain raceway continuity. Center reducing washers in middle of knock-out. Listed for use with Wet Location Connectors, or Threaded Rigid Conduit (and IMC) with standard locknuts. Sunlight Resistant.

Patented. US Patent 9,709,171.


[Download Photo](#)
[Download Drawing](#)
[Download Drawing](#)

Product details

Catalog Number:	1065-RT
UPC Number:	78174714065
Primary Materials:	Galvanized Steel with EPDM Rubber Coating
Trade Size:	1-1/4" - 3/4"
Unit Quantity:	20
Standard Package Quantity:	200

Dimensions

Trade Size:	1-1/4" - 3/4"
Dimensions A:	1.05
Dimensions B:	2.34
Dimensions C:	1.38

Certifications & Codes

Federal Specification Number: A-A-50553

UL File Number: E11259

UNSPSC: 39121321

Nema Standard: FB-1

UL Standard: UL-514B

Country Of Manufacture: USA