




# Staples



**Rolled  
(Diamond) Point**



**Cut (Slash) Point**

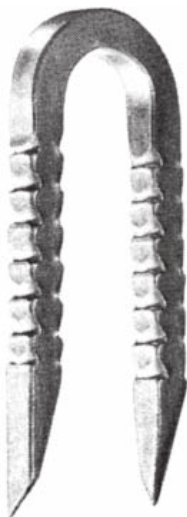

**Square Shank  
Barbed**

## Round Shank

Staples are used to secure ground wire and ground wire molding to wood poles.

Rolled (Diamond) Point			
Catalog Number	Finish	Dimensions L x Inside W x Wire Dia	Weight/ 100 (lbs)
J128	steel hot dip galvanized	3 x 1 1/16 x 1/4	7.9
J142	steel hot dip galvanized	3 x 1 1/2 x 1/4	8.3
J156	steel hot dip galvanized	2 x 1/2 x 0.162	2.5
J172	steel hot dip galvanized	1 1/2 x 3/8 x 0.148	1.5
J173	steel hot dip galvanized	1 3/4 x 3/8 x 0.148	1.6
J7487HDG	steel hot dip galvanized	2 5/8 x 0.162	2.3
J7493HDG	steel hot dip galvanized	3 x 1 1/16 x 1/4	5.7
J6490	coppercoated	2 x 5/8 x 0.162	3.6
J6493	coppercoated	1 1/4 x 1/4 x 0.114	0.6
J6494	coppercoated	1 1/2 x 5/16 x 0.144	1.2
J6495	coppercoated	1 3/4 x 3/8 x 0.144	1.5
J6496	coppercoated	2 x 1/2 x 0.162	2.2
J6521	coppercoated	2 x 1 1/16 x 3/16	3.1
J6522	coppercoated	3 x 1 x 1/4	7.9
J7487	electro-galvanized	2 x 5/8 x 0.162	2.3
J7488	electro-galvanized	2 x 5/8 x 3/16	3.2
J7488HDG	steel hot dip galvanized	2 x 5/8 x 3/16	3.3
J7491	electro-galvanized	2 1/2 x 29/32 x 3/16	3.7
J7493	electro-galvanized	3 x 1 1/16 x 1/4	7.5

Cut (Slash) Point			
Catalog Number	Finish	Dimensions L x Inside W x Wire Dia	Weight/ 100 (lbs)
J157	steel hot dip galvanized	2 x 1/2 x 0.162	2.4
J1672G	steel hot dip galvanized	1 1/2 X 1/4 X 0.148	1.4
J1672	mill galvanized	1 1/2 X 1/4 X 0.148	1.4
J1673	mill galvanized	1 3/4 X 1/4 X 0.148	2.0
J6652	coppercoated	1 1/2 x 3/8 x 0.148	1.8
J6653	coppercoated	2 X 1/4 x 0.162	2.2
J6655	coppercoated	2 x 1/2 x 0.162	2.3

## Square Shank Barbed

### Features

- Stronger/ resists bending better than traditional round wire staples
- Barbed shank provides increased retention in wood fibers

Catalog Number	Finish	Dimensions L x Inside W x Wire Dia	Weight/ 100 (lbs)
J7656	steel hot dip galvanized	1 1/2 x 3/8 x 0.131	140
J7657	steel hot dip galvanized	2 x 3/8 x 0.131	190
J7663	steel hot dip galvanized	2 1/4 x 1 3/16 x 0.218	7.0
J7664	steel hot dip galvanized	3 x 1 1/16 x 0.218	830
J7672	steel hot dip galvanized	2 x 5/8 x 0.165	320
J7682	coppercoated	1 1/2 x 3/8 x 0.140	170