



**Brella™**

Two-piece elongated 1.28 gpf chair height toilet  
**402095**

### Features

- Two-piece design
- Elongated bowl offers added room and comfort
- Skirted trapway simplifies cleaning
- 1.28 gpf (4.8 lpf)
- Left-hand Polished Chrome trip lever
- 2" (51 mm) glazed trapway
- Combination consists of toilet bowl and tank
- Uses the force of gravity and a precision-engineered tank, bowl, and trapway to deliver virtually plug-free performance
- Patented ReadyLock® installation system, a simple solution for skirted toilets, saves time, hassle, and eliminates the need to drill into the floor for standard 12" (305 mm) rough-in
- Standard 12" (305 mm) rough-in only. Cannot be combined with K-5383, or K-5381 for use in 10" or 14" installations

### Installation

- Standard 12" (305 mm) rough-in
- Seat and supply line sold separately

### Recommended Products/Accessories

- K-7637 Angle Supply with Stop (single)
- K-23726 Drain treatment
- K-26801 Impro® ReadyLatch® Quiet-Close™ elongated toilet seat

### Included Components

- 402098 Toilet tank
- 402101 Elongated toilet bowl



**ADA** **CSA B651** **OBC**

### Codes/Standards

ASME A112.19.2/CSA B45.1  
DOE - Energy Policy Act 1992  
EPA WaterSense®  
California Energy Commission (CEC)  
ADA  
ICC/ANSI A117.1  
CSA B651  
OBC

### STERLING® Toilet Limited Warranty


See website for detailed warranty information.

1-800-STERLING (1-800-783-7546)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current Specification Sheet, go to [www.sterlingplumbing.com](http://www.sterlingplumbing.com).

10-16-2025 21:23 - US/CA

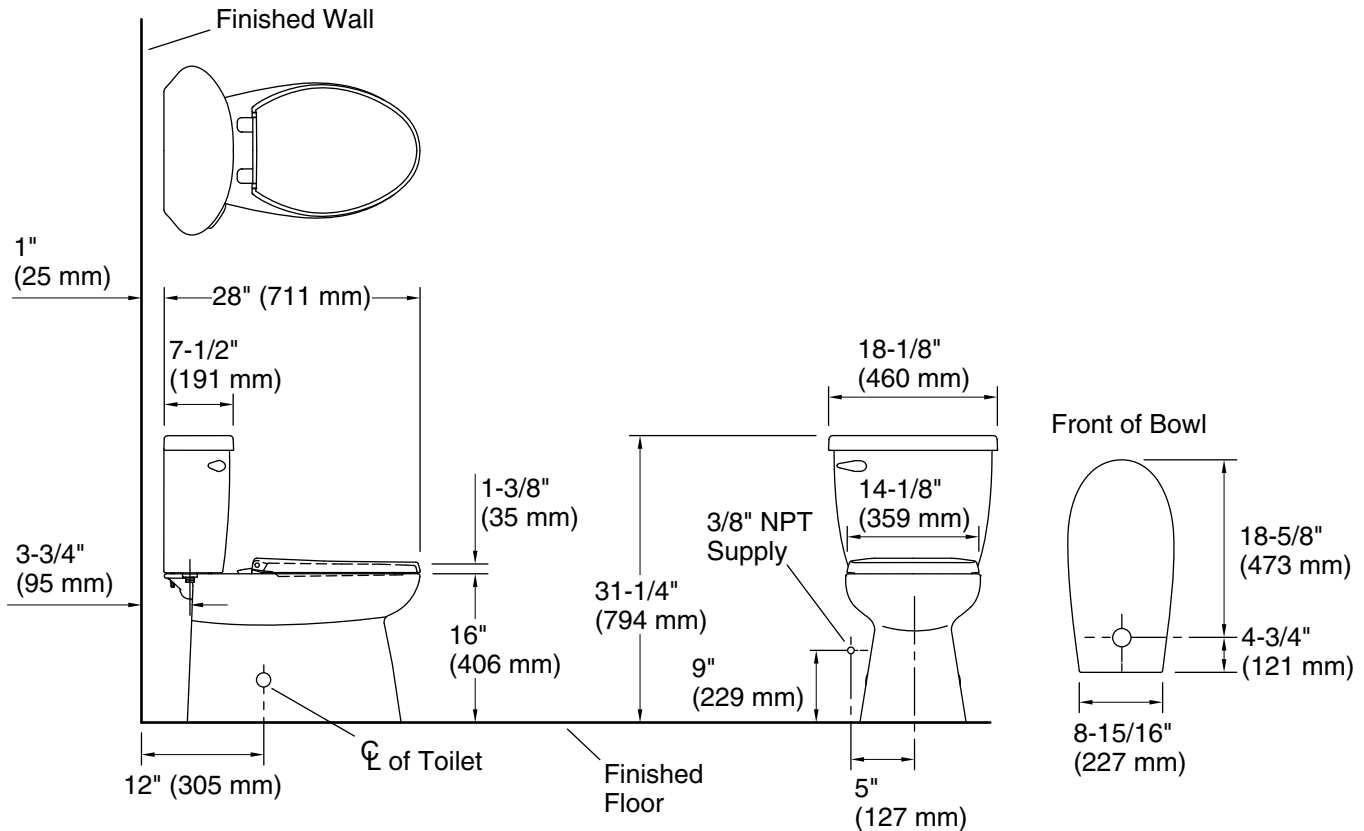

### Technical Information

All product dimensions are nominal.

Toilet type:	Floor-mount
Waste Outlet:	Floor
Bowl shape:	Elongated
Trap passageway:	2" (51 mm)
Water surface size:	5-1/16" x 4-9/16" (129 mm x 115 mm)
Rim to water surface:	8-9/16" (217 mm)
Rough-in:	12" (305 mm)
Seat-mounting holes:	5-1/2" (140 mm)

### Fixture Supply Requirements

Min static pressure:	15 psi (103.4 kPa)
Max static pressure:	80 psi (551.6 kPa)

### Notes

Install this product according to the installation instructions.

Product dimensions are nominal and may vary per ASME A112.19.2 tolerances.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.

Plumbing codes may require elongated toilets and elongated, open-front seats in public bathrooms.

Accessibility standards may require controls to be located on the open side of the toilet.