

UniCam® Connector, LC Single-mode (OS2)

CORNING

Part Number:
95-200-99

Corning UniCam® LC connectors offer optical performance in a fast, easy field-termination solution ideal for fiber-to-the-workstation applications where setup and teardown time is critical. The high-precision mechanical splice technology enables fiber optic networks to be installed quickly and cost effectively. Installation of an LC, SC or ST® compatible connector can be accomplished in about 50 seconds to one minute with the UniCam High-Performance Tool Kit.

The lightweight, handheld installation tool and high-performance precision cleaver virtually eliminate human variability during installation, ensuring terminations are right the first time, every time. This kit was designed with consideration for network installers, from the cleaver, with its intuitive, hand-held precision design and dual-clamp precision hold, to the installation tool, with its immediate go/no-go feedback signal indicating proper mating of the field fiber to the fiber stub. Installation is as easy as strip, clean, cleave, cam and crimp, with exceptional optical performance assured. Every UniCam connector is assured to meet the published specification at the time of installation or Corning will replace it.

Features and Benefits

Performance guaranteed

100 percent yield guarantee

Broad operating temperature range (-40°C to +75°C)

Utility and flexibility

Factory-polished end face


Consistent optical performance

Fast termination and no consumables

Low installation cost

Minimum insertion loss

Optimum optical performance

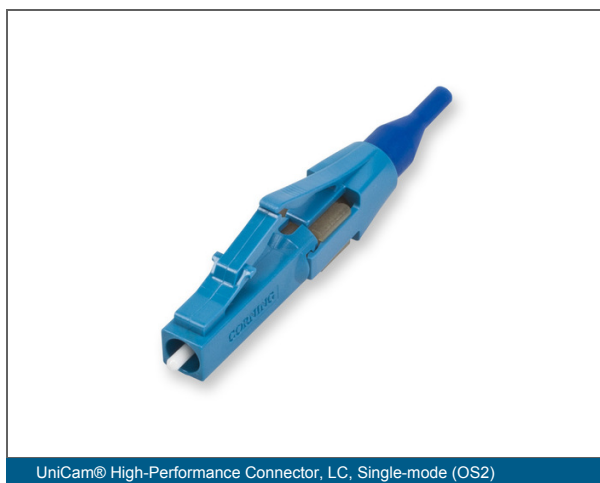

UniCam® Connector, LC Single-mode (OS2)



Specifications

General Specifications

| | |
|------------------|------------------------------|
| Fiber Category | Single-mode (OS2) |
| Product Type | Field-Installable Connectors |
| Corning Logo | Yes |
| Keyed (security) | No |
| Technology | No-Epoxy/No-Polish |

Standards

| | |
|------|-----------------------------------------------------------|
| RoHS | Free of hazardous substances according to RoHS 2011/65/EU |
|------|-----------------------------------------------------------|

Environmental Conditions

| | |
|------------------------------|-------------------------------------|
| Temperature Range, Operation | -40 °C to 75 °C (-40 °F to 167 °F) |
|------------------------------|-------------------------------------|

Design - Connector

| | |
|------------------|---------|
| Connector Type | LC |
| Housing Color | Blue |
| Boot Color | Blue |
| Ferrule Material | Ceramic |
| Pinned | No |

Mechanical Specifications - Connector

| | |
|---------------------------------|-----------------------------------------|
| Nominal Fiber Outer Diameter | 125 µm |
| Tensile Strength Jacketed Cable | 44 N (9.89 lbf) |
| Durability | ≤ 0.2 dB change, 500 rematings, FOTP-21 |
| Tensile Strength 900 µm Cable | 4.9 N (1.1 lb) change ≤ 0.2 dB, FOTP-6 |

UniCam® Connector, LC Single-mode (OS2)

CORNING

Optical Specifications - Connector

| | |
|-------------------------|----------|
| Polish | UPC |
| Insertion Loss, Max. | 0.5 dB |
| Reflectance | < -55 dB |
| Insertion Loss, Typical | 0.2 dB |

Ordering Information

| | |
|--------------------|-------------------------------------------------------------------------------|
| Product Number | 95-200-99 |
| EAN Code | 4042673619437 |
| Packaging | Individual Pack |
| Package Contents | "Connector, Trigger, Crimp Band, Boot (900 µm), Boot (3.0 mm), Boot (2.0 mm)" |
| Units per Delivery | 1/1 |



Corning Optical Communications LLC • 4200 Corning Place • Charlotte, NC • 28216 • United States
800-743-2675 • FAX: 828-325-5060 • International: +1-828-901-5000 • www.corning.com/opcomm

A complete listing of the trademarks of Corning Optical Communications is available at www.corning.com/opcomm/trademarks. All other trademarks are the properties of their respective owners. Corning Optical Communications is ISO 9001 certified. © 2023 Corning Optical Communications. All rights reserved.