

# DLE3

## Edge Lit Recessed LED Downlight

### Product Description

The DLE Edge Lit LED Downlight Series offers an attractive visual aesthetic with a low profile in both round and square apertures. The edge-lit technology uses a reflective light guide panel that disperses light through a diffused lens, making it a practical and economical solution with high performance. The ultra-thin fixture depth and off-board driver allow for more flexible installation and increased lifetime with improved thermal management. The DLE fixture uses a plenum-rated cable connector to link the downlight module to the remote driver box and then pops into place with its adjustable, spring-loaded retention tabs for a secure fit, eliminating the need for a J-box or recessed housing. Adding light in tight spaces such as hallways, bathrooms, basements, entryways, porches, stairways, work areas, utility closets and corridors just got easier.

#### Construction

- Cast aluminum housing routes heat away from electrical components
- Edge-Lit technology allows for extremely thin fixture depth
- Adjustable, spring loaded retention tabs ensure secure fixture retention
- Certified for direct contact with insulation
- Includes gasket to meet AirTight requirements

#### Optical System

- Precision engineered optical stack creates uniform light distribution that maximizes lumen output
- CCT offered at 2700K, 3000K, 4000K, 5000K
- Utilizes high performing LEDs with a greater than 90 CRI and an R9 greater than 50

#### Electrical

- Off-board driver minimizes installation height and maximizes fixture life through improved heat management
- Dimmable to less than 5% with compatible TRIAC dimmers
- Operating temperature of 0° to 120°F (-18°C to 49°C)
- Input voltage of 120VAC
- TM-21 Reported L70(9K) hours >54,000

#### Finish

- White powder coat finish standard
- Color trims available in Black, Nickel and Aged Copper
- Available in round configurations

#### Mounting and Installation

- Spring loaded retention arms allow for easy installation into ceiling up to 3/8" thick with no need for a recessed housing
- Off-board driver/junction box includes two 1/2" KOs and three-port poke-in connectors
- Included paper cutting template
- Metal rough in template available
- Extension power cables (10', 20') available
- Suitable for damp locations

#### Warranty




- 5-year limited system warranty standard
- Warranty does not cover product failure due to an overvoltage event (power surge)
- For installations where power surge may be possible, NICOR recommends installing additional surge protection at the electrical distribution panel

Project

Catalog

Type


Date

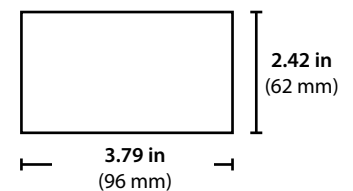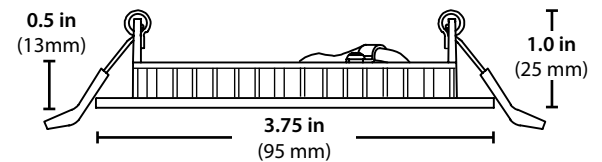

# Photometric Data

## DLE3 2700K RD

|                             |       |
|-----------------------------|-------|
| Input Voltage (VAC)         | 120V  |
| System Level Power (W)      | 6.0   |
| Delivered Lumens (Lm)       | 340   |
| System Efficacy (Lm/W)      | 56.67 |
| Correlated Color Temp (K)   | 2714  |
| Color Rendering Index (CRI) | 90    |
| Beam Angle                  | 110   |
| Spacing Criteria            | 1.24  |



### Intensity Summary (Candle Power)

| Angle | Mean CP |
|-------|---------|
| 0     | 120     |
| 5     | 120     |
| 15    | 115     |
| 25    | 107     |
| 35    | 94      |
| 45    | 79      |
| 55    | 61      |
| 65    | 42      |
| 75    | 23      |
| 85    | 6       |
| 90    | 0       |

### CCT Data Multiplier

|              |       |
|--------------|-------|
| DLE321203KRD | 1.029 |
| DLE321204KRD | 1.056 |
| DLE321205KRD | 1.078 |

### Cone of Light Tabulation

| Mounted height (Feet) | Footcandles Beam Center | Diameter (Feet) |
|-----------------------|-------------------------|-----------------|
| 2                     | 30.1                    | 11.4            |
| 4                     | 7.5                     | 17.1            |
| 6                     | 3.3                     | 22.8            |
| 8                     | 1.9                     | 28.5            |
| 10                    | 1.2                     | 34.3            |
| 12                    | 0.8                     | 40.0            |
| 14                    | 0.6                     | 45.7            |

### Zonal Lumen Summary

| Zone   | Lumens | % of Luminaire |
|--------|--------|----------------|
| 0-30   | 93     | 27.4           |
| 0-40   | 152    | 44.8           |
| 0-60   | 267    | 78.6           |
| 0-90   | 339    | 99.9           |
| 90-180 | 0.51   | 0.1            |
| 0-180  | 340    | 100            |

### Performance Data

| Model Number | Lumens | Watts | Lumens/Watt |
|--------------|--------|-------|-------------|
| DLE321202KRD | 340    | 6.0   | 56.67       |
| DLE321203KRD | 350    | 6.0   | 58.31       |
| DLE321204KRD | 359    | 6.0   | 59.84       |
| DLE321205KRD | 367    | 6.0   | 61.09       |

### Recommended Dimmers\*

- Lutron Toggler TGCL-153P
- Lutron Skylark SCL-153P
- Lutron DIVA DVCL-153P
- Leviton C22-06672-1LW
- Lutron Caseta PD-6WCL

\*Not a complete list. Check compatibility before installation.

## Ordering Information

Example: DLE321203KRDWH

| Series | Version       | Voltage | CCT's       | Trim Shape | Trim Color |
|--------|---------------|---------|-------------|------------|------------|
| DLE3   | 2 (Version 2) | 120     | 2K (2700 K) | RD (Round) | WH (White) |
|        |               |         | 3K (3000 K) |            |            |
|        |               |         | 4K (4000 K) |            |            |
|        |               |         | 5K (5000 K) |            |            |

Specifications and dimensions subject to change without notice

### Accessories

accessories sold separately

|                                   |                      |
|-----------------------------------|----------------------|
| 3" Rough In Template              | ROUGHIN-TEMPLATE-3   |
| 3" AGED COPPER TRIM RING          | DLE3-TR-AC           |
| 3" BLACK TRIM RING                | DLE3-TR-BK           |
| 3" BRUSHED NICKEL TRIM RING       | DLE3-TR-NK           |
| 10' Extension Cable               | DRIVER-EXTCABLE-10   |
| 20' Extension Cable               | DRIVER-EXTCABLE-20   |
| 3", 4", 6" Rough In Flat Template | ROUGHIN-TEMPLATE-346 |