


# Installation Guide

## Deck-Mount Bath Filler

K-8360



**M** product numbers are for Mexico (i.e. K-12345**M**)  
Los números de productos seguidos de  
**M** corresponden a México (Ej.  
K-12345**M**)  
Français, page "Français-1"  
Español, página "Español-1"

THE BOLD LOOK  
OF **KOHLER**®

1082513-2-A

## Tools and Materials




1/8" Hex Wrench

**Plus:**  
• Rags

## Before You Begin

- Observe all local plumbing and building codes.
- Shut off the water supply.
- The valve is sold separately. Please read the instructions packed with the valve for installation procedures.
- Complete the finished deck material before installing the product.
- Kohler Co. reserves the right to make revisions in the design of faucets without notice, as specified in the Price Book.

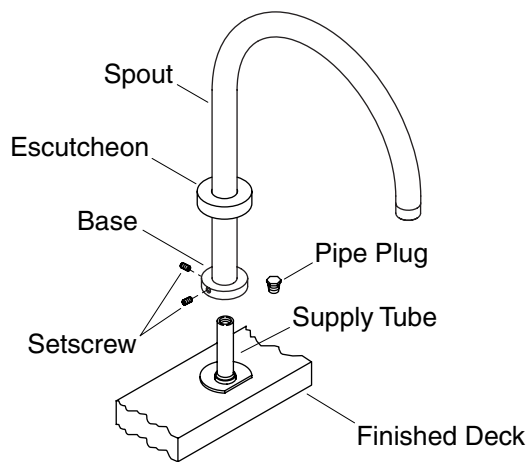


## 1. Install the Spout



**CAUTION: Risk of personal injury.** Do not lean over the pipe plug when turning or removing the plug. The lines may be pressurized.

**NOTICE:** Keep the supply tube clean above the finished deck. This will prevent damage to the O-ring seal (not shown) in the base of the spout.

- Remove the plaster guard (not shown) from the supply tube.
- Wrap a rag around the pipe plug. This will prevent water from spraying as the pipe plug is being removed.
- Remove the pipe plug from the supply tube.
- Slide the escutcheon up the spout.
- Using a 1/8" hex wrench, back the setscrews off at the base of the spout just enough to allow clearance for the supply tube.
- Position the spout on the supply tube, then carefully press down until the spout contacts the finished deck.
- Align the spout as desired, then tighten the setscrews at the base.
- Slide the escutcheon down the spout until it is flush with the finished deck.

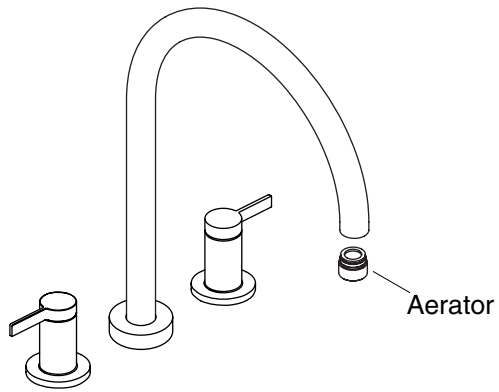

## 2. Complete the Installation

- Install the handles following the handle manufacturer's installation instructions.
- Remove the aerator.
- Turn on the main water supply and check for leaks.
- Turn on the hot and cold valves and run water through the spout to remove debris. Check for leaks.
- Turn off the hot and cold valves.
- Reinstall the aerator.