
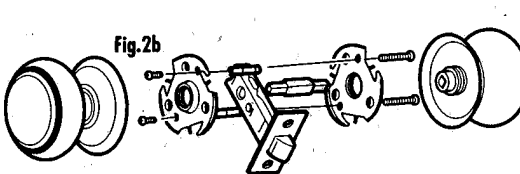


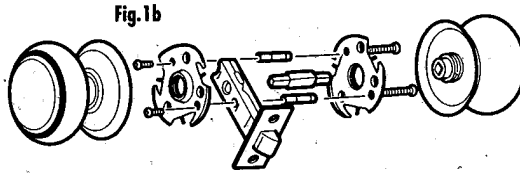



Instructions for Gainsborough Passage Set

Installation procedures for Gainsborough Passage set when used in conjunction with Gainsborough Dual Sprung latches for internal doors 33mm - 40mm (1 1/4" - 1 5/8") in thickness. For thicker doors, up to 50mm (2"), you will require an extended screw and spindle kit (KT125).

1. Scribe drilling centres using appropriate template (see below).
2. Drill door as shown at Fig.1/1a for 3 hole Dual Sprung latch system, or as shown in Fig.2/2a for 3 hole straddle latch system. Mark and chisel latch face and fit latch.
3. Insert short screws through 2 small holes and attach the 2 posts to underside of one fixing plate.
4. Insert posts through door and latch, fit 2nd plate, ensure central fitting and secure with long screws.
5. Insert spindle through the latch and screw the door knob assemblies to fixing plates until roses make firm contact with door.



3 Hole Dual Sprung-refer template (alternatively, drill 50/54mm hole through door face)

3 Hole Straddle-refer template (alternatively, drill 50/54mm hole through door face)

