

Location:



S-3604-H321-V-TRM, S3604H321TRMTC
Tub/Hand Shower Trim
Specification Submittal



Model Numbers

- S-3604-H321-V-TRM** Tub/Hand Shower Trim with integral diverter control, Temptrol Pressure Balancing Tub/Shower Valve ordered separately
- S3604H321TRMTC** Tub/Hand Shower Trim with integral diverter control, TA-10 flow control spindle and T-12A cap assembly, must order Temptrol valve with Test Cap

Options/ Modifications

- 1.5**  **1.5 gpm (5.7 L/min) flow restrictor**
- STN** **Satin Nickel finish**
- MB** **Matte Black finish**
- BBZ** **Brushed Bronze finish**

Note: Append appropriate -suffix to model number.

Compliance

- ASME A112.18.1/CSA B125.1
- WaterSense 1.5 gpm (5.7 L/min)
2.0 gpm (7.6 L/min)



Feature Highlights

- Duro Tub/Hand Shower Trim
- Requires Temptrol® Pressure Balancing Tub/Shower Valve
- Integral diverter control
- Metal lever handle
- 7" non-diverter tub spout
- 30" slide bar for hand shower
- 60" flexible metal hose
- 1 mode hand shower
- Dual checks for backflow protection
- 2.0 gpm (7.6 L/min) flow restrictor
- Components shall be metal and nonmetallic construction, plated in standard Polished Chrome finish
- Available with TA-10 flow control spindle and T-12A cap assembly for Temptrol valve bodies installed with Test Cap (order p/n S3604H321TRMTC)
- For optional in-line vacuum breaker order p/n EF-109

Warranty

Limited Lifetime - to the original end purchaser in consumer/residential installations.


10 Years - for commercial/industrial installations. Refer to www.symmons.com/warranty for complete warranty information.



Architectural/ Engineering Specification

Symmons Duro Tub and Hand Shower Trim _____ Includes Duro Tub and Hand Shower Trim, Requires Temptrol® Pressure Balancing Tub and Shower Valve, Integral diverter control, Metal lever handle, 7" non-diverter tub spout, 30" slide bar for hand shower, 60" flexible metal hose, 1 mode hand shower, Dual checks for backflow protection, 2.0 gpm (7.6 L/min) flow restrictor, Components shall be metal and nonmetallic construction, plated in standard Polished Chrome finish, Available with TA-10 flow control spindle and T-12A cap assembly for Temptrol valve bodies installed with Test Cap (order p/n S3604H321TRMTC), For optional in-line vacuum breaker order p/n EF-109. 10 Year Commercial Warranty. ASME A112.18.1/CSA B125.1, WaterSense 1.5 gpm (5.7 L/min), 2.0 gpm (7.6 L/min) compliant. Available options: "1.5 - 1.5 gpm (5.7 L/min) flow restrictor", "STN - Satin Nickel finish", "MB -Matte Black finish", "BBZ - Brushed Bronze finish".

Dimensions

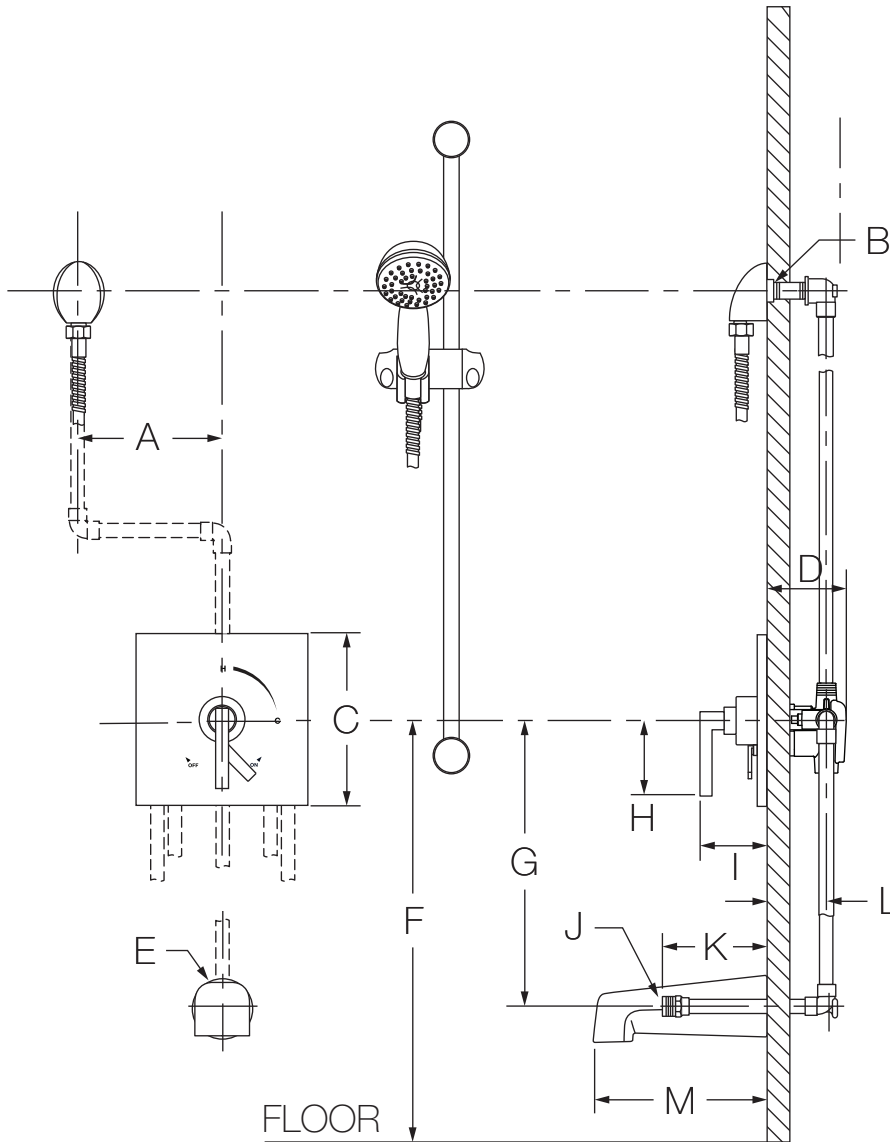

Measurements	
A	6", 152 mm
B	Male 1/2-14 NPT thread must be recessed 1/4" (6 mm) from finished wall
C	Sq. 7-1/2", 191 mm
D	3-1/2", 89 mm
E	Ø 2-1/2", 64 mm
F	Ref. 32", 813 mm
G	Ref. 12", 305 mm
H	3-1/8", 79 mm
I	3-1/2", 89 mm
J	Male 1/2-14 NPT fitting must protrude 5-1/4" (133 mm) from finished wall
K	5-1/4", 133 mm
L	Rough-in 2-3/8" ± 1/2", 60 mm ± 13 mm
M	7", 178 mm

Notes:

- 1) Valve body and piping not included and shown as reference only.
- 2) Plaster shield (p/n T-176) for dry wall, plaster or other type walls 1/2" or greater.
- 3) All dimensions measured from nominal rough-in (see L as reference).
- 4) Dimensions subject to change without notice.