

INSTALLATION INSTRUCTIONS

Item#18766-860 (New. 2025/09/30)

READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.

AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

MOUNTING THE FIXTURE (Fig.1)

1. Shut off the power at the circuit breaker and remove the old fixture, including the mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts on a clean area. Take care not to lose any small parts necessary for installation.
3. Unscrew finials (H), remove shade (G) from fixture.
4. Position mounting plate (A) on the ceiling and mark location of the three mounting holes. Pre-drill holes for plastic anchors (C). Insert plastic anchors (C) into ceiling.
5. Attached mounting plate (A) to outlet box (Not included) using mounting screws (B) (Size: #8-32N*L1"). The side of mounting plate (A) marked with "GND" must face out. Secure mounting plate (A) by inserting wood screws (D) through holes on mounting plate into the plastic anchors (C).
6. The support cable is provided to support the weight of fixture while wiring. Align fixture to mounting plate (A) and attach hook on end of support cable (J) into a slot located on mounting plate (A). Carefully allow support cable (J) to support weight of fixture while wiring (Fig.1).

CONNECTING THE WIRES (Fig. 2)

7. Connect the electrical wires as shown in Fig.2, making sure that all wire connectors are secured. If your outlet has a ground wire (green or bare copper), connect fixture's ground wire to it. Otherwise, connect fixture's ground wire directly to mounting plate (A) using green screw provided.
8. Tuck the wire connectors neatly into outlet box.

FINISHING THE INSTALLATION (Fig.1)

9. Raise fixture (E) over mounting plate (A) and secure with canopy screws (F).
10. Install (3) three candelabra base bulbs up to 60 watts each or CFL or LED equivalent (not included) in accordance with the fixture specification. —DO NOT EXCEED THE MAXIMUM WATTAGE RATING! (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)
11. Attach shade (G) to the fixture, securing in place with finials (H).
12. Hook alabaster pieces (I) into the shade (G) as shown in the diagram (Fig.1).

Your installation is now complete. Return power to outlet box and test the fixture.

Note: Illustration (Fig.1) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.

ATTENTION: You have purchased a product made with natural materials. It will exhibit naturally formed pits, voids, surface imperfections, and coloring variations not controlled by manufacturing. The appearance of natural materials can be affected by household cleansers and dirt. Please test any intended cleansers in an obscure location before applying to the visible surfaces.

Fig. 1

Set#

- Mounting Screw *2
- Green Screw
- Mounting Plate
- Plastic anchor*3
- Wood screw*3

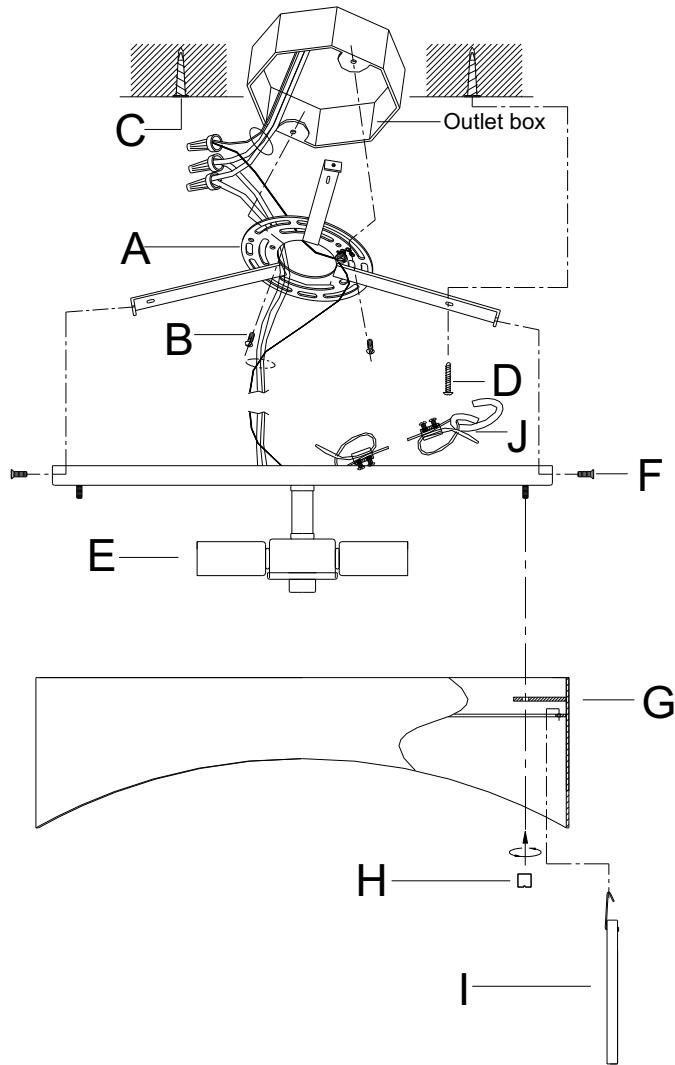


Fig. 2

