

MIC® Tight-Buffered Cable, Plenum 12 F, 50 µm multimode (OM3)



Part Number:
012T88-33180-29

Corning MIC® plenum cables are designed for use in plenum, riser and general purpose environments for intrabuilding backbone and horizontal installations. These multifiber cables use 900 µm buffered fibers to allow easy, consistent stripping and to facilitate termination. The fibers are surrounded by dielectric strength members and protected by a flame-retardant outer jacket. The all-dielectric cable construction requires no grounding or bonding. MIC plenum cables are ideal for routing inside buildings, within plenum areas and riser shafts, to the telecommunications rooms and workstations. The MIC plenum cables meet the application requirements of the National Electrical Code® (NEC®) Article 770 and are OFNP and FT-6 listed.

Features and Benefits

900 µm buffered fibers


Easy, consistent stripping

All-dielectric construction


Requires no grounding or bonding

Flame-retardant jacket

Rugged and durable

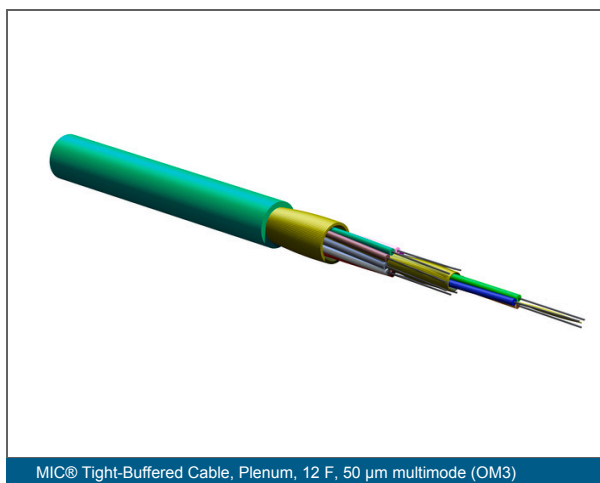

MIC® Tight-Buffered Cable, Plenum, 12 F, 50 µm multimode (OM3)

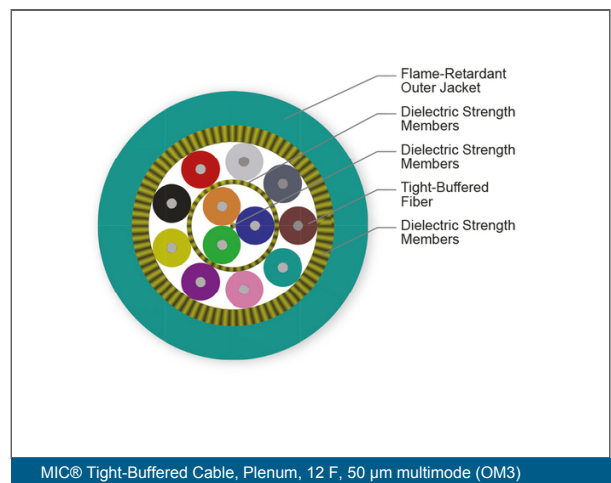

MIC® Tight-Buffered Cable, Plenum, 12 F, 50 µm multimode (OM3)

MIC® Tight-Buffered Cable, Plenum 12 F, 50 µm multimode (OM3)



Specifications

General Specifications	
Environment	Indoor
Cable Type	Tight-Buffered
Product Type	Distribution
Fiber Category	50 µm MM (OM3)
Flame Rating	Plenum (OFNP)
Application	General Purpose Horizontal, Plenum, Vertical Riser
Fiber Count	12

Standards	
Approvals and Listings	National Electrical Code® (NEC®) OFNP, NFPA 262, CSA FT-6, ICEA S-83-596
Flame Test Method	NFPA 262 and CSA FT-6 (for plenum, riser and general building applications), ICEA S-83-596

Environmental Conditions	
Temperature Range, Installation	0 °C to 60 °C (32 °F to 140 °F)
Temperature Range, Operation	0 °C to 70 °C (32 °F to 158 °F)
Temperature Range, Storage	-40 °C to 70 °C (-40 °F to 158 °F)

Cable Design	
Central Element	Yarn
Fiber Count	12
Outer Jacket Color	Aqua
Outer Jacket Material	Flame-retardant
Tensile Strength Elements and/or Armoring - Layer 1	Dielectric strength members
Tensile Strength Elements and/or Armoring - Layer 2	Dielectric strength members

MIC® Tight-Buffered Cable, Plenum 12 F, 50 µm multimode (OM3)



Cable Design

Tight Buffer Color	Blue, Orange, Green
Tight Buffer Color, Layer 2	Brown, Slate, White, Red, Black, Yellow, Violet, Rose, Aqua
Flame Rating	Plenum (OFNP)

Mechanical Specifications

Max. Tensile Strength, Long-Term, ≤12F	132 N (29.67 lbf)
Max. Tensile Strength, Long-Term, >12F	200 N (44.96 lbf)
Max. Tensile Strength, Short-Term, ≤12F	440 N (98.92 lbf)
Max. Tensile Strength, Short-Term, >12F	660 N (148.37 lbf)
Min. Bend Radius Installation	92 mm (3.62 in)
Min. Bend Radius Operation	60 mm (2.36 in)
Nominal Outer Diameter	6 mm (0.24 in)

Optical Characteristics

Fiber Code	T
Fiber Type	Multimode
Performance Option Code	80
Fiber Core Diameter	50 µm
Minimum Effective Modal Bandwidth (EMB)	2000 MHz*km / -
Maximum Attenuation	2.8 dB/km / 1.0 dB/km
Min. Overfilled Launch (OFL) Bandwidth	1500 MHz*km / 500 MHz*km
Serial 1 Gigabit Ethernet	1000 MHz*km / 600 MHz*km
Serial 10 Gigabit Ethernet	300 MHz*km / -
Wavelengths	850 nm / 1300 nm
Fiber Category	OM3

MIC® Tight-Buffered Cable, Plenum 12 F, 50 µm multimode (OM3)



Ordering Information	
Product Number	012T88-33180-29
EAN Code	4056418181424
Weight	3.38 kg/km (2.27 lb/1000 ft)



Corning Optical Communications LLC • 4200 Corning Place • Charlotte, NC • 28216 • United States
800-743-2675 • FAX: 828-325-5060 • International: +1-828-901-5000 • www.corning.com/opcomm

A complete listing of the trademarks of Corning Optical Communications is available at www.corning.com/opcomm/trademarks. All other trademarks are the properties of their respective owners. Corning Optical Communications is ISO 9001 certified. © 2023 Corning Optical Communications. All rights reserved.