SYMMONS® Dia®



3595BTRM
Shower/Hand Shower Trim
Specification Submittal

Location:

Model Numbers

☐ **3595BTRM**
Shower/Hand Shower System Trim

Valve Options:
- 261 Series Temptrol® Shower Valve with TRM modifier
- 161 Series Temptrol Shower Valve requires TC modifier
- 2DIVBODYSRT Diverter Valve

Feature Highlights

- Dia Shower/Hand Shower Trim.
- Requires Temptrol Pressure-Balancing Shower Valve.
- 30” slide bar.
- Separate two-function diverter.
- Metal lever handle.
- 60” flexible metal hose.
- 7-mode HydroMersion™ hand shower with Non-Positive Shutoff (NPSO).
- 7-mode HydroMersion showerhead with Non-Positive Shutoff (NPSO).
- Dual check valves for backflow protection.
- Standard 2.0 gpm (7.6 L/min) flow restrictors.
- Components are made from metal and nonmetal materials plated in standard Polished Chrome finish.

Compliance

- ASME® A112.18.1/CSA® B125.1
- WaterSense® 1.5 gpm (5.7 L/min) 1.75 gpm (6.6 L/min) 2.0 gpm (7.6 L/min)
- Lever handle meets ADA requirements for operation

Modifications

☐	**15**	1.5 gpm (5.7 L/min) flow restrictor
☐	**175**	1.75 gpm (6.6 L/min) flow restrictor
☐	**Delete Suffix B**	Chrome plastic escutcheon on valve with color graphics/indicators in place of standard brass escutcheon
☐	**L1**	Less showerhead
☐	**L2**	Less hand shower wand
☐	**L3**	Less showerhead and hand shower wand
☐	**L4**	Less showerhead, shower arm, and flange
☐	**L5**	Less hand shower system (less bar/cradle, hose, wand, and elbow)
☐	**L7**	Less handle
☐	**BBZ**	Brushed Bronze finish
☐	**MB**	Matte Black finish
☐	**STN**	Satin Nickel finish
☐	**1L**	1-Inch Spindle Extension
☐	**TC**	Test Cap Trim (includes TA-10™ & T-12A) *used with 161 Series Temptrol Valve*

Warranty

Limited Lifetime - for residential installations.
10 Years - for commercial/industrial installations.
Refer to www.symmons.com/warranty for complete warranty information.

SKU Builder

Series	Finish	Modifier	Flow Rate	Trim (required)	Test Cap	1L	Final SKU
3595B	MB	L1	175	TRM	TC		3595BMBL1175TRMTC
3595	BBZ	L7		TRM		1L	3595BBZL7TRM1L

Notes: No more than two modifiers (L1-L7) permitted when ordering. Modifiers will list in numerical order.

Architectural/Engineering Specification

Symmons Dia Shower and Hand Shower System _____ Includes Dia shower trim for Temptrol® Pressure-Balancing Shower Valve. Features 30” slide bar, 60” flexible metal hose, 7-mode HydroMersion hand shower with NPSO, 7-mode HydroMersion showerhead with NPSO, dual check valves for backflow protection and standard 2.0 gpm (7.6 L/min) flow restrictors. Components made from metal and nonmetal materials plated in standard Polished Chrome finish. 10-Year Commercial Warranty. Lever handle meets ADA requirements for operation. ASME A112.18.1/CSA B125.1, WaterSense 1.5 gpm (5.7 L/min), 1.75 gpm (6.6 L/min), and 2.0 gpm (7.6 L/min) compliant. Available options: 15 = 1.5 gpm (5.7 L/min) flow restrictor, 175 = 1.75 gpm (6.6 L/min) flow restrictor, Delete Suffix B = Chrome plastic escutcheon, L1 = Less showerhead, L2 = Less hand shower wand, L3 = Less showerhead and hand shower wand, L4 = Less showerhead, shower arm, and flange, L5 = Less hand shower system, L7 = Less handle, BBZ = Brushed Bronze finish, MB = Matte Black finish, STN = Satin Nickel finish, 1L = 1-Inch spindle extension, and TC = Test Cap Trim.

Symmons Industries, Inc. ▪ 31 Brooks Drive ▪ Braintree, MA 02184 ▪ Phone: (800) 796-6667 ▪ Fax: (800) 961-9621
Copyright © 2026 Symmons Industries, Inc.

Dimensions

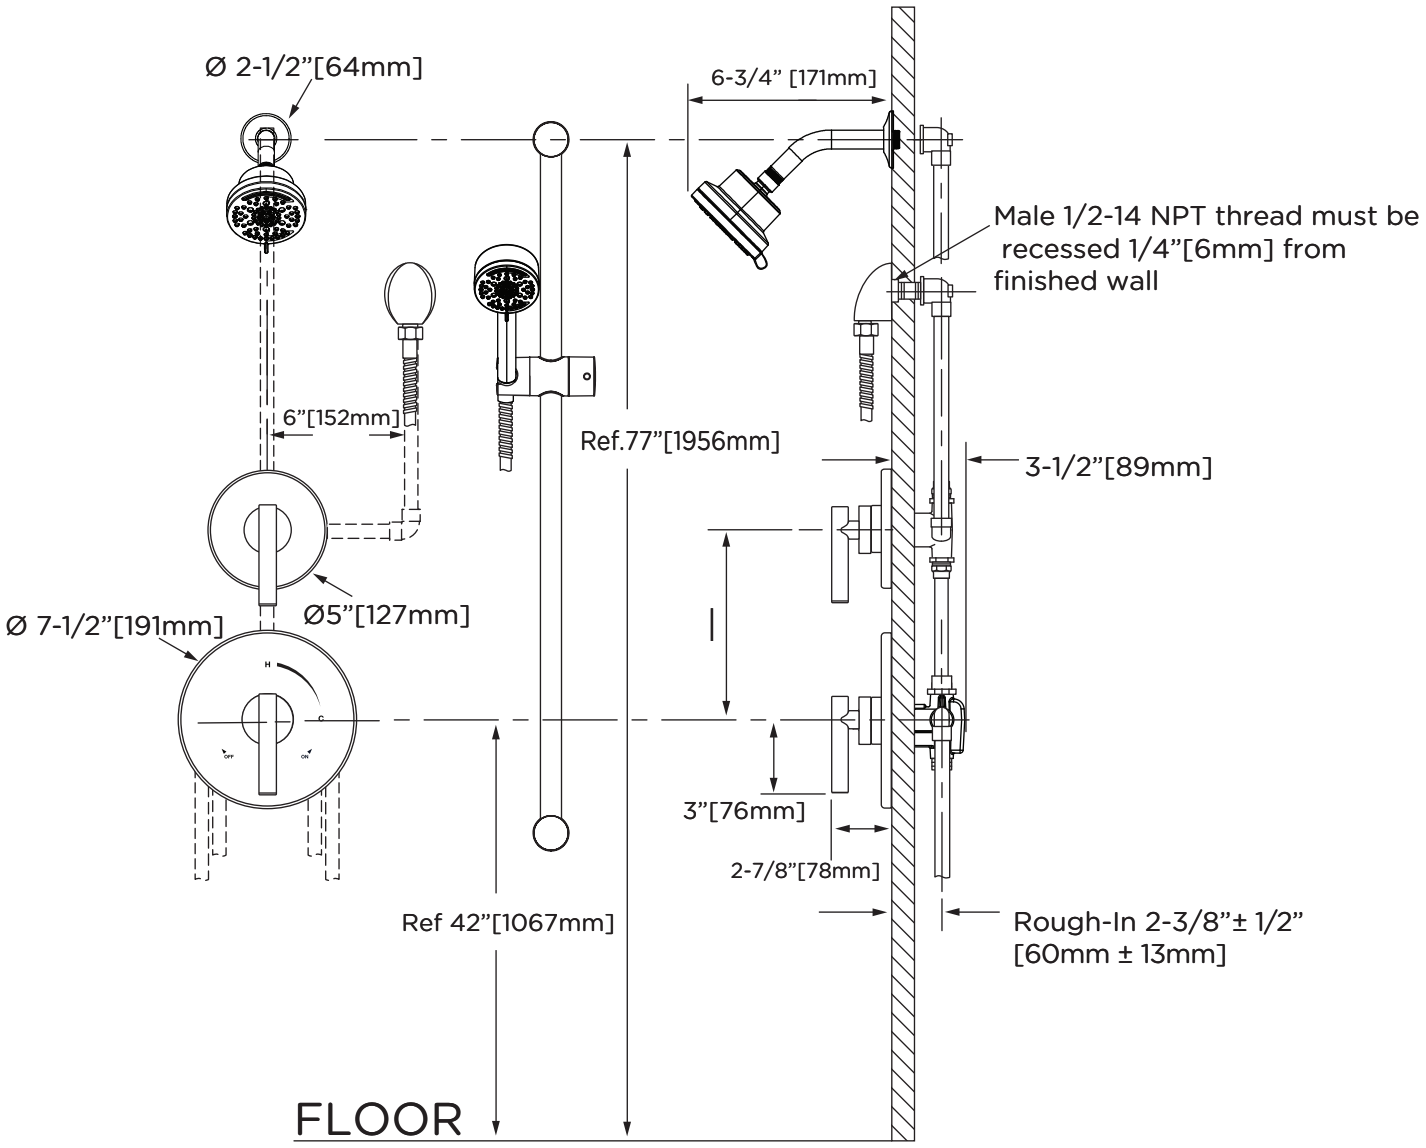

Notes:

1) Valve body and piping not included and shown as reference only.
2) Plaster shield (p/n T-176) from drywall, plaster, or other type walls 1/2" or greater.
3) All dimensions measured from nominal rough-in.
4) Dimensions are subject to change without notice.

Copyright © 2026 Symmons Industries, Inc. ▪ symmons.com ▪ gethelp@symmons.com ▪ ZV-3958 REV B ▪ 090126