
$\mathsf{Daroca}^\mathsf{TM}$ brings the warmth of nature into a modern porcelain tile. Inspired by the look of travertine in warm and cool tones, $\mathsf{Daroca}^\mathsf{TM}$ is ideal for any application.





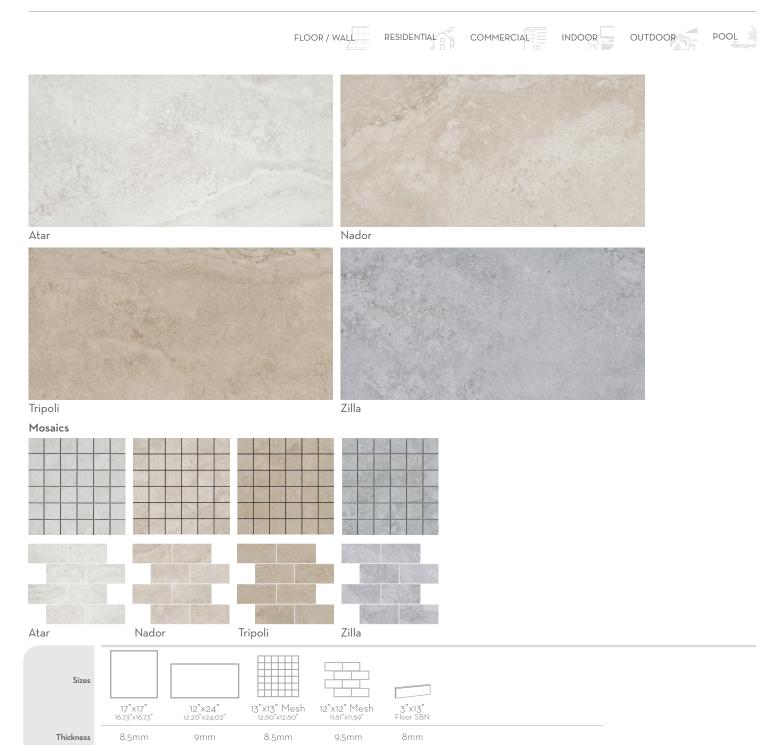

	Results*	III
80	Sustainability Attributes	

Testing

Faces

Finish

Edge

Grout Joint

Recommendation

20

Matte

Pressed

3/16"

Abrasion Resistance

- Red List Free
- eclaration (HPD) provided upon request
- Product Packaging is 100% recyclable
- VOC Free

Resistant

N/A

Matte

Cut

3/16"

Chemical Resistance

N/A

Matte

Cut

3/16"

<0.50%

Water Absorption

N/A

Matte

Cut/Rounded

3/16"

DCOF ANSI

>0.50

Scratch Hardness

8

Shade Variation

Rating

۷з

Product and Installation Details | ANSI A108.02 Section 4.3.8.2 - For running bond/brick joing patterns utilizing tiles (square or rectangular) where the side being offset is greater than 18" (nominal dimension), the running bond offset will be a maximum of 33% unless otherwise specified by the tile manufacturer. If an offset greater than 33% is specified, specifier and owner must approve mock-up and lippage.



20

Matte

 ${\sf Pressed}$

3/16"

>450 lbf

Breaking Strength