LOW VOLTAGE INSULATOR, IMPERIAL , 1.375", 1 3/4" HEX WIDTH, 2.02", 3/8 UNC

CATALOG NUMBER

ISO1-38-38



CERTIFICATIONS

FEATURES

- Great stability of electrical and mechanical parameters
- High resistance to leakage current
- UL® Recognized in E125470 and evaluated for dielectric withstand rating of 1,500 VAC/DC
- Halogen free
- RoHS compliant

PRODUCT ATTRIBUTES

- Article Number: 559650
- Material: Glass Fibre Reinforced Polyester;Steel
- Finish: Electrogalvanized
- Working Temperature: -40 to 266 °F
- Flammability Rating: UL® 94V-0
- Height (H): 1 3/8"
- Hex Width (W): 1 3/4"

Depth (D): 2.02

Thread Size (TS): 3/8" UNC

Thread Depth (TD): 3/8"

Diameter (Ø): 1.43"

Insulation Voltage: 1500

Static Load 1 (F1): 2300lb


Static Load 2 (F2): 1200lb

Unit Weight: 0.21 lb

ADDITIONAL PRODUCT DETAILS

Creepage and clearance distances need to be in accordance with the relevant application standard.

DIAGRAMS

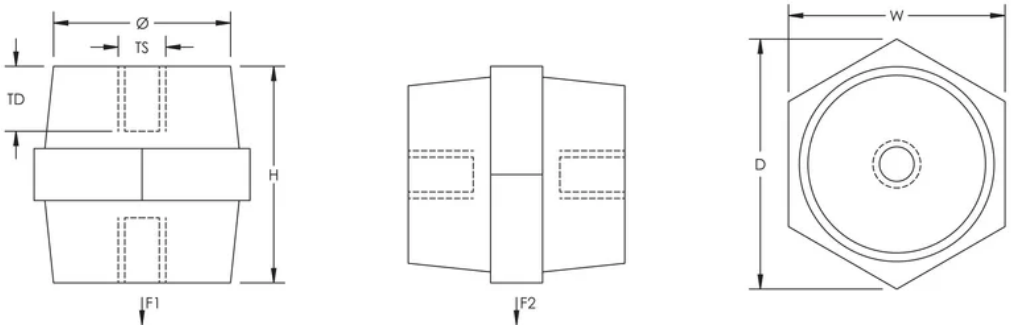

WARNING

nVent products shall be installed and used only as indicated in nVent's product instruction sheets and training materials. Instruction sheets are available at www.nvent.com and from your nVent customer service representative. Improper installation, misuse, misapplication or other failure to completely follow nVent's instructions and warnings may cause product malfunction, property damage, serious bodily injury and death and/or void your warranty.

North America
+1.800.753.9221
Option 1 – Customer Care
Option 2 – Technical Support

Europe
Netherlands:
+31 800-0200135
France:
+33 800 901 793

Europe
Germany:
800 1890272
Other Countries:
+31 13 5835404

APAC
Shanghai:
+ 86 21 2412 1618/19
Sydney:
+61 2 9751 8500

Our powerful portfolio of brands:
nVent.com CADDY ERICO HOFFMAN RAYCHEM SCHROFF TRACER

© 2025 nVent. All nVent marks and logos are owned or licensed by nVent Services GmbH or its affiliates. All other trademarks are the property of their respective owners.

nVent reserves the right to change specifications without notice.