

TECHNICAL INFORMATION







Stock

pattern ≤33%










Recommend offset Frost Resistant Water Absorption: 10-16%

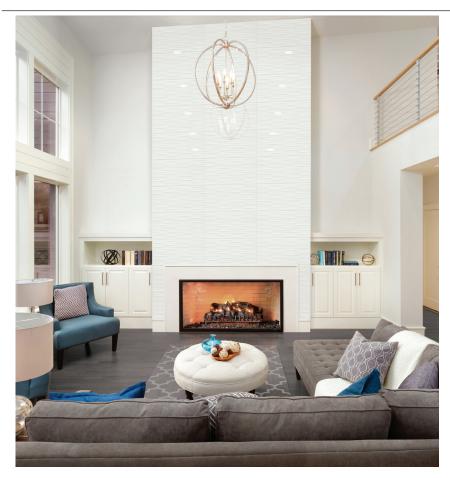

Tiles, Mosaic and Trim*

SIZE	ACTUAL	THICKNESS	FINISH
12" x 24" Rectified	12" x 24"	10mm	Gloss
12" x 24" Rectified	12" x 24"	10mm	Matte/ Natural
12" x 24" Flow Decorative Rectified	12" x 24"	10mm	Gloss
12" x 24" Horizon Decorative Rectified	12" x 24"	10mm	Gloss
12" x 24" Perspective Decorative Rectified	12" x 24"	10mm	Gloss
12" x 24" Recede Decorative Rectified	12" x 24"	10mm	Gloss
0.354" x 12" Quarter Round	0" x 12"	9mm	Matte/ Natural
0.354" x 12" Quarter Round	0" x 12"	9mm	Gloss

^{*} Not all sizes are available in all colors and finishes.

COLORS



White CTI FRWH



White Horizon CTI FRWH HORIZON



White Recede CTI FRWH RECEDE



White Perspective CTI FRWH PERSPEC



White Flow CTI FRWH FLOW

Performance Characteristics

Breaking Strength	> 230 lbf
Chemical Resistance	N/A
DCOF	N/A
Deep Scratch Resistance - Unglazed	N/A
Frost Resistance	Not Resistant
Mohs Hardness - EN101	4
Water Absorption	10-16%
Certifications	EPD Greenguard
Country of Origin	Turkey
Shade Variation Code	V1

Application**

	WALL	FLOOR
Residential	•	
Commercial	•	
Heavy Commercial	•	
Residential/Commercial		
	Commercial Heavy Commercial	Residential • Commercial • Heavy Commercial •

^{**} These recommendations are not defined by ANSI Standards

