



ELDON 4/5-LIGHT MED/LG CHANDELIER

DJC1194; DJC1205

General Product Information



Suggested/Required Tools




Safety Information

CAUTION-RISK OF FIRE


This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.


USE MINIMUM 90°C SUPPLY CONDUCTORS.



Turn off electrical current at the source before working with any lighting fixture or portable lamp.

Install and use this product in adherence with local electrical codes and regulations.

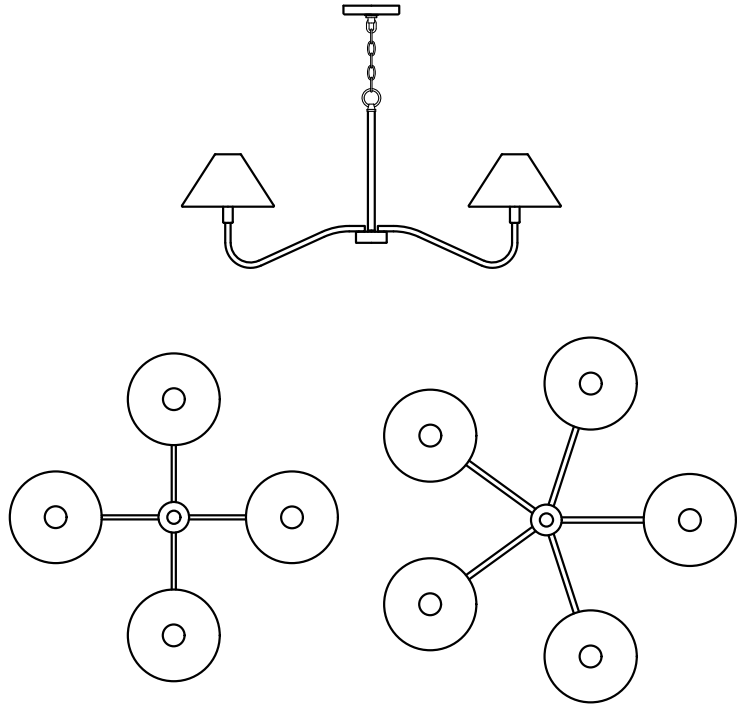

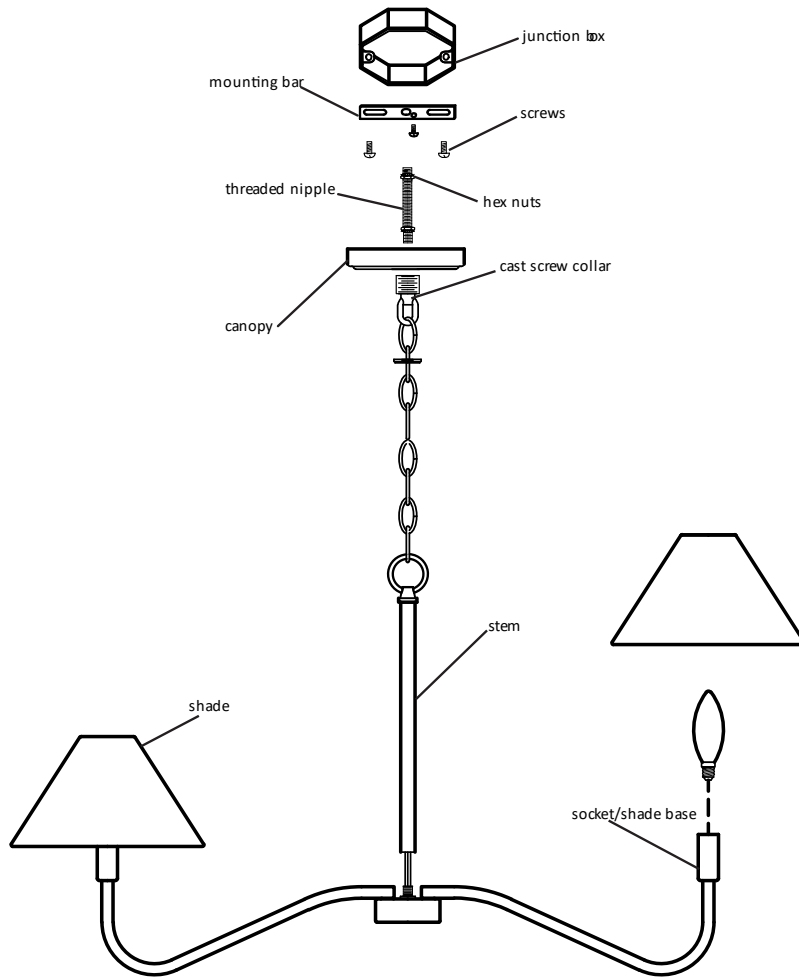

INSTRUCTIONS

I. Preparing the Fixture

1. Install the mounting plate to the junction box.
2. Shorten the chain as needed using the chain pliers.
3. Use the hex nuts to tighten the threaded nipple to the mounting plate.
4. Screw the threaded nipple onto the mounting plate, then attach the canopy and cast screw collar onto the threaded nipple.

II. Wiring the Fixture

1. Feed the cord through the stem and screw it onto the fixture.
2. Thread the fixture wire and ground wire through the chain.
3. Wrap the fixture ground wire to the green ground screw on the mounting plate and secure.
4. Connect the following using a wire nut:
 - a) Fixture ground wire to the ground wire
 - b) Fixture neutral wire to the supply neutral wire
 - c) Fixture hot wire to the supply hot wire
5. Tuck all wires into the junction box.

III. Installing the Fixture

1. Loosen the cast screw collar and let the canopy slip down the chain carefully.
2. Install the canopy to the junction box and secure it with the collar ring.
3. Insert the bulb(s) into the socket(s) and secure the pendant shade.