


POLYETHYLENE PIPE WRAP TAPE

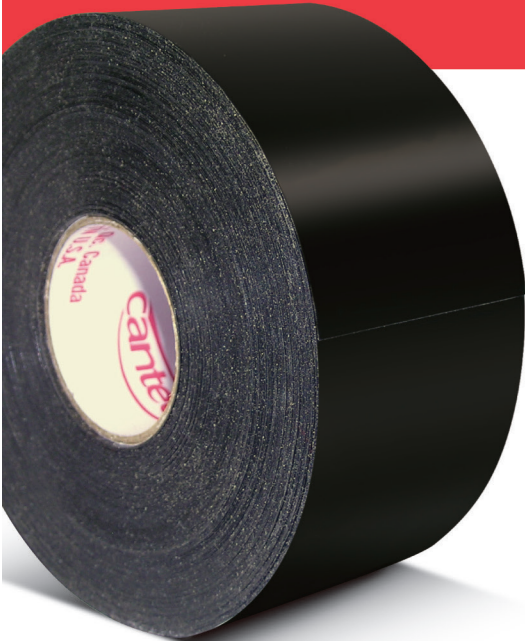

DESCRIPTION

This tape is made of a black polyethylene film coated with an aggressive butyl rubber based adhesive. This tape meets the Uniform Plumbing Code® as per IAPMO standards PS 37-90 for pipe wrapping.

MAIN FEATURES

- Excellent corrosion and abrasion resistance.
- Long lasting butyl rubber based adhesive.
- High humidity resistance.
- Excellent dielectric strength.
- Heavy duty polyethylene film.
- This tape has a neutral PH.

APPLICATION

- Ideal for protection of underground and above ground pipelines.

TECHNICAL DATA

Colour	Black
Backing	Polyethylene film
Adhesive.....	Butyl rubber based
Thickness	10 mil
Adhesion to steel.....	80 oz/in
Adhesion to backing	40 oz/in
Tensile strength.....	26 lb/in
Elongation.....	130%
Dielectric strength.....	12,000 Volts
Operating Temperature	-10°C (14°F) to 40°C (104°F)
Temperature Resistance	-35°C (-31°F) to 90°C (194°F)

CORROSION RESISTANT

LONG LASTING ADHESION

Please note:

While we believe them to be reliable, the statements and information herein are only for general guidance and are not warrants or guarantees for accuracy and completeness.

The user must, by test or otherwise, determine suitability for this purpose. There is no warranty of fitness for a particular purpose. Our standard term and conditions of sale apply exclusively to all orders, and all liability for damages of any kind, including consequential, exceeding purchase price is excluded.

No one is authorized by us to make oral warranties. We reserve the right to make changes without notice or obligation in our products and publications.



Tape application on oil pipeline.