


AL-Foil+Adhesive-PET  
 Drain wire: 1C/0.32BC  
 Insulation:FPE ID:  $\varnothing 0.9 \pm 0.05\text{mm}$  (1P)  
 Conductor: 1C/0.32BC

AL-Foil  
 AL-Foil+Adhesive-PET  
 Drain wire: 1C/0.32BC+HDPE ID:0.7  
 Insulation:FPE ID:  $\varnothing 1.5 \pm 0.05\text{mm}$  (4P)  
 Conductor: 1C/0.511BC  
 Insulation:HDPE ID:  $\varnothing 0.7 \pm 0.05\text{mm}$  (3C)  
 Conductor: 1C/0.32BC  
 Braid Shield:16/10/0.12AL  
 Drain wire: 1C/0.32BC  
 Black TPE Jacket OD:  $\varnothing 9.0\text{mm}$

### PIN Assignment

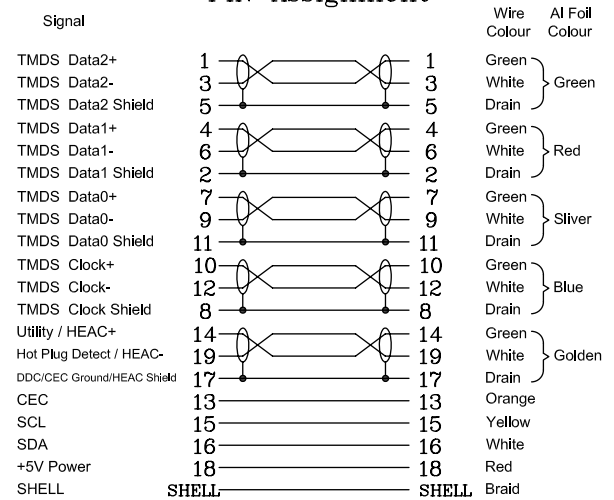

### ELECTRICAL TEST:

- 100% OPEN SHORT MISS WIRE TEST
- CONTACT RESISTANCE:5 OHM MAX
- INSULATION RESISTANCE:5M OHM MIN
- HI-POT TEST:DC 300V/10ms
- The product is ROHS compliant.
- HDTV-DVD TEST:4K@60HZ
- PASS 18G eye diagram

NO.	PART NAME	SPECIFICATION
⑦	CAP	Dust cap
⑥	MODEL	60A Yellow(PT123C) TPE (Second)
⑤	MODEL	80A Black TPE (First)
④	MODEL	PE
③	FOIL	Copper Foil 27*L70MM
②	PLUG	HDMI AM Connector, Gold Plated 1U"
①	CABLE	[(1/0.511BC+FPE1.5)*2C+D1/0.32BC+PE0.7+AL+HPET]*4P+[(1/0.32BC+FPE0.9)*2C+D1/0.32BC+AL+HPET]*1P+(1/0.511BC+PE0.95)*1C+[(1/0.32BC+PE0.85)*3C+AL+D1/0.32BC+160#/0.12AM+Black TPE OD9.0±0.2mm]

SKU	LENGTH
HDMI2-CABLE-4K60-20F	6096 <sup>+50</sup> <sub>-0</sub> mm
HDMI2-CABLE-4K60-7M	7000 <sup>+50</sup> <sub>-0</sub> mm
HDMI2-CABLE-4K60-25F	7620 <sup>+50</sup> <sub>-0</sub> mm

THIRD ANGLE PROJECTION

# StarTech.com

GENERAL NOTES	
DIMENSIONS ARE IN MM - DO NOT SCALE	PRODUCT ID: HDMI2-CABLE-4K60-(20F/7M/25F)
THIS DOCUMENT CONTAINS CONFIDENTIAL, PROPRIETARY INFORMATION THAT IS PROPERTY OF STARTECH.COM	DESCRIPTION: Premium Certified High Speed HDMI Cable, 4K 60Hz/1440p 144Hz
<b>DO NOT SCALE</b>	SHEET: 1 OF: 1      UPLOAD DATE: 9/05/2025