


SECTION A-A
SCALE 2 : 1

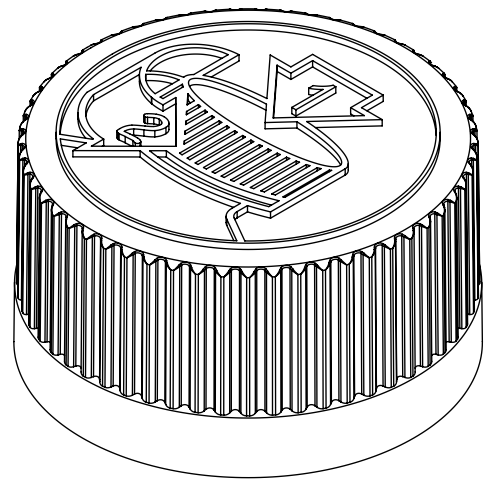

STATIC TORQUE RECOMMENDATION: 10-18 in-lbs
 REQUIREMENT MAY VARY DEPENDING UPON CONTAINER MATERIAL,
 NECK FINISH, AND CAPPING EQUIPMENT

REFERENCE	DIMENSION	TOLERANCE	UNITS
E	0.865 [21.97]	±0.010 [0.25]	in [mm]
T	0.950 [24.13]	±0.010 [0.25]	in [mm]
H (SEATED)	0.517 [13.13]	REFERENCE	in [mm]
H (INNER)	0.388 [9.86]	±0.008 [0.20]	in [mm]
OAH	0.668 [16.97]	±0.015 [0.38]	in [mm]
OD	1.217 [30.91]	±0.015 [0.38]	in [mm]
PART WEIGHT	4.10	± 0.60	g
THREAD DETAIL INFORMATION:	8 THREADS PER INCH	0.125" [3.17] PITCH	405° FULL DEPTH THREADS

DISCLAIMER

THIS INFORMATION IS PROVIDED AS A GENERAL GUIDE, INCLUDING DIMENSIONS. IT IS THE CUSTOMER'S RESPONSIBILITY TO SELECT THE PROPER CONTAINER FOR PRODUCT AND APPLICATION COMPATIBILITY.

DISTRIBUTED BY:



REF NO.:

DWG31916

DESCRIPTION:

24-400 PP Child Resistant Cap with SG90 Pulp Printed Liner

Safe-Gard™ Type A Technical Data Sheet

.020" Pulp SG-90

Revision: SG90-07262013

Product	.020" Pulp SG-90																	
Scope	Two piece white-lined pulp backed heat induction foil innerseal that will provide a tamper evident seal to PVC, PET, and some Borex containers.																	
Composition	<table border="1"> <thead> <tr> <th>Material</th> <th>Standard</th> <th>Metric</th> </tr> </thead> <tbody> <tr> <td>Pulp</td> <td>0.020"</td> <td>0.508mm</td> </tr> <tr> <td>Wax</td> <td>-</td> <td>-</td> </tr> <tr> <td>Foil</td> <td>0.001"</td> <td>0.025mm</td> </tr> <tr> <td>Heat Seal</td> <td>0.0005"</td> <td>0.013mm</td> </tr> </tbody> </table>	Material	Standard	Metric	Pulp	0.020"	0.508mm	Wax	-	-	Foil	0.001"	0.025mm	Heat Seal	0.0005"	0.013mm		
Material	Standard	Metric																
Pulp	0.020"	0.508mm																
Wax	-	-																
Foil	0.001"	0.025mm																
Heat Seal	0.0005"	0.013mm																
FDA Status: 21 CFR 175.300	Recommended Storage and Handling: Refer to website																	
Drug Master File (DMF): 3782	EU / EP Reg.:																	
GTR Oxygen: Essentially Zero	MVTR: Essentially Zero																	
Sealing to glass containers: Selig can not guarantee the performance or seal integrity of this materials when applied to any glass (treated or untreated) container. We suggest you contact your glass supplier for recommendations on glass treatments that may or may not improve performance or seal integrity.																		
Print Location (if any): On foil layer																		

Selig materials are compliant with limitation of heavy metals in packaging per CONEG & EU 94/62/EC, article 11.

MSDS's are not required as Selig is not a chemical manufacturer or distributor and our products are 'articles' intended for food packaging per 29 CFR 1910.1200 (HazCom).

Page 2 of 2

DISTRIBUTED BY:



REF NO.:

DWG31916

DESCRIPTION:

24-400 PP Child Resistant Cap with SG90 Pulp Printed Liner

DISCLAIMER

THIS INFORMATION IS PROVIDED AS A GENERAL GUIDE, INCLUDING DIMENSIONS. IT IS THE CUSTOMER'S RESPONSIBILITY TO SELECT THE PROPER CONTAINER FOR PRODUCT AND APPLICATION COMPATIBILITY.