


T-TWAV-WR-120

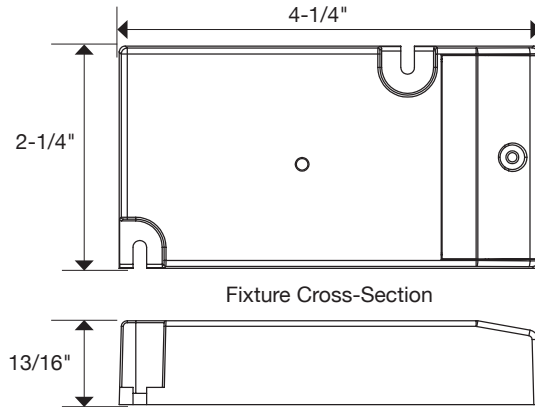

## WAV SMART RECEIVER

PART NUMBER	DESCRIPTION / OUTPUT	DIMENSIONS
T-TWAV-WR-120	WAV 120 watt smart LED receiver. Allows you to use a wireless controller, a smart phone app, or voice control with a smart home hub to control lights. Use with TandemLED smart controller (T-T-1Z-WC-RF-Color) for tunable white light control. Also compatible with the UNO 1-Zone LED controller (T-Q-1Z-WC-RF-Color), DUO 2-Zone LED controller (T-Q-2Z-WC-RF-Color), and the Quattro 4-Zone LED controller (T-Q-4Z-WC-RF-Color) for single color control.	4-1/4" x 2-1/4" x 13/16" 107.8 mm x 57 mm x 0.85 mm

## FEATURES

- Turns lighting into smart home compatible\*
- Compatible with single white lighting and tunable white lighting
- Female plug included for quick installation with plug-in power supply
- Dims on 12 volt side
- 3-year limited warranty
- Designed for indoor application
- Use with TandemLED Wireless Controller for wireless tunable white lighting control
- Use with Uno, Duo, or Quattro Wireless Controller for wireless lighting control

## COMPATIBLE POWER SUPPLIES

PART NUMBER	DESCRIPTION	DIMENSIONS
T-12W-12V-PI	12 watt AC/DC 2 prong plug-in, 12 volt DC 1 AMP.	2-15/16" x 1-3/16" x 1-13/16"
T-24W-12V-PI	24 watt AC/DC 2 prong plug-in, 12 volt DC 2 AMP.	3-11/16" x 1-7/8" x 1-5/16"
T-36W-12V-PI	36 watt AC/DC 2 prong plug-in, 12 volt DC 3 AMP	3-3/4" x 2" x 1-5/16"
T-60W-12V-PI	60 watt AC/DC 2 prong plug-in, 12 volt DC 5 AMP	5-1/8" x 2-1/16" x 1-1/4"
T-96W-12V-PI	96 watt AC/DC 3 prong plug-in, 12 volt DC 8 AMP.	5-1/2" x 2-3/8" x 1-3/8"
T-120W-12V-PI	120 watt AC/DC 3 prong plug-in, 12 volt DC 10 AMP	6-3/8" x 2-11/16" x 1-1/4"
T-60W-12-WP-HW	60 watt, 12 volt IP67 rated waterproof LED hardwired	6-1/2" x 1-5/8" x 1-1/4"
T-150W-12-WP-HW	150 watt, 12 volt IP67 rated waterproof LED hardwired.	7-3/8" x 2-3/8" x 1-1/2"

## INSTALLATION LOCATIONS

- Above Cabinet / Open Soffits
- Interior Wall Cabinet
- Base Cabinets
- Open Covers
- Any Available & Accessible Outlets

**DO NOT INSTALL IN AN ATTIC**

## TECHNICAL INFORMATION

Series	WAV Smart Control™ Series
Input Voltage	12/24 volt DC
Output Voltage	12 volt DC
Output Wattage	120 watts @ 12V DC; 240 watts @ 24V DC
Dimmable	By using wireless controller or smartphone app
IP Rating	20
Rating	cULus Recognized
Rated Life	30,000 hours
Mounting	Screw holes located on opposite corners of receiver
Wiring	20/2 stranded or 20/2 solid
Operating Temperature	-4°F to 122°F (-20°C to 50°C)
Environment	Dry location
Construction Material	PC plastic
Warranty	3 years

\*Compatible with Zigbee-enabled smart home hub products available from several manufacturers