



**TECHNICAL INFORMATION**



V3 Moderate Variation



Ready Ship



Recommend offset pattern  $\leq 33\%$




DCOF:  $\geq 0.42$



**COLORS**



White VTC SBWH

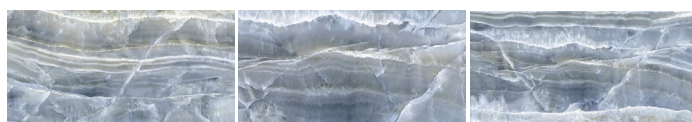

Green VTC SBGR (ONLY Available in 24" x 48" Polished)



Gray VTC SBGY

**Tiles, Mosaic and Trim\***

SIZE	ACTUAL	THICKNESS	FINISH
24" x 48" Rectified	23.56" x 47.31"	9mm	Matte & Polished
12" x 24" Rectified	11.75" x 23.56"	9mm	Matte & Polished
3" x 24" Bullnose	2.75" x 23.56"		Polished

\* Not all sizes are available in all colors and finishes

**Application\*\***

		WALL	FLOOR
Interior	Residential	•	•
Interior	Commercial	•	•
Interior	Heavy Commercial	•	
Exterior	Residential/Commercial	•	

\*\* These recommendations are not defined by ANSI Standards

**Performance Characteristics**

	MATTE	POLISHED
Breaking Strength	$\geq 425$ lbs	$\geq 425$ lbs
Chemical Resistance	Class E	Class E
DCOF	$\geq 0.42$	Not Applicable
Deep Scratch Resistance - Unglazed	Not Applicable	Not Applicable
Frost Resistance	Resistant	Resistant
Mohs Hardness - EN101	Not Applicable	Not Applicable
PEI Rating	Not Applicable	Not Applicable
Water Absorption	<0.5%	<0.5%
Certifications	Not Applicable	Not Applicable
Shade Variation Code	v3	v3



Please see [virginiatile.com](http://virginiatile.com) for details