STARK GLAZED PORCELAIN FLOOR & CERAMIC WALL TILE



floridatile

STARK


shown on front: B615.0044.003 24x24 Grey & B635.0164.003 14x39L Grey Structure (ceramic wall)

Stark by Florida Tile brings the luxury of understated elegance to everyday life. Evocative of natural stone in a most disciplined and exacting way, it has a modern, global appeal. Ideally fitted to a minimalist's aesthetic, Stark proposes uncomplicated yet impactful designs.

Keeping a simple color scheme of white and grey, Stark offers two rectified size formats: a 24x24 glazed porcelain floor and wall tile and a modern 14x39 ceramic wall tile that work in tandem to create powerful looks. A 14x39 structured wall tile in both colors features a repetitive, linear design that amplifies the collection's versatility. Rounding out this line are bullnose trims in both 3x24 and 3x14 sizes.

Stark glazed porcelain floor and ceramic wall tiles are appropriate for all standard residential and commercial wall and backsplash applications. The porcelain floor tile is appropriate for all standard residential and commercial countertop applications as well as most floor applications. It is GREENGUARD® and Porcelain Tile certified. It also contributes to USGBC LEED® points and the ANSI® approved NAHB® Green Building Points.

below: B615.0044.001 24x24 White & B635.0162.001 14x39 White (ceramic wall)

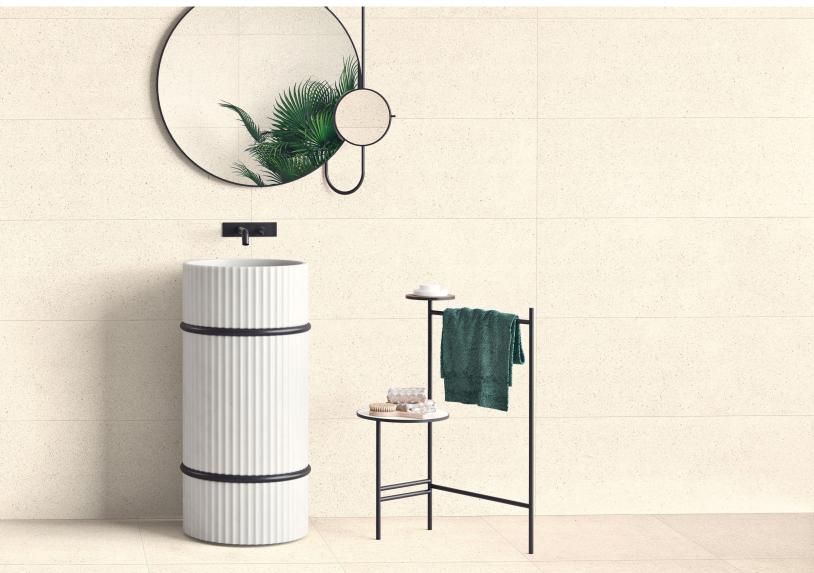

COLORS



B615.0044.001 24x24 White



B635.0162.001 14x39 White (ceramic wall)

B635.0164.001 14x39L White Structure (ceramic wall)



B615.0044.003 24x24 Grey



B635.0162.003 14x39 Grey (ceramic wall)



B635.0164.003 14x39L Grey Structure (ceramic wall)

STARK



¹ These tests are performed by a 3rd party testing lab using industry standard equipment and techniques. Values are offered in good faith as being accurate and typical of normal production. Due to the natural variation of raw materials and manufacturing processes, the values of the purchased product for any particular installation may vary.

² ANSI® A137.1 standard, ceramic tiles selected for level interior spaces expected to be walked upon when wet must have a minimum wet DCOF AcuTest® value of 0.42.

³ Average production value.

⁴ Please visit www.floridatile.com/intended-use for further details.

Typical Uses

Stark glazed porcelain floor and ceramic wall tiles are appropriate for all standard residential and commercial wall and backsplash applications.

The porcelain floor tile is appropriate for all standard residential and commercial countertop applications as well as most floor applications.

Notice: Not all flooring products are suitable for wet areas, specialized applications, or commercial use. Please refer to the American National Standard Specifications for Ceramic Tile (ANSI® A137.1) for ceramic, stone, and glass installation for specific usage and installation information.

This Florida Tile product will contribute to USGBC LEED® points and the ANSI® approved NAHB® Green Building Points.

Color reproductions in this printed piece may vary from actual tile colors. Final selection should be made from actual tile samples.

Color, texture, and finish variations may occur due to the nature of the product.

#10058LT 3/20

Field Tile Nominal Size (in) ¹	Metric (cm)	Pcs./Sq Ft ²	Thickness ³	Edge
24x24	60x60	.25	9mm	Rectified
14x39 (ceramic wall)	35x99	.26	10mm	Rectified
14x39L (ceramic wall)	35x99	.26	10mm	Rectified

¹These values may vary from lot to lot.

²These values are based on actual sizes including the grout joint.

 $^{\scriptscriptstyle 3}$ May not apply to textured surfaces or tiles with uneven back patterns such as mesh mounted mosaics.

Trim	Shape	Sku	Nominal Size (in) ¹	Metric (cm)
Bullnose		P43N9	3x24	7.5x60
Bullnose		S43E9	3x14	7.5x35

¹These values may vary from lot to lot.



24x24 only 24x24 only www.floridatile.com is a registered trademark in the U.S. of Florida Tile, Inc.® 2020