
John Richard

Assembly Instructions Item#AJC-9158

Thank you for purchasing this quality product. Be sure to check all packing materials carefully for small parts that may have come loose inside the carton during shipment. Carefully unpack and inspect each piece of your new chandelier. Do not discard any contents until after assembly is complete to avoid accidentally discarding small parts or hardware. To Prevent the Risk of Injury do not attempt to install this if any piece is missing or damaged. IMPORTANT: FOR A SAFE AND SECURE INSTALLATION, THESE FIXTURES MUST BE INSTALLED BY MEANS OF SUPPORTS THAT ARE INDEPENDENT OF THE OUTLET BOX. WARNING: BE SURE THE ELECTRICITY TO THE WIRES YOU ARE WORKING ON IS SHUT OFF; EITHER THE FUSE IS REMOVED OR THE CIRCUIT BREAKER IS SHUT OFF. This light fixture requires installation by a person familiar with the codes and restrictions in your area. We recommend installation by a licensed electrician. ***Caution: Please carefully read all instructions before starting the assembly process. For your safety, two people are required for proper assembly and installation. This fixture has been rated for up to Fifteen (15) 25-Watt maximum TYPE G9 bulbs (included).

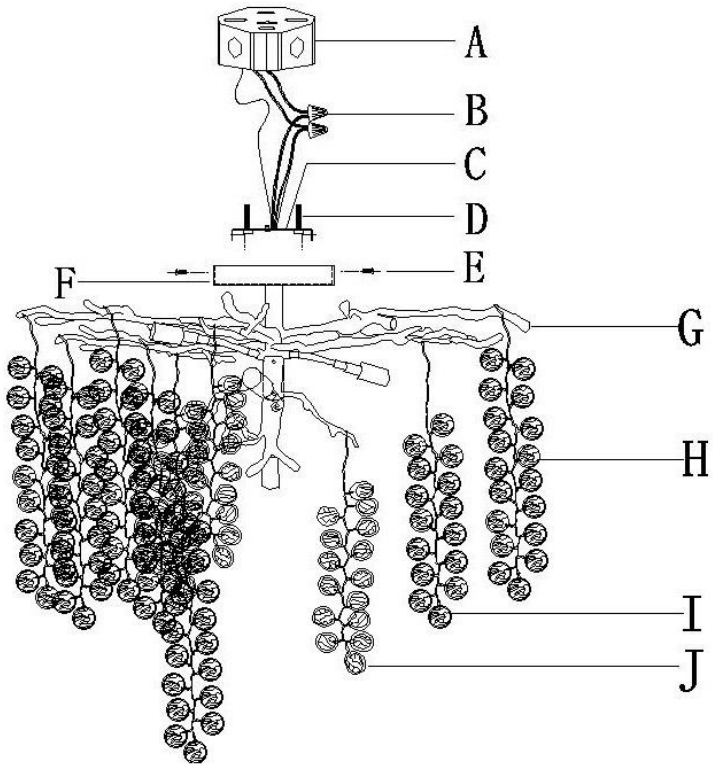

Assembly Step:

1. Attach the Cross Bar (C) to the Outlet box (A) using the Outlet box Screws (D).
2. Please connect the wires and then cover the tie-in with the Wire nut (B).
3. Please attach the pendant (F) underneath the ceiling with Screws (E) to the Cross bar (C) very tightly.
4. Assemble (G) to (F), using (H) to tighten.
5. Please hang glass droplet\strings (K, L, M) over the branches/body (J) as shown. (K) 30 PCS, (L) 60PCS, (M) 30PCS to body (J) as show.
6. Recommend bulb wattage: 25-watt max, 15 type G9 Bulbs.

NOTE: DO NOT EXCEED RECOMMEDNED WATTAGE

H: 30PCS(28 PCS Beads)
I: 60PCS(22 PCS Beads)
J: 30PCS(18 PCS Beads)