


PART#: 22/2 k5504

DESCRIPTION :

2C/22AWG STRANDED PVC JKT

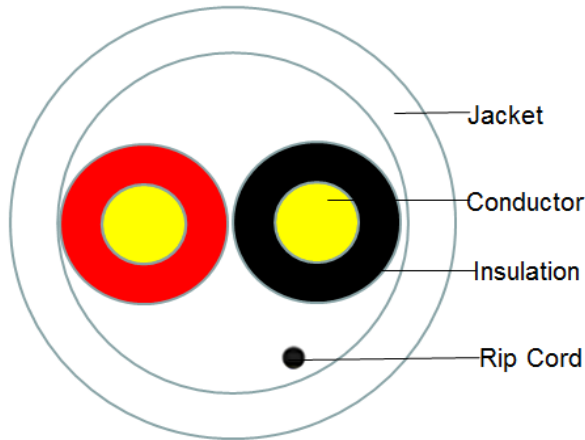

Standard: UL 444 & UL 13, Type (UL) CM c(UL)

EU RoHS 2011/65/EU Compliant

EN50575: 2014 REACTION TO FIRE CLASS Eca

Construction Characteristics:

Conductor	Material	Solid Bare Copper
	Size	22AWG X 2C
	Construction	1/0.64+/-0.004mm
Insulation	Material	PVC
	Min.Thickness	0.18mm
	AVG.Thickness	0.20mm
	Diameter	1.1+/-0.05mm
	Colors	Black & Red
Jacket	Material	PVC
	Min.Thickness	0.38mm
	AVG.Thickness	0.43mm
	Diameter	3.2+/-0.20mm
	Rip Cord	Nylon
	Color	White
Bend radius	Min 15D/55mm	

Electrical & Physical Characteristics:

Conductor Resistance(22AWG)	Max 53.5ohm/km at 20°C
Dielectric Strength	Min AC1.5KV
Rated Voltage	Max 80Volts
Marking:	
Packaging:	

Approx.Weight	Approx.Dimension(mm)	Package	Packages per pallet
7.17kgs/15.81lbs	280x260x280	1000ft/Box	64