

## Control interface unit

### IC-KP2-1HB17-2V1D



- LED status indicator of bus communication and read/write head
- Network loop through by means of integrated 2 port switch

IDENTControl Compact control interface with Ethernet interface for TCP/IP, PROFINET, EtherNet/IP, and MODBUS TCP protocols



## Function


The RFID identification system IDENTControl Compact from Pepperl+Fuchs offers a vast number of benefits compared to other systems, thanks to its innovative design. The control interfaces IDENTControl and IDENTControl Compact make up the core of the system.

With its integrated interfaces to all commercially available fieldbus systems such as PROFIBUS, PROFINET, Ethernet, EtherCAT, CC-Link, serial connections (RS 232 or RS 485) and numerous connection options for read/write heads available for frequency ranges LF, HF and UHF, the IDENTControl Compact control interface can be easily and flexibly adapted to your requirements.

LEDs on the front of the housing indicate bus communication, connected read/write heads and active read/write commands. Reliability of the application is further increased by using trigger sensors.

The system is equally suited for use in control cabinets and field use in IP67. The interface to the higher-level fieldbus is integrated in the housing, and all connections are designed such that they are pluggable. This enables simple installation and quick, problem-free replacement in case of device failure. The consistent EMC design, with metal housing, grounding and shielded wires, offers a high degree of reliability.

## Dimensions

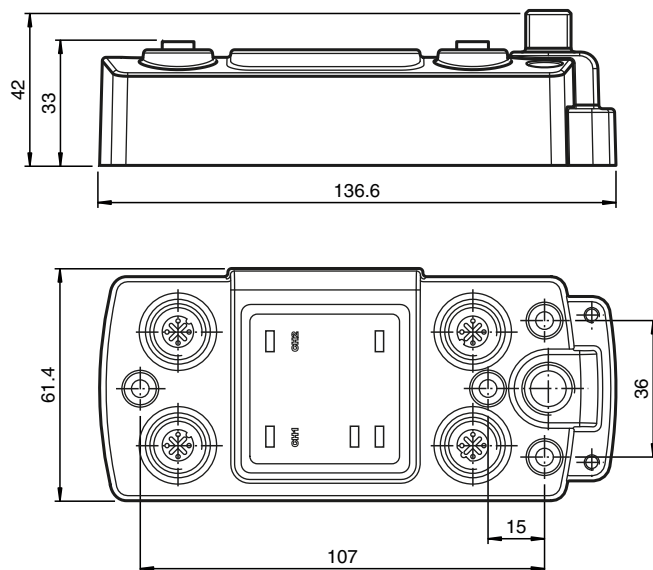

Release date: 2020-05-11 Date of issue: 2020-05-11 Filename: 200876\_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group  
www.pepperl-fuchs.com

USA: +1 330 486 0001  
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111  
fa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091  
fa-info@sg.pepperl-fuchs.com

 **PEPPERL+FUCHS**

## Technical Data

### General specifications

|                            |        |
|----------------------------|--------|
| Number of read/write heads | max. 1 |
| UL File Number             | E87056 |

### Functional safety related parameters

|                                |       |
|--------------------------------|-------|
| MTTF <sub>d</sub>              | 140 a |
| Mission Time (T <sub>M</sub> ) | 10 a  |
| Diagnostic Coverage (DC)       | 0 %   |

### Indicators/operating means

|                  |                                                                                                                                                         |
|------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------|
| LED Link/Traffic | green: network connection<br>yellow: flashes in rhythm with the transmitted data                                                                        |
| LED 1            | Status indicator for read/write head<br>green: command at read/write head active<br>yellow: approx. 1 second long, if command was successfully executed |
| LED CH1          | green: read head detected<br>red: Configuration error                                                                                                   |
| LED PWR/ERR      | green: power on<br>yellow: system is starting<br>red: PROFINET bus failure                                                                              |
| Rotary switch    | Address setting                                                                                                                                         |

### Electrical specifications

|                         |                |                                                                                        |
|-------------------------|----------------|----------------------------------------------------------------------------------------|
| Rated operating voltage | U <sub>e</sub> | 20 ... 30 V DC , PELV                                                                  |
| Ripple                  |                | ≤ 10 % at 30 V DC                                                                      |
| Current consumption     |                | ≤ 2 A incl. read/write head                                                            |
| Power consumption       | P <sub>0</sub> | 3.5 W Without read/write heads                                                         |
| Galvanic isolation      |                | basic insulation acc. to DIN EN 50178, rated insulation voltage of 50 V <sub>eff</sub> |

### Interface 1

|               |                                                                                 |
|---------------|---------------------------------------------------------------------------------|
| Physical      | Ethernet                                                                        |
| Protocol      | SMTP<br>HTTP<br>TCP/IP (Port 10000)<br>MODBUS/TCP<br>EtherNet/IP<br>PROFINET IO |
| Transfer rate | 10 MBit/s or 100 MBit/s                                                         |

### Interface 2

|               |                                                                                 |
|---------------|---------------------------------------------------------------------------------|
| Physical      | Ethernet                                                                        |
| Protocol      | SMTP<br>HTTP<br>TCP/IP (Port 10000)<br>MODBUS/TCP<br>EtherNet/IP<br>PROFINET IO |
| Transfer rate | 10 MBit/s or 100 MBit/s                                                         |

### Directive conformity

|                               |                              |
|-------------------------------|------------------------------|
| Electromagnetic compatibility |                              |
| Directive 2014/30/EU          | EN 61000-6-2<br>EN 61000-6-4 |
| RoHS                          |                              |
| Directive 2011/65/EU (RoHS)   | EN 50581                     |

### Standard conformity

|                      |           |
|----------------------|-----------|
| Degree of protection | IEC 60529 |
|----------------------|-----------|

### Ambient conditions

|                             |                                                                                                                          |
|-----------------------------|--------------------------------------------------------------------------------------------------------------------------|
| Ambient temperature         | -25 ... 70 °C (-13 ... 158 °F)                                                                                           |
| Storage temperature         | -40 ... 85 °C (-40 ... 185 °F)                                                                                           |
| Climatic conditions         | air humidity max. 96 %<br>Salt spray resistant to EN 60068-2-52                                                          |
| Shock and impact resistance | Oscillation (Sine): 5 g, 10 - 1000 Hz to EN 60068-2-6<br>Shock (Half-sine): 30 g, 11 ms in accordance with EN 60068-2-27 |


### Mechanical specifications

|                      |      |
|----------------------|------|
| Degree of protection | IP67 |
|----------------------|------|


Technical Data

|              |                                                                                                                                                         |
|--------------|---------------------------------------------------------------------------------------------------------------------------------------------------------|
| Connection   | Read/write heads: shielded, 4-pin, M12 connector<br>Power supply: M12 connector<br>Protective earth: M4 earthing screw<br>Ethernet: M12 plug connection |
| Material     |                                                                                                                                                         |
| Housing      | powder coated aluminum                                                                                                                                  |
| Installation | screw fixing                                                                                                                                            |
| Mass         | approx. 300 g                                                                                                                                           |

Connection

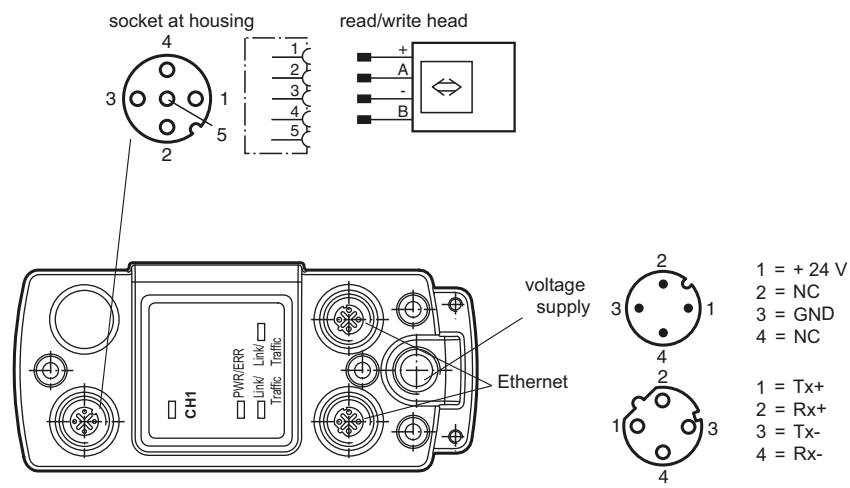

Assembly

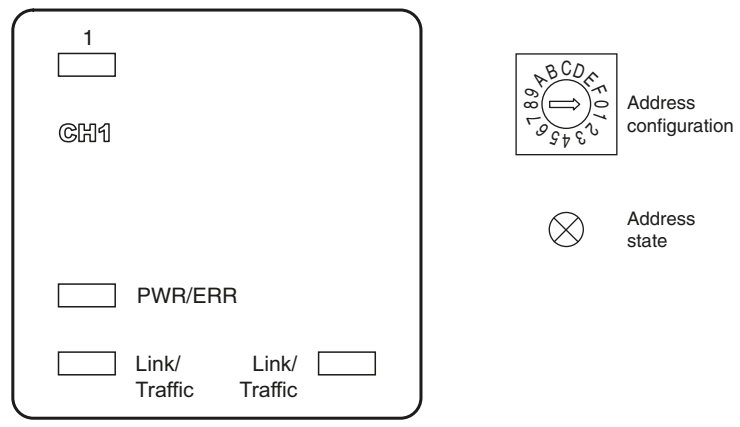

Accessories

|  |                              |                                                         |
|--|------------------------------|---------------------------------------------------------|
|  | <b>V1-G-2M-PUR-ABG-V1-W</b>  | Connecting cable, M12 to M12, PUR cable 4-pin, shielded |
|  | <b>V1-G-10M-PUR-ABG-V1-W</b> | Connecting cable, M12 to M12, PUR cable 4-pin, shielded |
|  | <b>ICZ-MH05-SACB-8</b>       | Mounting aid for DIN rail                               |

Release date: 2020-05-11 Date of issue: 2020-05-11 Filename: 200876\_eng.pdf

## Accessories

|                                                                                   |                                |                                                         |
|-----------------------------------------------------------------------------------|--------------------------------|---------------------------------------------------------|
|  | <b>V1SD-G-5M-PUR-ABG-V45-G</b> | Connection cable, M12 to RJ-45, PUR cable 4-pin, CAT5e  |
|  | <b>V1-G-5M-PUR-ABG-V1-W</b>    | Connecting cable, M12 to M12, PUR cable 4-pin, shielded |
|  | <b>V1-G-5M-PUR-ABG</b>         | Female cordset, M12, 4-pin, shielded, PUR cable         |