



# Z5738-U

TAG \_\_\_\_\_

## “The Small Pint®” 0.125-0.5 gpf, EcoVantage®, Ultra Low Consumption Urinal



### Z5738 Series

#### Recommended Trim:

- Z6003AV-EWS** AquaVantage®AV 0.5 gpf low consumption exposed urinal flush valve.
- Z6003AV-WS1** AquaVantage®AV 1.0 gpf low consumption exposed urinal flush valve.
- ZTR6203-ULF-LL**  
Sensor Long Life Battery Operated Urinal Flush Valve 0.125 gpf [0.5 Lpf].
- ZTR6203-QRT-LL**  
Sensor Long Life Battery Operated Urinal Flush Valve 0.25 gpf [1.0 Lpf].
- ZTR6203-EWS-LL**  
Sensor Long Life Battery Operated Urinal Flush Valve 0.5 gpf [1.9 Lpf].

**Note:** To ensure system performance:  
Minimum Running Water Pressure = 25 psi.

ZURN INDUSTRIES, LLC. ♦ COMMERCIAL BRASS OPERATION  
5900 ELWIN BUCHANAN DRIVE ♦ SANFORD NC 27330  
Phone: 1-800-997-3876 ♦ Fax: 919-775-3541  
www.zurn.com  
In Canada: ZURN INDUSTRIES LIMITED  
3544 Nashua Drive ♦ Mississauga, Ontario L4V1L2  
Phone: 905-405-8272 Fax: 905-405-1292

### Z5738 Urinal Series

- Zurn One Ultra Low Consumption Urinal designed for optimal performance between Zurn fixture and flush valve to save water while exceeding industry performance standards .
- 0.125-0.5 gpf [0.5-1.9Lpf]
- Vitreous china
- High efficiency washout flushing action
- Up to 88% water savings over standard 1.0 gpf [3.8 Lpf] system
- 3/4” top spud
- 2” I.P.S. outlet flange and rubber gasket with integral trap
- 14” extended rim for handicap compliance when installed at proper height.
- Assembled with vandal resistant outlet strainer
- Shipping Weight: 39 lbs

### Engineering Specification:

#### Recommended Trim:

#### Z5738-U

Vitreous china, 0.125-0.5 gpf [0.5-1.9Lpf], high efficiency, wall hung, integral trap, washout urinal complete with 3/4” top spud connection, concealed universal retrofit wall bracket, 2” outlet connection and vandal resistant outlet strainer.



Architectural/Engineering Approval

*These dimensions and specifications are subject to change without notice.*

*Fixture dimensions meet ANSI/ASME standard A112.19.2 and CAN/CSA B45 requirements.*

See Zurn One Systems for suggested packages.

The information contained in this document is subject to change without notice.  
Please contact Zurn for most up to date information.




# Z5738-U

TAG \_\_\_\_\_

## “The Small Pint®” 0.125-0.5 gpf, EcoVantage®, Ultra Low Consumption Urinal

Rough-in dimensions for Z5738-U Series

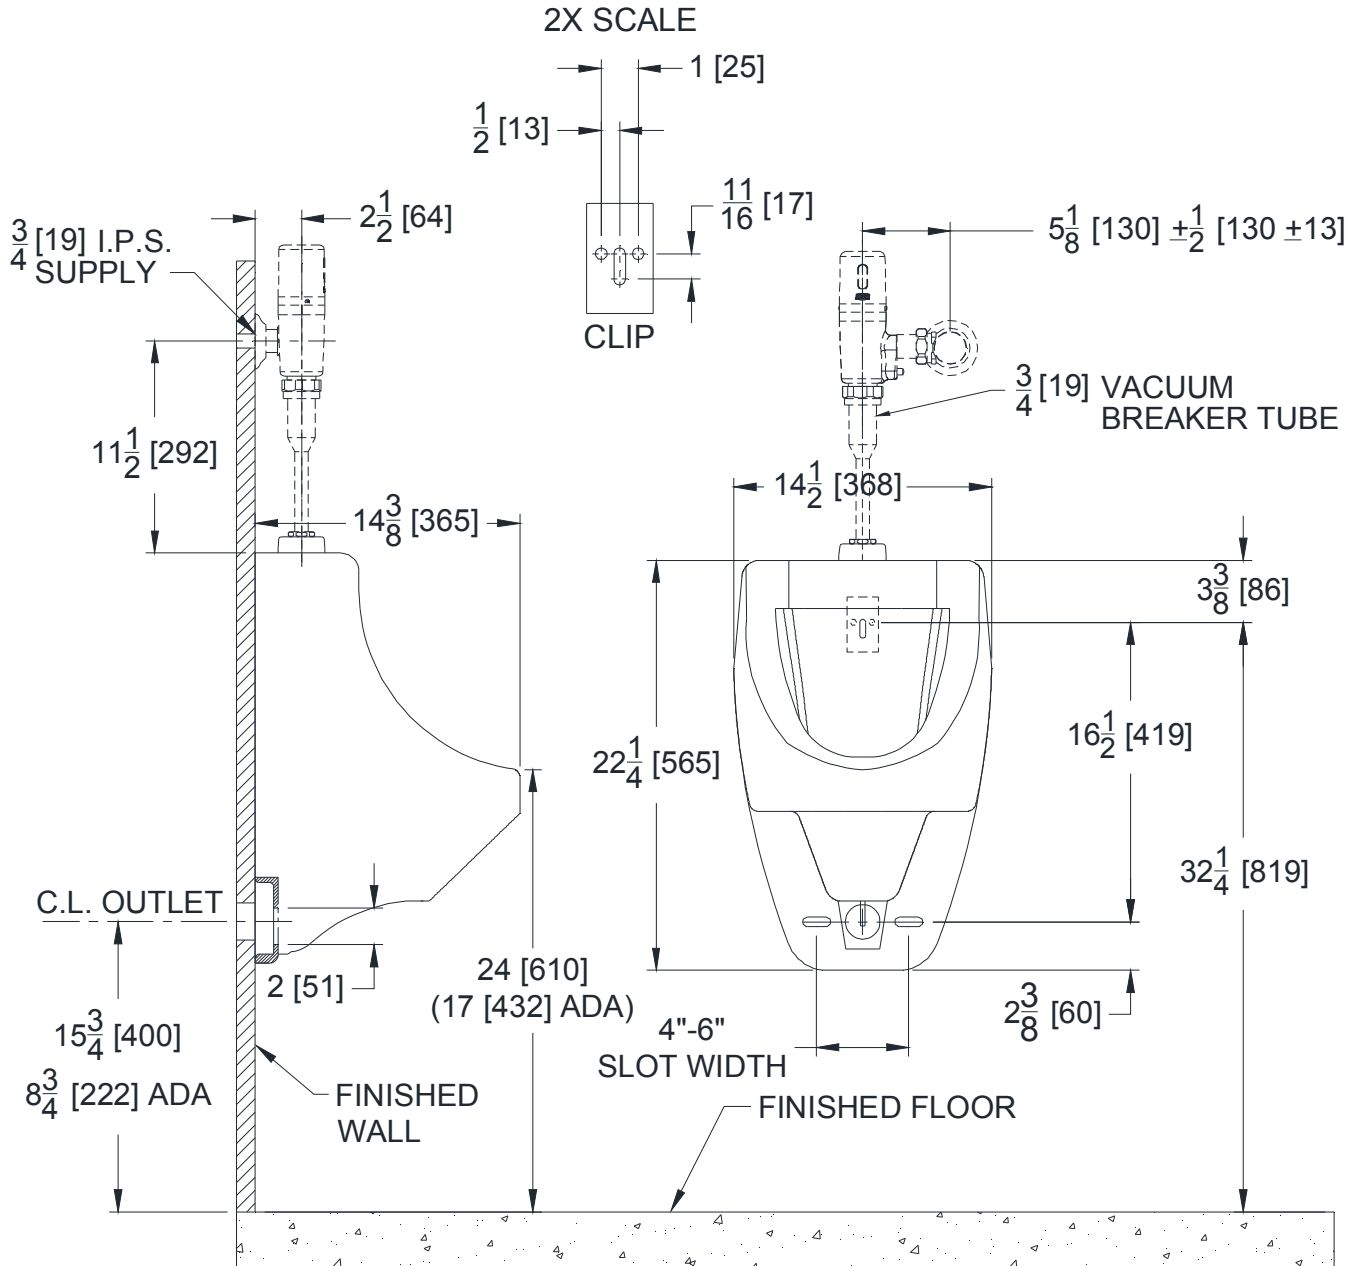

*These dimensions and specifications are subject to change without notice.*

*Fixture dimensions meet ANSI/ASME standard A112.19.2 and CAN/CSA B45 requirements.*

ZURN INDUSTRIES, LLC. ♦ COMMERCIAL BRASS OPERATION  
 5900 ELWIN BUCHANAN DRIVE ♦ SANFORD NC 27330  
 Phone: 1-800-997-3876 ♦ Fax: 919-775-3541  
 www.zurn.com  
 In Canada: ZURN INDUSTRIES LIMITED  
 3544 Nashua Drive ♦ Mississauga, Ontario L4V1L2  
 Phone: 905-405-8272 Fax: 905-405-1292

EcoVantage® is a registered trademark of Zurn Industries, LLC.