


Installation Instructions for Deadbolt


Step 1.

- Mark the Door as shown and use the template as guide.




Step 2.

- Drill the holes as shown.

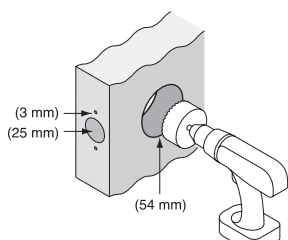


Step 3.

- Prepare rebate
- Install the latch and screw to tighten.



Step 4.



- Prepare rebate
- Install the strike and screw to tighten.



Step 5.

Install Thumbturn



- For Single Cylinder functions, please install the thumbturn as per diagram.

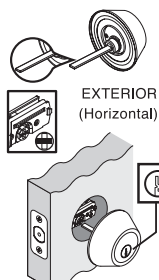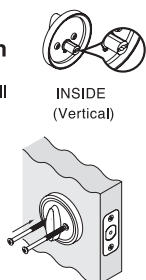

Step 6.

Install Cylinder


- For Double Cylinder functions, install the exterior and internal parts as shown in the diagram.

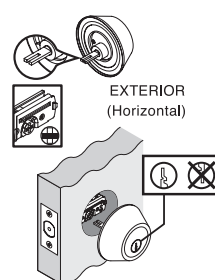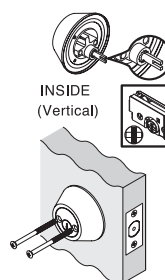

Step 7.

- Set the latch backset

Note: The latch is supplied set at 60mm (2-3/8"), to set the latch at 70mm (2-3/4").
Rotate the front end of the latch body and adjust the latch to 70mm (2-3/4").

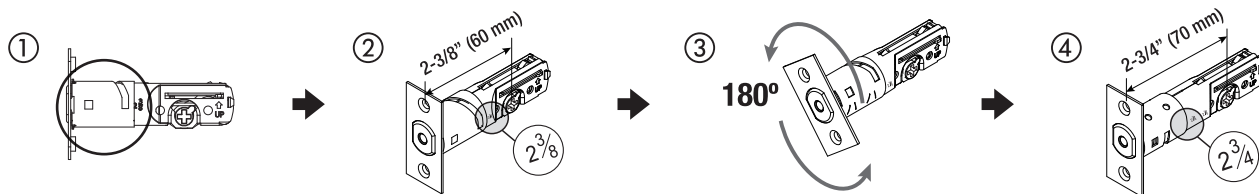

NOTE: Carefully follow these instructions when installing.
Screws to be tightened to a recommended 2.5Nm torque.



Mark centre-line
of latch hole

FOLD HERE

Fit here on door edge

54mm hole

BACKSET 60mm (2 3/8")

BACKSET 70mm (2 3/4")

Fit here on door edge

Installation template
for deadbolt



gainsboroughhardware.com.au
gainsboroughhardware.co.nz

