

DS-7732NI-I4 Embedded Plug and Play NVR



- 12 MP Recording Resolution
- 32 IP Camera Inputs @ 256 Mbps
- H.265+/H.265/H.264+/H.264/MPEG4
- 4K (3840 × 2160) HDMI Video Output
- Independent HDMI and VGA Outputs
- 4x SATA HDD, DVD-RW Option
- Smart Search and Smart Playback
- Alarm and Audio I/O

The DS-7732NI-I4 NVR provides high resolution, high video compression, and HDMI video output up to 4K. The DS-7732NI-I4 offers easy setup. The model includes smart search and smart playback to make locating specific incidents quick and accurate.

The dual-OS design ensures high system reliability, and Hikvision's proprietary ANR technology guarantees storage reliability when the network is disconnected.

The DS-7732NI-I4 supports live view, recording, and storage of up to 32 cameras simultaneously, with resolutions up to 12 MP. Customers will benefit from the centralized management of cameras and features such as information import/export, real-time information display, two-way audio, and VCA detection alarms.


Available Models:

DS-7732NI-I4

Specifications

DS-7732NI-I4	
Video/Audio Input	
Channels	32
Resolution	Up to 12 MP resolution
Two-Way Audio	1-ch, RCA (2.0 Vp-p, 1K Ω)
Network	
Video Compression	H.265+, H.265, H.264+, H.264, MPEG4
Incoming Bandwidth	256 Mbps
Outgoing Bandwidth	256 Mbps
Remote Connections	128
Video/Audio Output	
Recording Resolution	12 MP/8 MP/6 MP/5 MP/4 MP/3 MP/1080p/UXGA/ 720p/VGA/4CIF/DCIF/2CIF/CIF/QCIF
HDMI Output Resolution	4K (3840 × 2160), 1920 × 1080p, 1600 × 1200, 1280 × 1024, 1280 × 720, 1024 × 768
VGA Output Resolution	1920 × 1080p, 1280 × 1024, 1280 × 720, 1024 × 768
Audio Output	1-ch, RCA (linear 1K Ω)
Decoding	
Decoding Format	H.265+/H.265/H.264+/H.264/MPEG4
Live View/Playback Resolution	12 MP/8 MP/6 MP/5 MP/4 MP/3 MP/1080p/UXGA/720p/VGA/4CIF/DCIF/2CIF/CIF/QCIF
Synchronous Playback	16-ch
Audio Output	4-ch @ 4K or 16-ch @ 1080p
Hard Disk	
SATA	4 SATA interfaces for 4 HDDs
Capacity	Up to 12 TB capacity for each HDD (up to 48 TB)
External Interface	
Network Interface	2 × RJ-45 10/100/1000 Mbps self-adaptive Ethernet interfaces
Serial Interface	1 RS-485 (half-duplex), 1 RS-232
USB Interface	Front panel: 2 × USB 2.0; rear panel: 1 × USB 3.0
Alarm In/Out	16/4
General	
Power Supply	100 to 240 VAC
Power	≤300 W
Consumption (w/o Hard Disk)	≤20 W
Working Temperature	14° to 131° F (-10° to 55° C)
Working Humidity	10% to 90% (non-condensing)
Chassis	19-inch rack-mounted 1.5 U chassis
Dimensions (W × D × H)	17.5" × 15.3" × 2.8" (445 mm × 390 mm × 70 mm)
Weight (w/o Hard Disk)	<11 lbs (5 kg)

Rear Panel

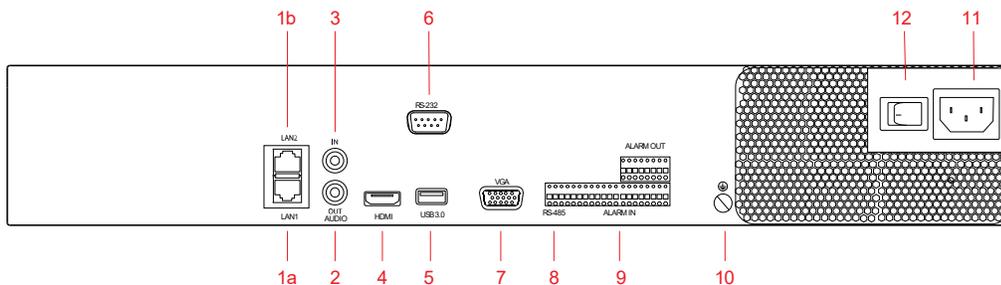

No.	DS-7732NI-I4
1a	LAN1 Network Interface
1b	LAN2 Network Interface
2	Audio Out
3	Audio In
4	HDMI Interface
5	USB 3.0 Interface
6	RS-232 Serial Interface
7	VGA Interface
8	RS-485 Serial Interface
9	Alarm In and Alarm Out
10	GND
11	100 to 240 VAC Power Input
12	Power Switch