








3605-H321-V-B-TRM, 3605BTRM

Shower System

Specification Submittal

Model Numbers	Feature Highlights
<ul style="list-style-type: none"> <input type="checkbox"/> 3605-H321-V-B-TRM Shower System Trim (modifiers include decimal points and hyphens) <input type="checkbox"/> 3605BTRM Shower System Trim (use when ordering L1-L7 and TC modification, do not use hyphens or decimal points) 	<ul style="list-style-type: none"> • Adjustable stop screw to limit handle rotation • 30" Slide bar • Two function diverter body sold separately • In-line vacuum breaker • 60" flexible metal hose • 1 Mode hand shower • 1 Mode showerhead and standard 2.0 Gpm (7.6 L/min) flow restrictor • Components made from metal and nonmetallic materials plated in standard polished chrome finish • Valves to be ordered separately
Modifications	
<ul style="list-style-type: none"> <input type="checkbox"/> -1.5  1.5 gpm (5.7 L/min) flow restrictor <input type="checkbox"/> Delete Suffix B Chrome plastic escutcheon on valve with color graphics/indicators in place of standard brass escutcheon <input type="checkbox"/> SH4 Square, 1 mode showerhead <input type="checkbox"/> TC Test Cap Trim (includes TA-10&T-12A) used with 16 series Temptrol Valve <input type="checkbox"/> L1 Less showerhead <input type="checkbox"/> L2 Less hand shower (wand only) <input type="checkbox"/> L3 Less showerhead and hand shower (head and wand only) <input type="checkbox"/> L4 Less head, arm, and flange <input type="checkbox"/> L5 Less hand shower system <input type="checkbox"/> L7 Less handle <input type="checkbox"/> -BBZ Brushed Bronze finish <input type="checkbox"/> -MB Matte Black finish <input type="checkbox"/> -STN Satin Nickel finish 	Warranty <p>Limited Lifetime - to the original end purchaser in consumer/residential installations. 10 Years - for commercial/industrial installations. Refer to www.symmons.com/warranty for complete warranty information.</p>  Compliance <ul style="list-style-type: none"> -ASME A112.18.1/CSA B125.1 -WaterSense 1.5 gpm (5.7 L/min) 2.0 gpm (7.6 L/min) -Lever handle meets ADA requirements   

SKU Builder


Series	Finish	Shower head	Modi-fier	Flow Rate	Trim (required)	Test Cap	Final SKU
3605-H321-V-B	STN			1.5	TRM		3605-H321-V-B-STN-1.5-TRM
3605B	MB	SH4	L3	15	TRM	TC	3605BMBSH4L315TRMTC

Note: No more than two modifiers (L1-L7) and modifier order will follow numerical order.

Architectural/Engineering Specification


Symmons Duro Shower and Hand Shower System _____ Includes Tub and Shower and Hand Shower System powered by the Temptrol® Pressure Balancing valve. Features adjustable stop screw to limit handle rotation, 30" slide bar, in-line vacuum breaker, 60" flexible metal hose, 1 mode hand shower, 1 mode showerhead and standard 2.0 gpm (7.6 L/min) flow restrictor. Components made from metal and nonmetallic materials plated in standard polished chrome finish. 10 Year Commercial Warranty. ASME A112.18.1/CSA B125.1 and WaterSense compliant. Available options: "1.5 - 1.5 gpm (5.7 L/min) flow restrictor", "Delete Suffix B - Chrome plastic escutcheon", "L1 - Less showerhead", "L2 - Less hand shower (wand only)", "L3 - Less showerhead and hand shower (head and wand only)", "L4 - Less head, arm, and flange", "L5 - Less hand shower system", "L7 - Less handle", "BBZ - Brushed Bronze finish", "MB - Matte Black finish", "STN - Satin Nickel finish", "TC - Test Cap Trim".

Dimensions

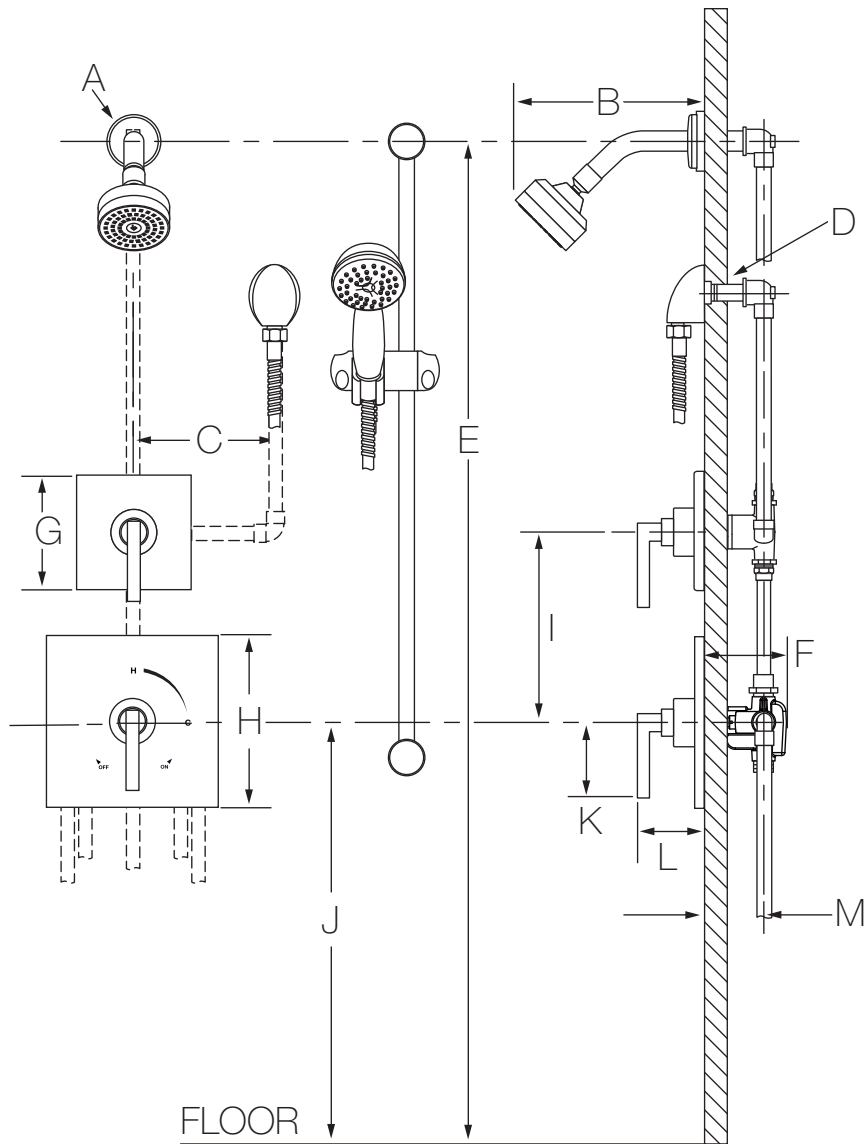

Measurements	
A	Ø 2-1/2", 64 mm
B	6", 152 mm
C	6", 152 mm
D	Male 1/2-14 NPT thread must be recessed 1/4" (6 mm) from finished wall
E	Ref. 77", 1956 mm
F	3-1/2", 89 mm
G	Sq. 5", 127 mm
H	Sq. 7-1/2", 191 mm
I	Ref. 10", 254 mm
J	Ref. 42", 1067 mm
K	3-1/8", 79 mm
L	3-1/2", 89 mm
M	Rough-in 2-3/8" ± 1/2", 60 mm ± 13 mm
N	6-3/4", 171 mm
O	6-3/4", 171 mm
P	5-5/8", 143 mm
Q	3-1/8", 79 mm
R	3-5/8", 92 mm
S	3-1/8", 79 mm
T	3-5/8", 92 mm

-SH4



Notes:

- 1) All dimensions measured from nominal rough-in (see M as reference).
- 2) Dimensions are subject to change without notice.