
ITEM: SP-AZ021

ANZZI PURE SHOWER PANEL

INSTALLATION & OPERATION MANUAL

V2.3

08/24/2026

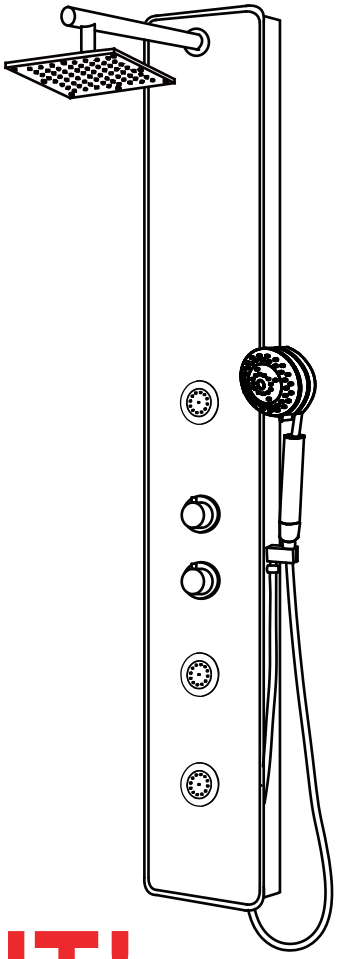

DON'T WAIT!
REGISTER NOW!

Register your product within 90 days to ensure your purchase is recognized and eligible for warranty coverage.

Register online at https://anzzi.com/pages/register or scan the QR code on PG. 2.

ANZZI®

PRODUCT REGISTRATION*

IMPORTANT: Warranty will not be recognized unless product is registered.

Register online at https://anzzi.com/pages/register or Scan the QR code below.
Registering your product maximizes your warranty benefits and ensures prompt service and support.

1


USE YOUR PHONE CAMERA TO SCAN THE QR CODE

2

FILL IN A QUICK REGISTRATION FORM


3


CLICK SUBMIT AND ENJOY PEACE OF MIND

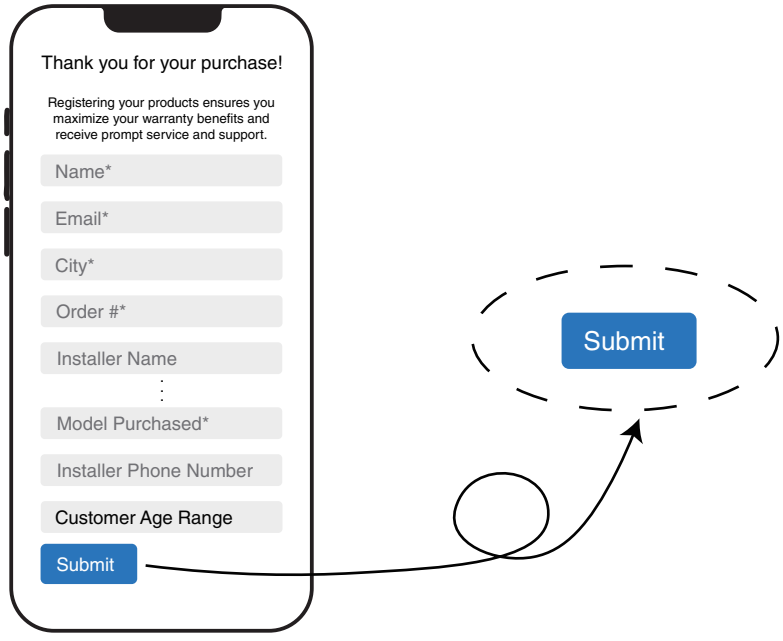

Need help? For technical support call **305-363-4679** or visit us at **www.ANZZI.com**

PARTS LIST

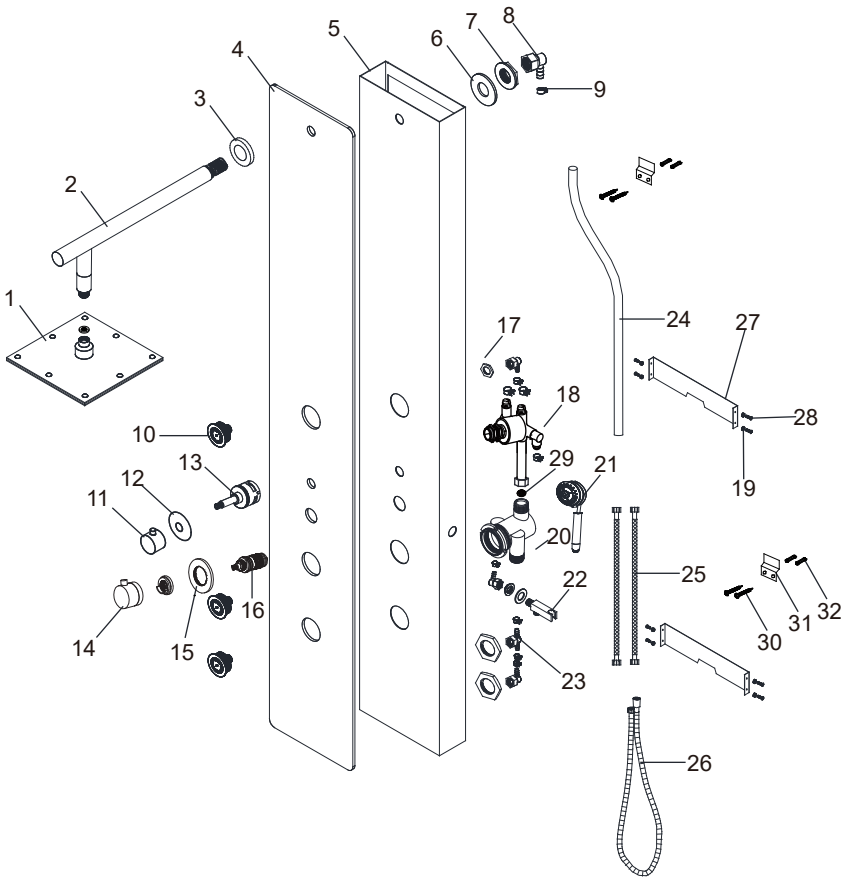

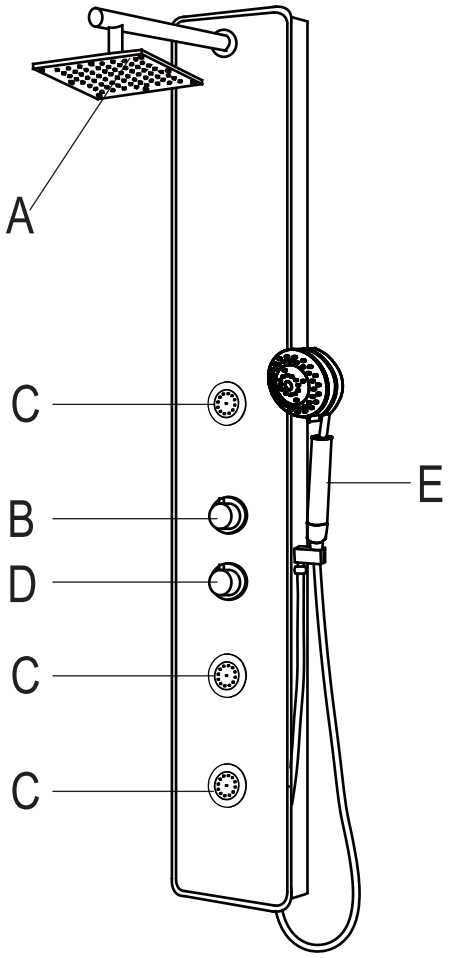


Component no.	Component	Material
1	head shower	s/s
2	arm bar	brass
3	flange	brass
4	front body	glass
5	backside body	PVC
6	washer 1	rubber
7	arm bar nut	brass
8	one way joint	ABS
9	clip	s/s
10	body jets	brass
11	knob	zinc
12	knob plate cover	brass
13	cartridge	various
14	handle	zinc
15	handle plate cover	brass
16	thermostatic cartridge	various
17	nut 2	brass
18	faucet body 1	brass
19	nut	s/s
20	faucet body 2	brass
21	hand shower	ABS
22	hand shower holder	ABS
23	two way joint	ABS
24	pvc hose	PVC
25	braided hose	s/s
26	flexible hose	s/s
27	hang bar	s/s
28	screw 1	s/s
29	flow restricter	various
30	screw 2	s/s
31	bracket	s/s
32	plug	ABS


A. Shower Head
B. Diverter w/ shut-off
C. Body Jets
D. Thermostatic control
E. Hand Shower

IAPMO IGC 154
ASME A112.18.1/CSA B125.1


BEFORE YOU START


Recommended Items



Screwdriver


Channel Locks


Goggles



Rubber hammer



Tape


Adjustable Wrench


Teflon tape


Allen key


Pencil


Electric drill

Read Before Using Your New Shower Panel

Congratulations on purchasing our Shower Panel. Your new shower panel will be a great addition to your bathroom for years to come. Our luxury Shower Panel brings a spa experience into your life in the comfort of your personal bathroom. Adding the shower panel as a modification to your present shower will allow you to enjoy the pleasures of massaging body spray jets. Furthermore. The shower panel will operate with your existing plumbing supply lines with standard line pressure and flow rates. Before using our Shower Panel, please read this document carefully and thoroughly.

The instructions and safety information in this document are essential to the safe operation of your new unit. Additionally, neglect or improper or incorrectly performed installation, maintenance or repair, including failure to follow the applicable care and cleaning instructions may affect your new product's warranty.

IMPORTANT.

1. Prior to installation. please make sure your package is intact. Look over the product and contact your dealer or ANZZI if you find damaged sections.
2. In order to install this shower panel, simple understanding of plumbing techniques will be necessary. Please contact your dealer or a professional plumber if you are unfamiliar with plumbing techniques or have questions.
3. This shower panel is designed for indoor use only. It is not intended for outdoor or other uses.
4. The product is provided with flexible supply hoses. It would be better putting stop valves between the hoses and water supplies.
5. Product could function between 20-125 supply pressure. Using pressure reducing valve while the pressure is too high.
6. For the product using thermostatic valve, the pressure difference between cold/hot supply shall not more than 30%. Otherwise, the product may not function.
7. For the product using thermostatic valve, the highest temperature is 49°C to avoid scald.
8. Check all connections for leaks.Retighten if necessary, but do not overtighten.


Mounting the Brackets of the Shower Panel

-It is recommended that the shower panel be mounted at a height that will make the unit accessible to people with varying heights. Establish the percise height and position of the unit on the wall. We recommend to leave a 12.68"(32cm) space between the shower head and the average height of the people in the house as well as a minimum distance of 1"(2.5cm) from the ceiling.(Figure A)

-Adjust the plumbing to ensure that there is adequate space for the shower panel to be installed.(Figure B)

-The height you choose shall allow the shower panel to completely cover up the connection points for the cold and hot water supplies. In order to determine your installation location of the shower panel, you should use a tape measure and a pencil.

(or some type of marking tool).

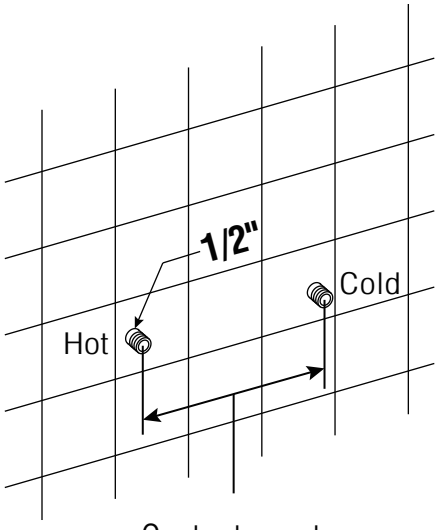

Center to center
Max 5 1/2"(14cm)

Figure B



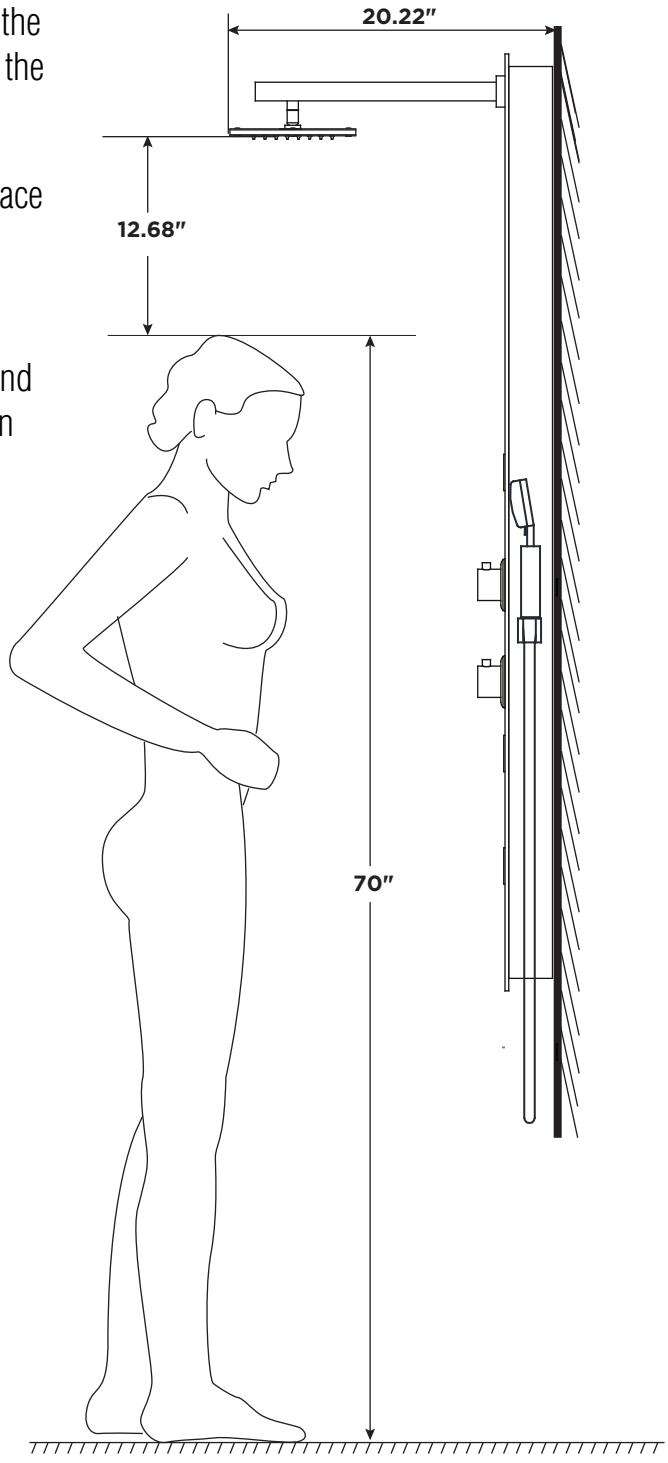


Figure A


20.22"
2.99"
59.05"
8.66"

STEP 1

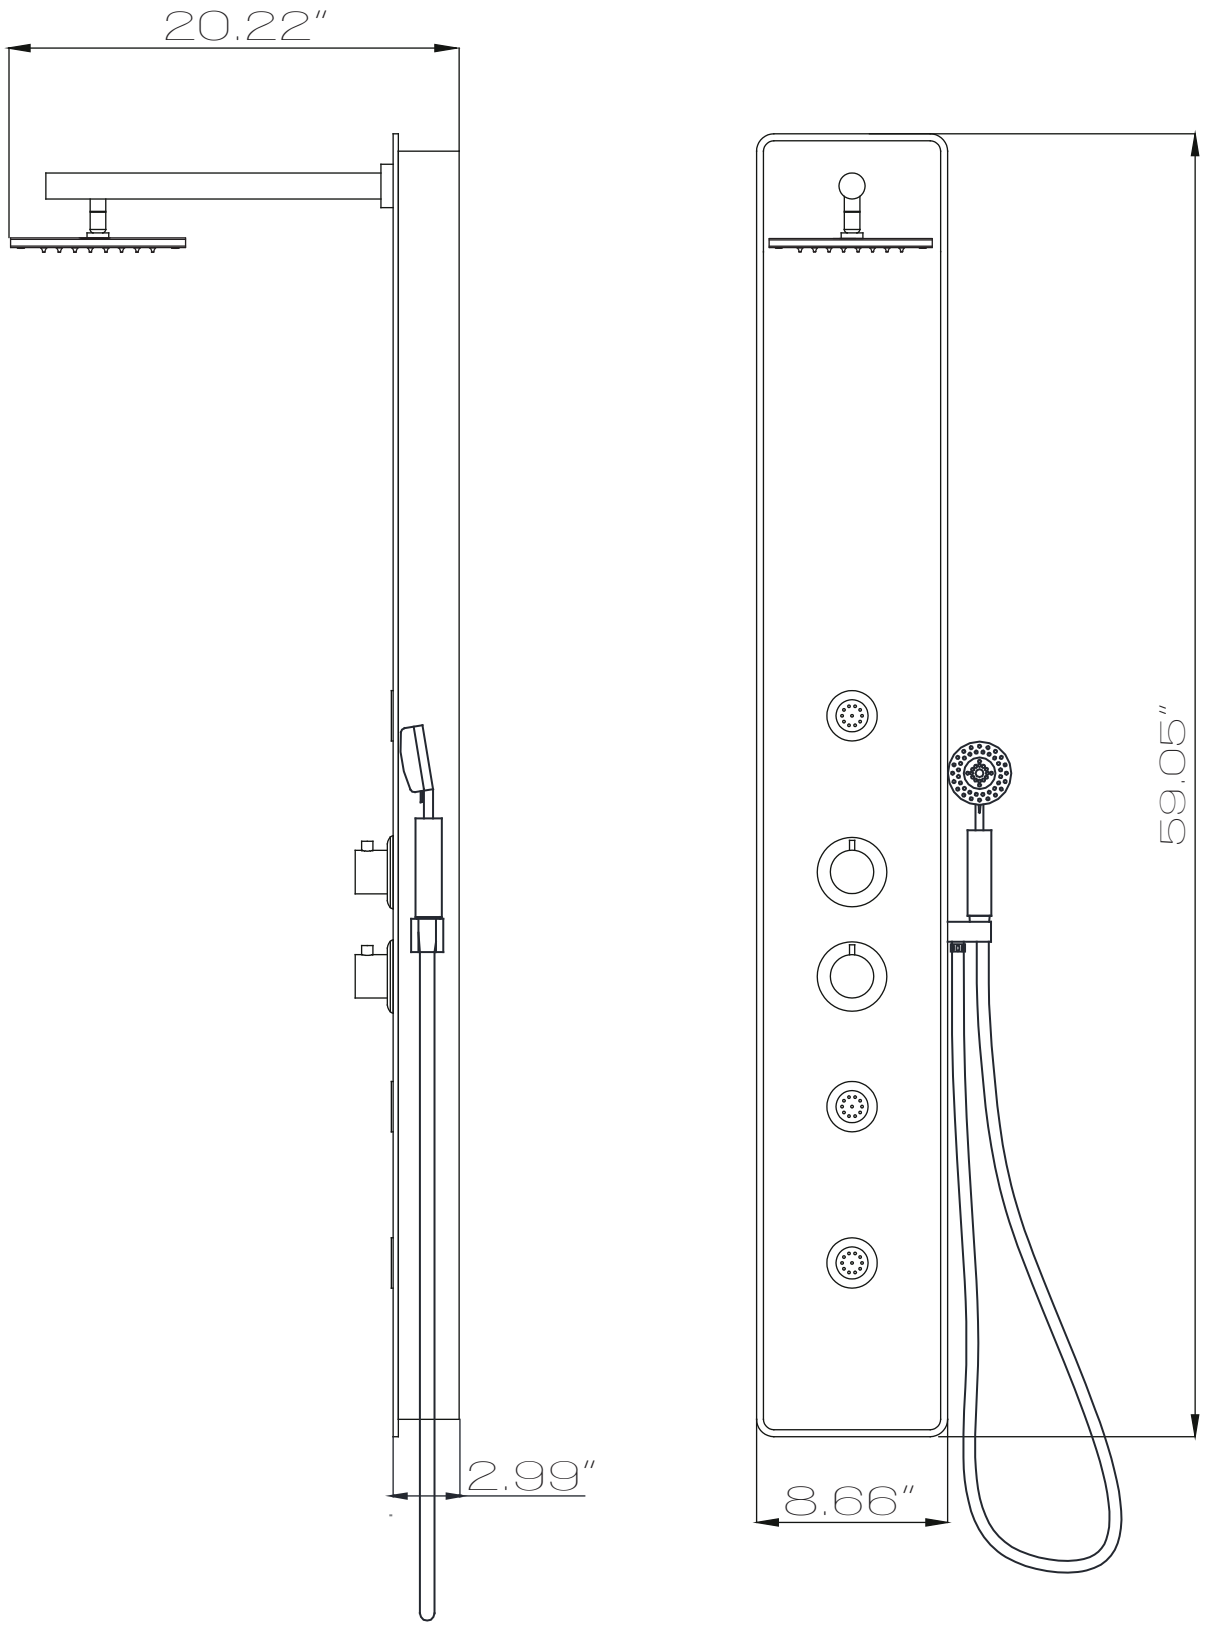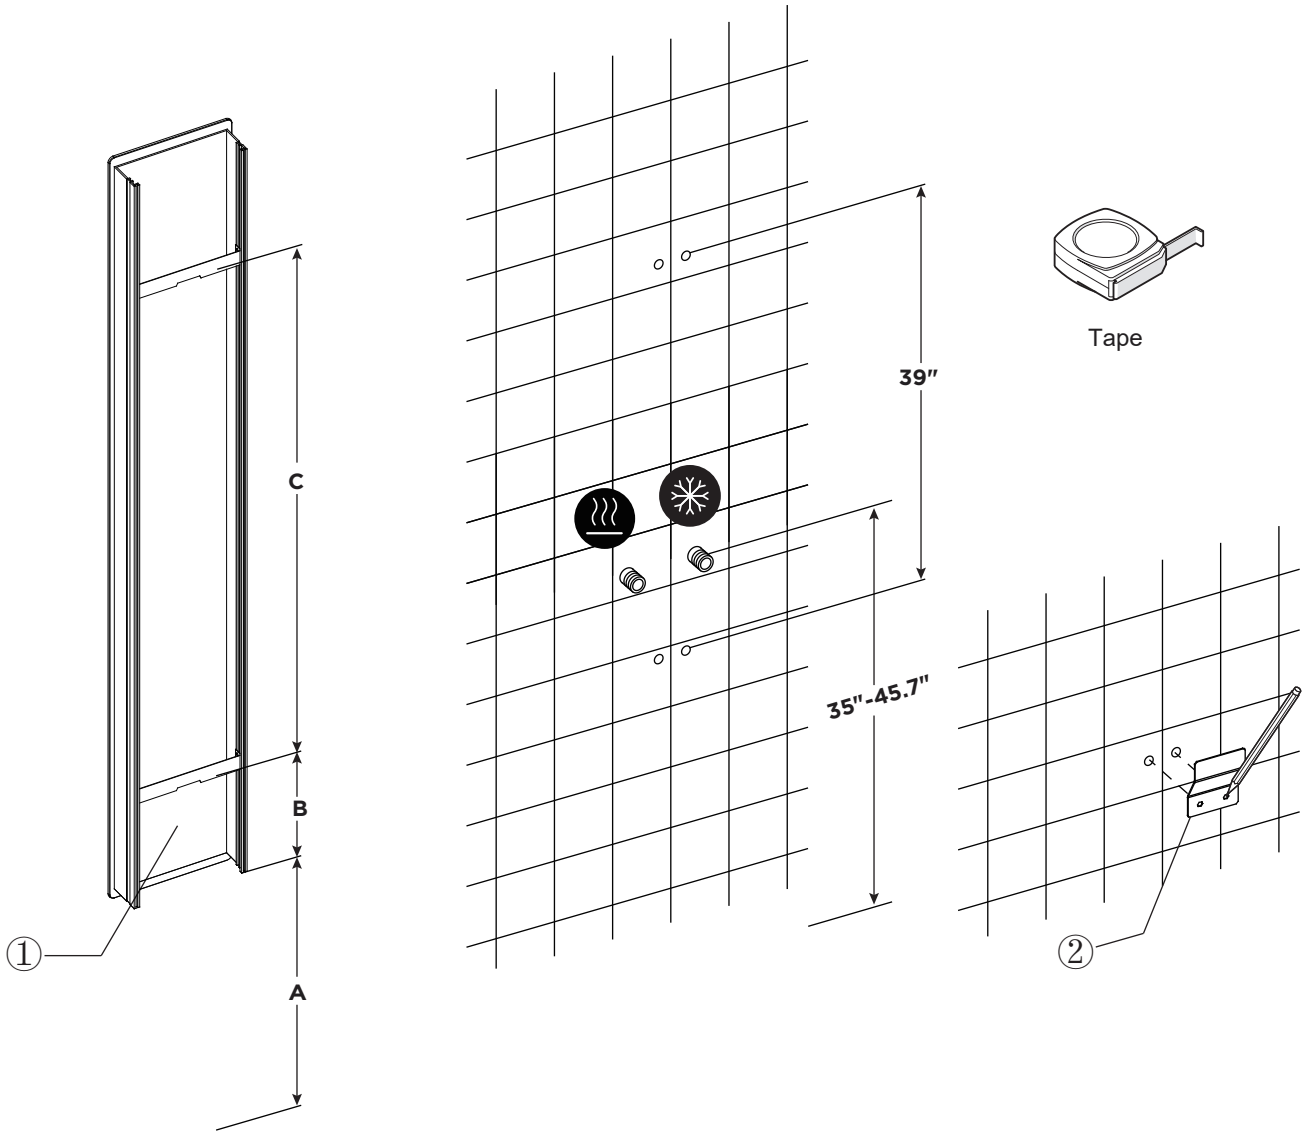

1-1 Measure the distance **A** between the floor and the bottom of the shower column.
Measure the distance **B** between the bottom of the shower column and the back bracket.
Measure the distance **C** between the brackets at the back of the shower column body (1)

1-2 Project this measurement onto the wall in order to install the mounting brackets (2)

1-3 Mark the postion of each screw holes of both mounting brackets(2) on the wall using a pencil.

1-4 The recommended height of hot and cold water is 35-45.7 inches.

STEP 2

Figure A

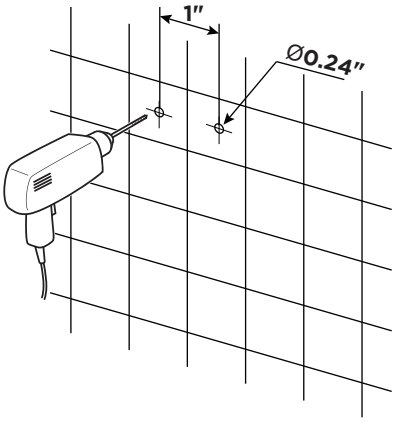


Figure B


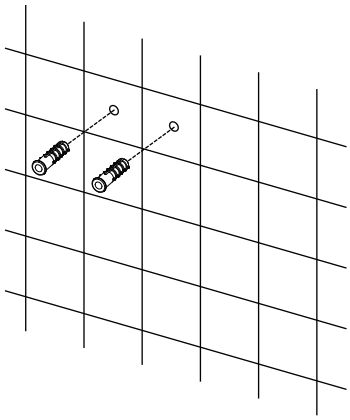


Figure C

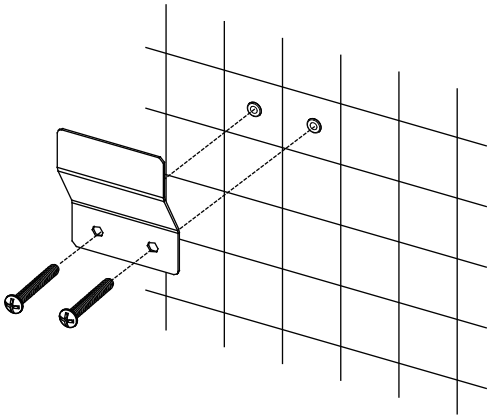

IMPORTANT Before drilling any holes for the shower panel brackets, be sure there are no hidden cables or pipelines aligned with the desired drilling position.

2-1 Drill the two holes for the top bracket 1" apart at the desired height.


2-2 Drill the two holes for the bottom bracket 1" apart below the top bracket.

2-3 Insert the wall anchors into the pre-drilled holes as shown in Figure B.

2-4 Place the shower panel brackets aligned with the drilled holes and secure the brackets by tightening the screws.

STEP 3

INSTALLATION (SHOWER HEAD)

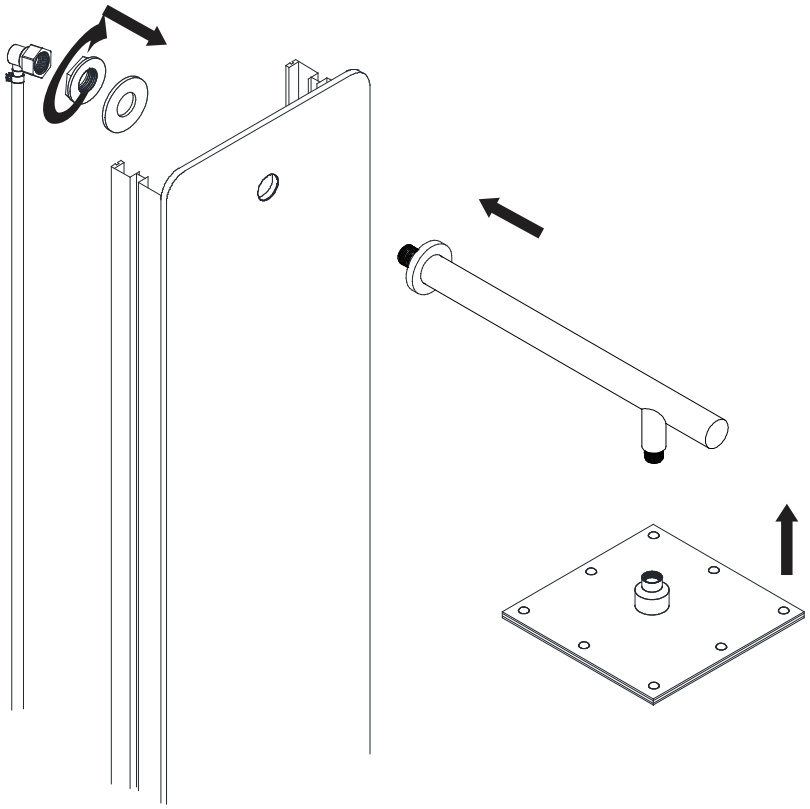


3-1 Install the shower arm to the shower panel with outlet pointing downward, tighten with washer and nut.

3-2 Install the shower head onto the shower arm.

STEP 4

INSTALLATION (HANDSHOWER)

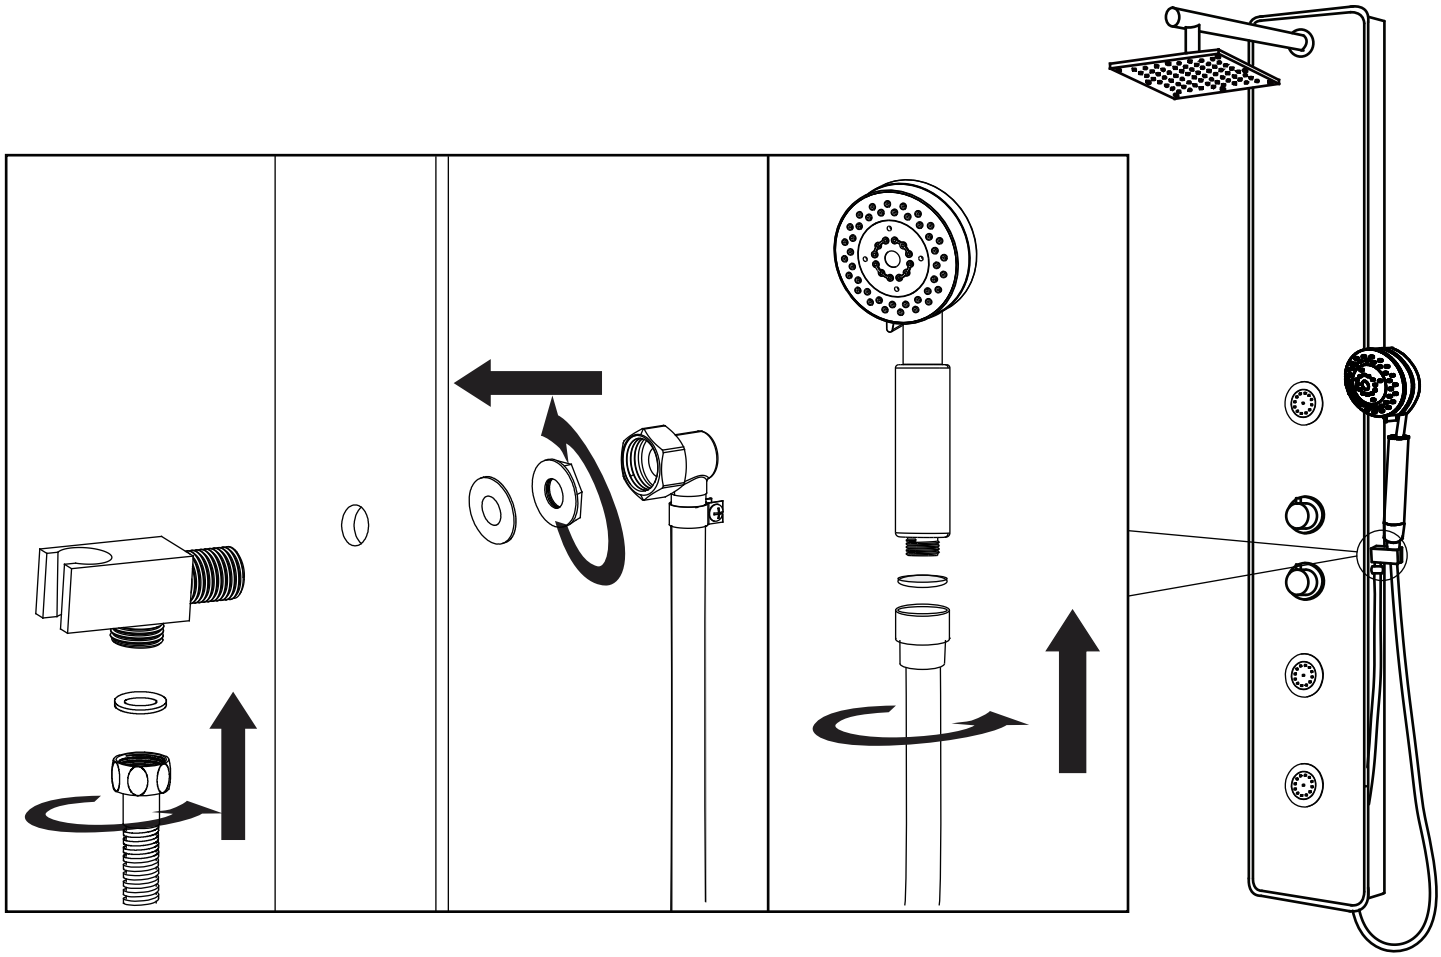

4-1 Insert the shower holder through the pre-drilled hole on the shower panel.

4-2 Connect the water supply hose to the shower holder,as shown.
Make sure all washers are inserted to prevent leakage.

4-3 Once the shower panel is fully installed and hung on the bracket, you can install the hand shower hose to the holder connection.

4-4 Connecting the hand shower to the hose, as shown.


STEP 5

IMPORTANT: Before connecting the inlet hoses and water supplies, turn on cold and hot water supplies and flush water lines for one minute. **This flushes away any debris that could cause damage to internal parts.**

1




2

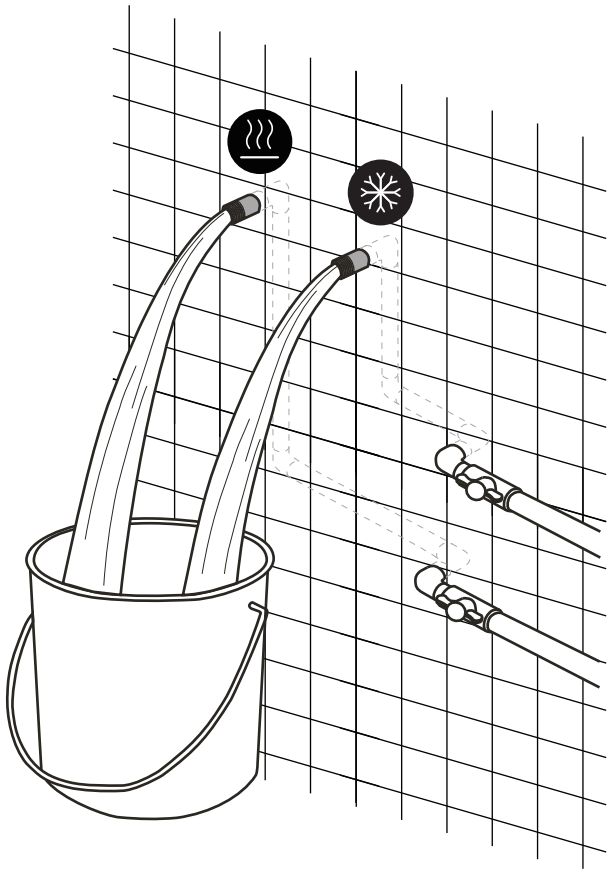

3



STEP 6

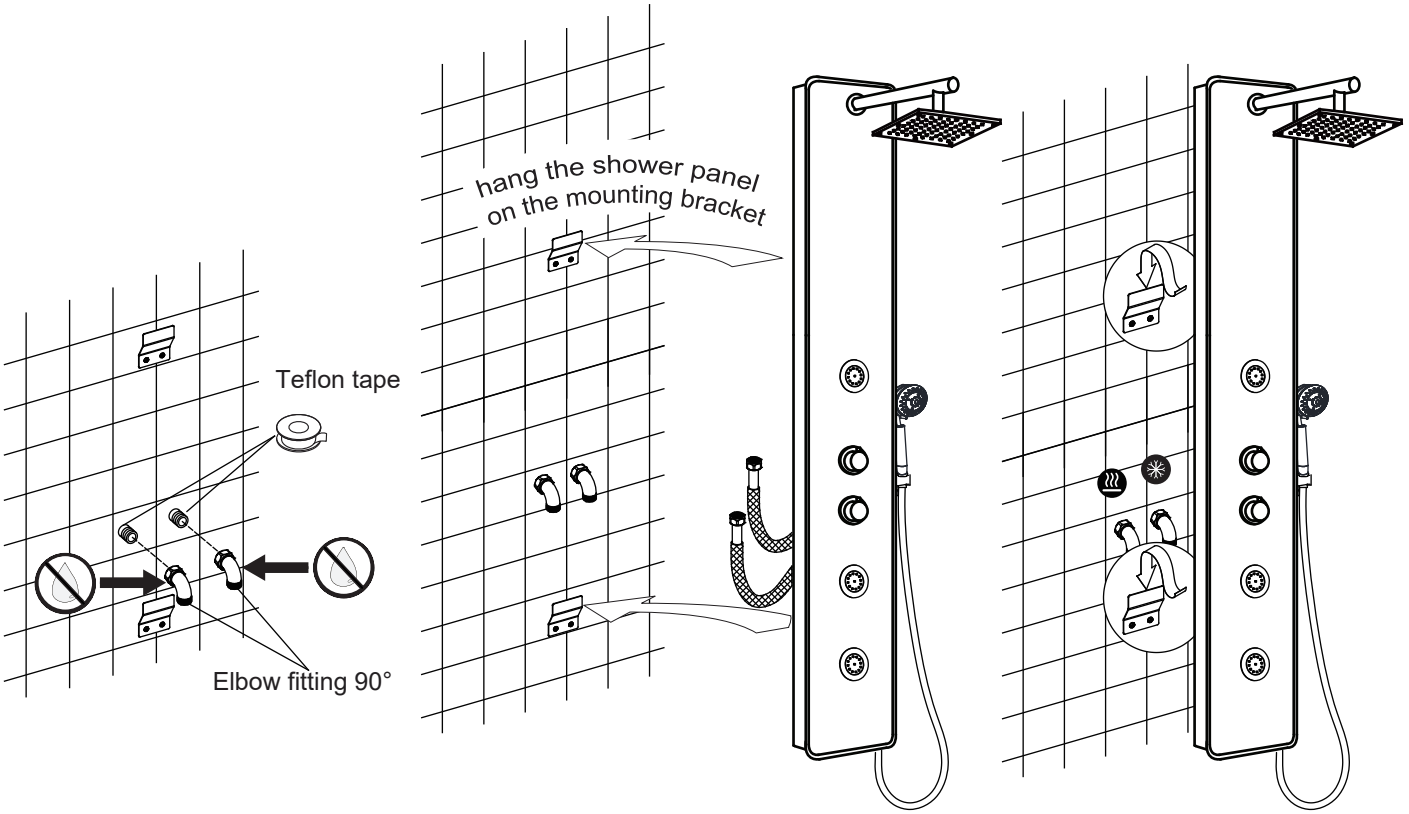

6-1 We strongy recommed instaling 90° short elbow fitings (not included) on both water outlets to avoid interferences with the plumbing components inside the shower column body.


6-2 Screw the cold and hot water hoese from the shower panel to the supply lines in the wall. Make sure the water supply hoses are connected to the corresponding shut off valves-i.e.cold water hose to the cold water supply and hot water hose to the hot water supply.The mixing valve will not function properly if the connections are incorrect.
Before hanging the shower panel onto the wall, turn on shut-off valves and test all water functions of the shower panel and check all connections for leaks.

6-3 Make sure that the hoses are in the shower panel enclosure.


6-4 Slide the shower panel down until it rests on the mounting brackets you installed. The shower panel must be seated onto the mounting brackets by pulling down the shower panel.

Note: Check all connections at arrows for leaks. Retighten if necessary, but do not overtighten.

CARE AND MAINTENANCE

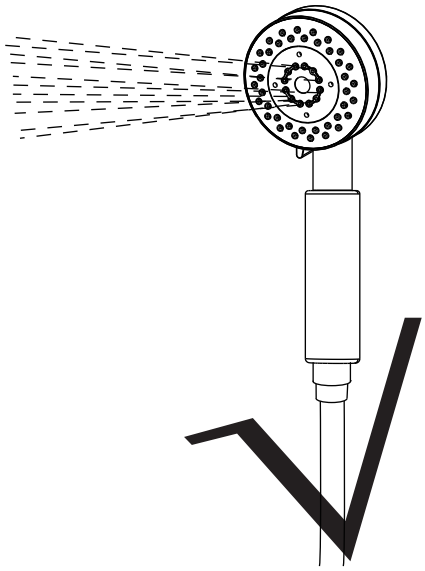


The water flow is normal

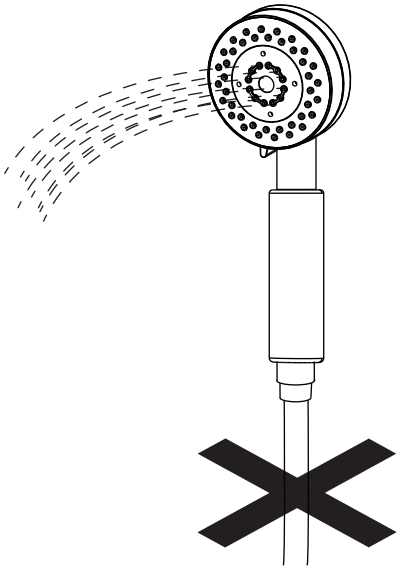


The water flow becomes smaller

1

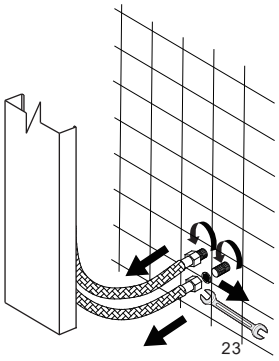


Remove the hot and cold water pipes and take out the filter screen.

2

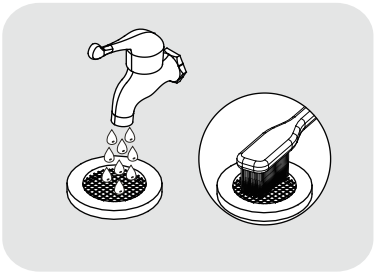

Clean the filter screen.

3

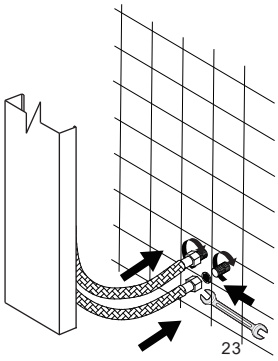


Install the filter and connect the hot and cold water pipes.

Note: If the water flow becomes smaller, please clean the filter screen at the inlet hoses. If the problem cannot be solved after cleaning, remove the thermostatic cartridge for cleaning by following the steps in page 11 to 12.

CARE AND MAINTENANCE


IMPORTANT:
It is not recommended that the user disassemble the thermostatic cartridge by himself, and it is recommended to ask professional personnel for treatment.

1




Take of the blue plug.

2




Loose the screw with the hexagon wrench.

3




Take off the thermostatic valve handle.
Note: The rod of cartridge can only be rotated when the handle is right in place. Don't rotate the rod of cartridge during and after removing the handle.

4




Loosen the thermostatic flange.

5




Take of thermo restrictor with the plier.
Note: We suggest recording the position of thermo restrictor by camera.

6




Loose the screw with the hexagon wrench.

7



Unplug the thermostatic cartridge.


8

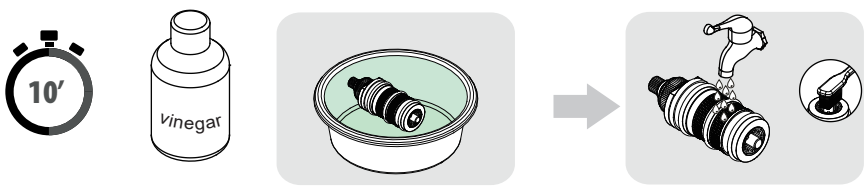

Soak the thermostatic cartridge in vinegar for 10 minutes
Rinse the cartridge with clean flowing water.


CARE AND MAINTENANCE

1




Put the cartridge back into.
Note: Beware the side hole of the cartridge is pointing downside and aligning with the side hole of body.

2




Screw the cartridge.

3




Screw the thermostatic flange back.
Note: Make sure the top surface of the flange is level with the top surface of the body.

4

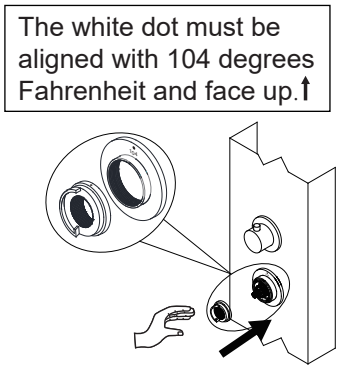


Put the thermo restrictor on.

5




Install the handle onto the cartridge with the button pointing upward.

6



Screw the handle to finish the installation.

7



Put the plug on.

CARE AND MAINTENANCE

ANZZI® products are crafted with superior quality standards and workmanship and engineered to stand the test of time. However, that does not mean the product can be neglected and will need some care and cleaning.

It is recommended to use regular soap and hot water along with a non-abrasive cloth or sponge to regularly clean the product. This avoids any nasty build up or deposits which would be tougher to remove.

If you feel the use of stronger cleaning solutions or chemicals is necessary always test the cleaning solution or chemical on an inconspicuous area before applying to the entire surface.

Wipe all surfaces clean and rinse completely with water immediately after applying cleaner. Rinse and dry any overspray that lands on nearby surfaces.

DO NOT ALLOW THE CLEANER TO SOAK.

Following these simple principles will ensure you ANZZI® product will remain as lustrous and stunning as the day it was first received. ENJOY!

Sincerely,

La Familia ANZZI®




ANZZI®