
WOLVERINE BRASS, INC.
FINALE PULL-OUT-SPRAY KITCHEN FAUCETS

85035 - CHROME
85035O4 - BRUSH NICKEL
85035O5 - OIL RUB BRONZE

FAUCET CONSTRUCTION:
- ☐ 35mm CERAMIC DISC WITH HOT LIMIT ADJ. RING.
- ☐ BRASS BODY WITH COPPER SUPPLIES.
- ☐ BRASS SUPPLY CONNECTION ADAPTERS WITH 1/2" IPS THREADS.
- ☐ ZAMAC #3 CHROME PLATED METAL HANDLE.


OPERATION:
- ☐ SINGLE CONTROL LEVER HANDLE.
- ☐ REQUIRES LESS THAN 5 LB FORCE TO OPERATE VALVE.
- ☐ TEMP. ADJUSTMENT 90° FROM FULL HOT TO FULL COLD.
- ☐ 1.8 GPM (6.8 L/min) AERATOR.

SINGLE HOLE MOUNT



STANDARDS:
- ☐ IAPMO/UPC CERTIFIED:
  - — ASME A112.18.1-2012/CSA B125.1-12
  - — NSF/ANSI 61-2012
  - — NSF/ANSI 372-2011 (LEAD FREE)
  - ADA COMPLIANT

THREE HOLE MOUNT

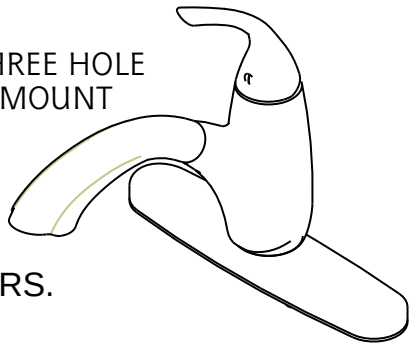

MOUNTING SURFACE REQUIREMENTS:
- ☐ SURFACE THICKNESS 1-3/4" MAXIMUM.
- ☐ THREE (1-3/8" MIN TO 1-5/8" MAX DIA.) HOLES 4" ON CENTERS.

