




FRONT VIEW

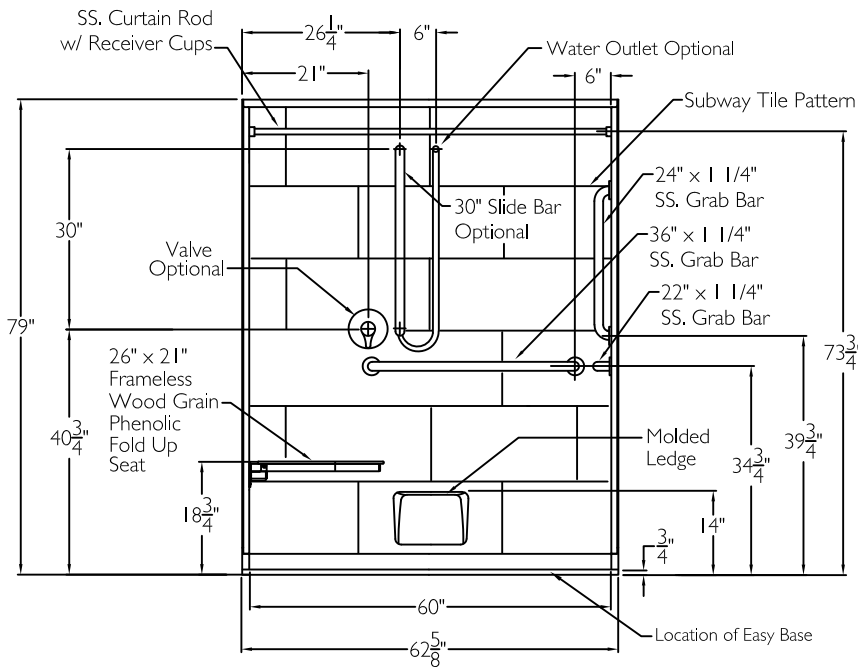


SIDE VIEW

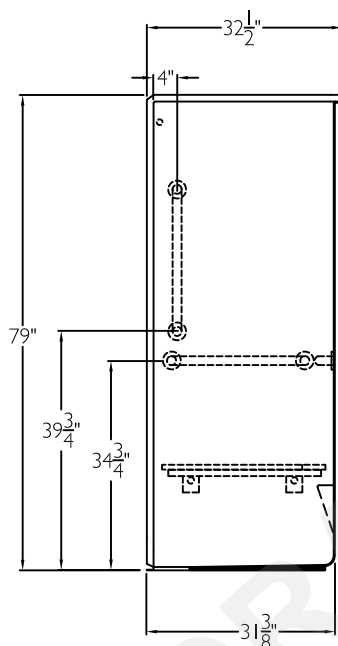

TOP VIEW

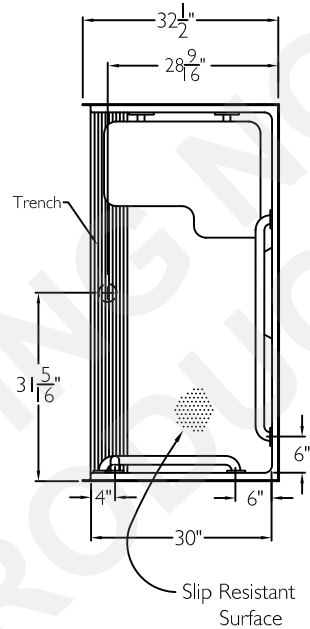

CROSS SECTION OF THRESHOLD

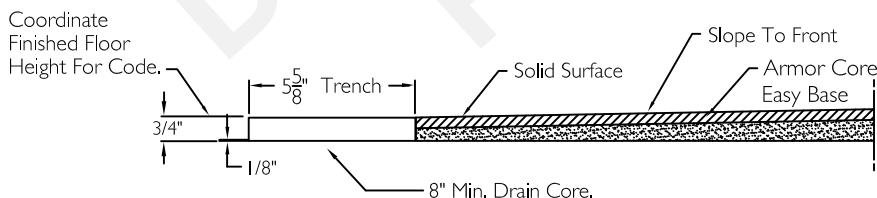

SPECIFICATION SHEET

This shower enclosure shall be model SST 6232 TR .75 IP left, or right. Finished surface shall be of a sanitary grade solid surface exhibiting a minimal thickness of 55 dry mils. The base shall be attached to the sump in such manner to form an integral part with an inner and outer coating of polyester resin. Unit construction shall be of a molded reinforced fiberglass with a 15% minimum fiberglass content.

The unit shall have outside dimensions of 62 5/8" x 32 1/2" x 79". The unit shall meet CSA B45.5-11, ANSI Z124.1.2, HUD-UM73, ADA, and ICC-ANSI A117.1-17.

HANDED BY THE SEAT

The enclosure shall be equipped with the following accessories:
1) One 36" x 1 1/4" diameter stainless steel horizontal grab bar on the back wall, 2) One 22" x 1 1/4" diameter stainless steel horizontal grab bar on the side wall opposite the seat, 3) One 24" x 1 1/4" diameter stainless steel vertical grab bar on the side wall opposite the seat, all with 1 1/2" statute clearance, mounted with stainless steel bolts, and secured from the rear with 3" x 3" x 11 gauge metal mounting plates, 4) 26" x 21" frameless wood grain phenolic fold up seat, 5) One inch diameter, 18 gauge stainless steel curtain rod with receiver cups, 6) Molded ledge low on the back wall, 7) Subway tile pattern, 8) Integral front trench drain, 9) Factory installed Armor Core Easy Base, 10) 3/4" Threshold.

THIS UNIT FEATURES THE OUTSIDE DIMENSION OF 62 5/8" OF OVERALL WIDTH. THIS DOES NOT ALLOW FOR FULL ENCLOSURE OF THE BOLTS AND NUTS USED TO SECURE THE BARS AND SEAT IN PLACE. THE BOLT AND NUT COMBINATION SHOULD NOT PROTRUDE MORE THAN 3/4" ON EITHER SIDE OF THE SHOWER WALLS. THIS MAY REQUIRE THE NEED TO NOTCH STUDS TO ALLOW BOLT CLEARANCE FOR A DRYWALL ENCLOSED FIRE WALL INSTALLATION. ADJUSTMENT OF THE WALL BOARD MAY BE NECESSARY TO PROVIDE CLEARANCE OF THE BOLT(S) WHILE MAINTAINING THE INTEGRITY OF THE DRYWALL ENCLOSED FIRE WALL ENCLOSURE.

NOTE: THIS UNIT WILL NOT ACCEPT A DOOR.

Job Name	Approved By Print Name	Date	COMFORT DESIGNS	
Project No	Approved By Signature		Model No. SST 6232 TR .75 L-Bar-I	
Comfort Designs 435 Industrial Road Savannah, TN 38372 tel 800.443.7269 fax 731.925.4290 www.comfortdesignsbathware.com	Architect		Drawing No. SST 6232 TR .75 HBW HSW VSW WGPH CR Easy Base	
	Engineer		Date Issued. 8-17-12	Drawing Rev. 7-6-20
	Rep		Material. Solid Surface	
	Wholesaler		Color.	
	Comments		Dimensions are in inches. Due to the nature of the materials dimensions may vary ± 1/2"	