

BACALL UPHOLSTERED QUEEN PLATFORM BED


ASSEMBLY INSTRUCTIONS



BOX#1

A. HEADBOARD

1 PC

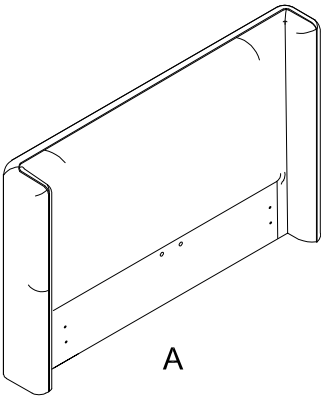

A

BOX#2

B. FOOTBOARD


1 PC

C. SLAT ROLL


1 SET

D. CENTER SLAT SUPPORT CLEAT

2 PCS



B

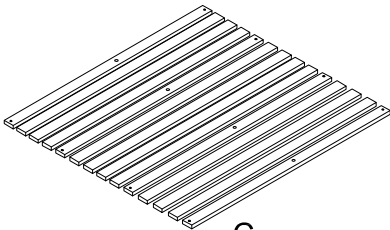

C



D

BOX#3

E. SIDE RAIL


2 PCS

F. CENTER SLAT SUPPORT


1 PC

G. SUPPORT LEG

4 PCS



E



F





G

HARDWARE KIT PACKED IN BOX #2

No.	Description	Image	Quantity
1	THREADED BOLT (5/16"x 3-1/2")		8 PCS
2	ALLEN BOLT (5/16"x 2-1/2")		4 PCS
3	ALLEN BOLT (1/4"x 1-1/4")		4 PCS
4	FLAT WASHER (5/16")		12 PCS
5	FLAT WASHER (1/4")		4 PCS
6	LOCK WASHER (5/16")		12 PCS
7	LOCK WASHER (1/4")		4 PCS
8	HEX NUT (5/16")		8 PCS
9	PHILLIPS SCREW (M4 x 32mm)		10 PCS
10	ALLEN KEY (5/16")		1 PC
11	WRENCH		1 PC
12	CONNECTING BRACKET		4 PCS

FULLY ASSEMBLED

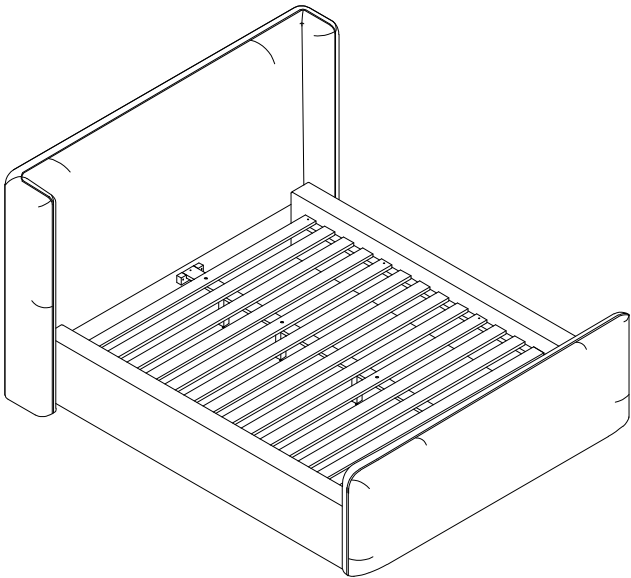


BACALL UPHOLSTERED QUEEN PLATFORM BED


ASSEMBLY INSTRUCTIONS




STEP 1:

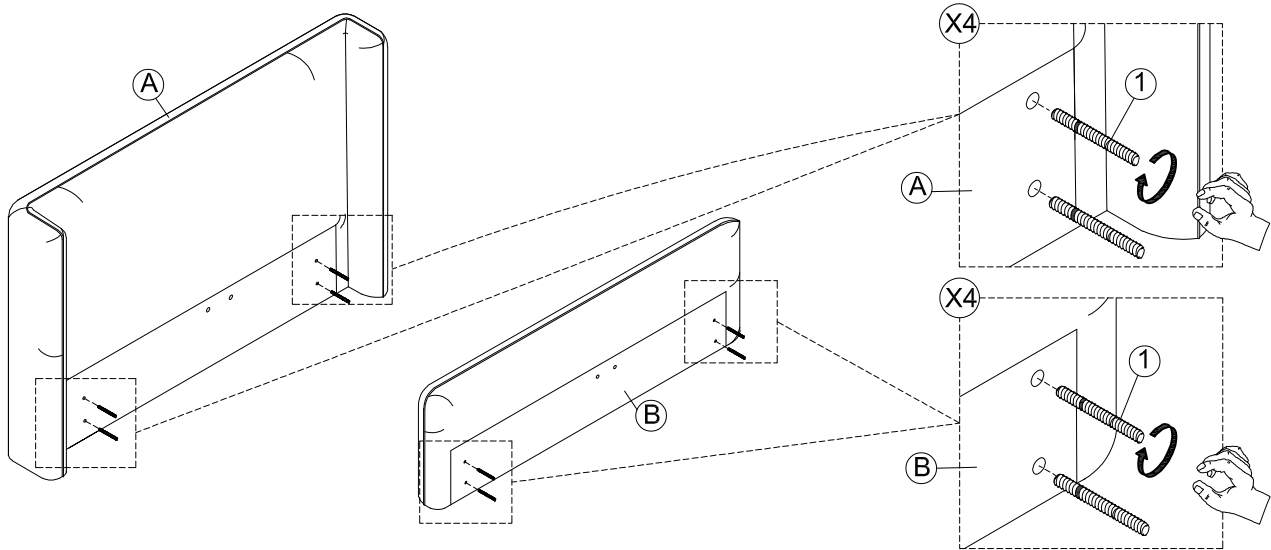

STEP 2:

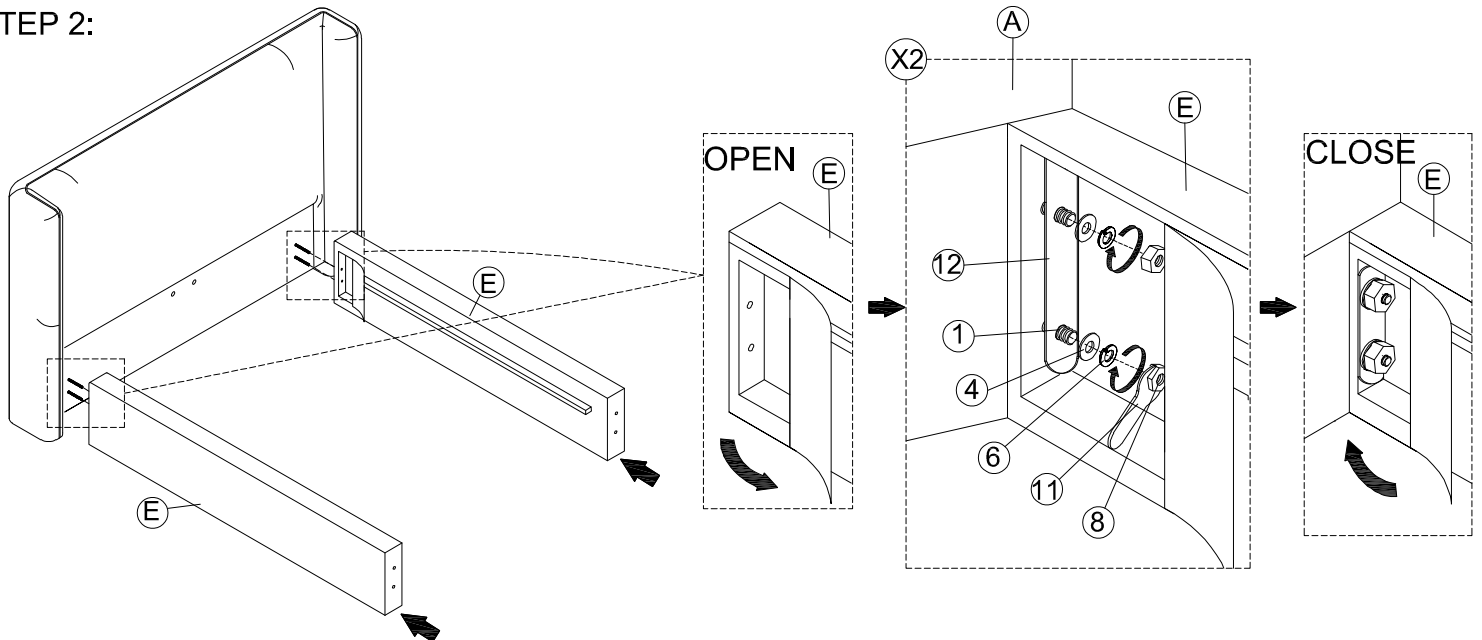

STEP 3:

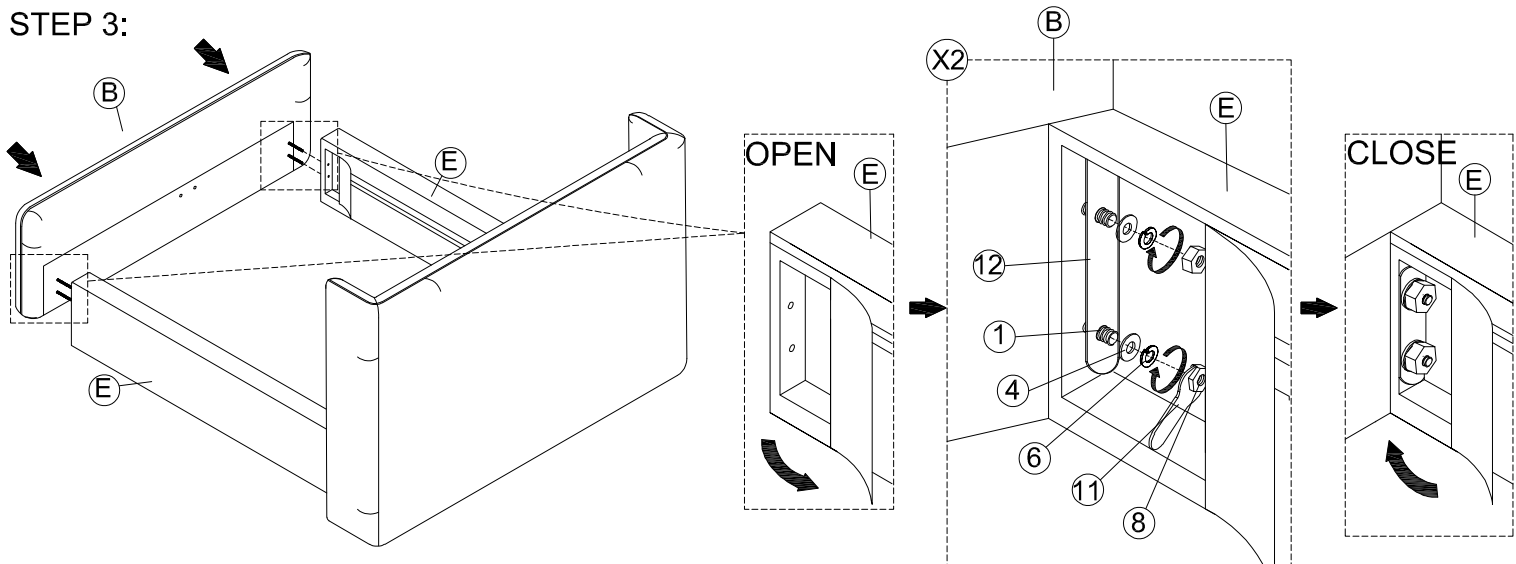

STOP


- IF USING BED WITH AN ADJUSTABLE MATTRESS BASE, SKIP STEPS 4-8 AND REFERENCE APPENDIX A: ADJUSTABLE MATTRESS BASE ASSEMBLY SUPPLEMENT.
- IF USING BED FRAME WITH STANDARD BOX SPRING OR FOUNDATION, CONTINUE TO STEP 4

BACALL UPHOLSTERED QUEEN PLATFORM BED


ASSEMBLY INSTRUCTIONS




STEP 4:

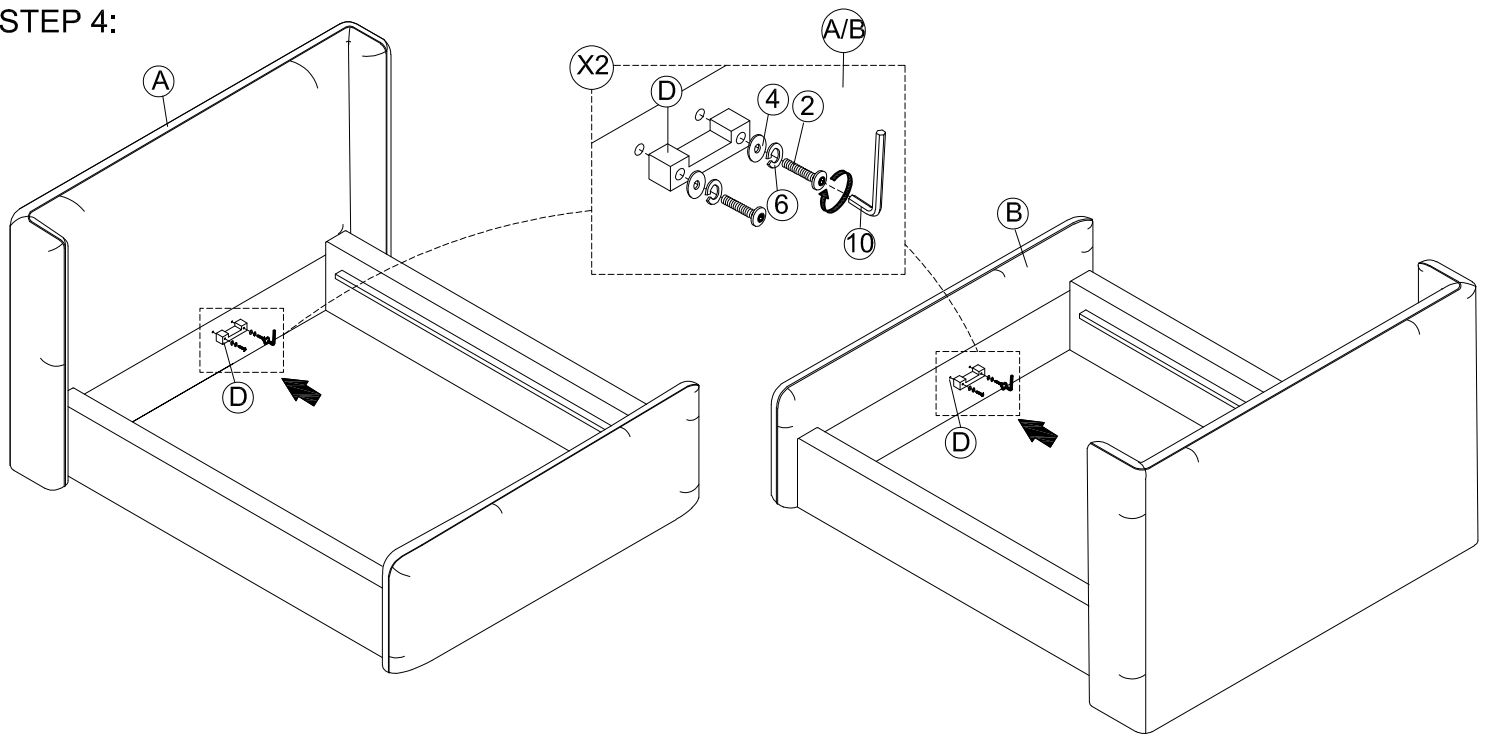

STEP 5:

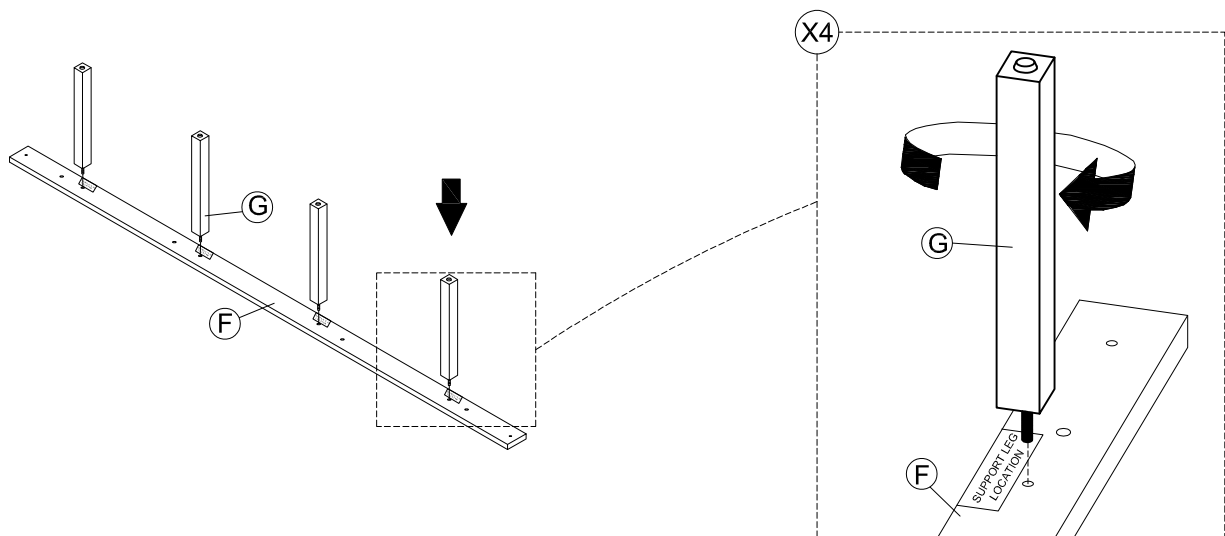

STEP 6:

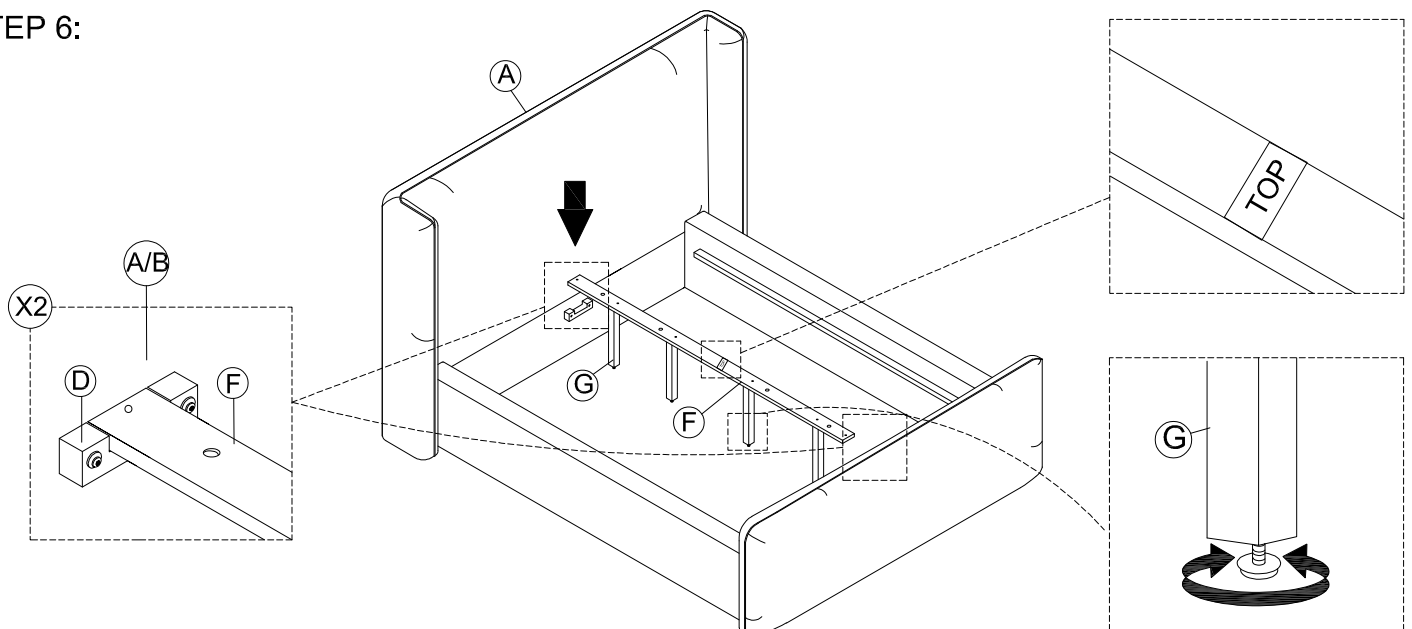


BACALL UPHOLSTERED QUEEN PLATFORM BED


ASSEMBLY INSTRUCTIONS



STEP 7:

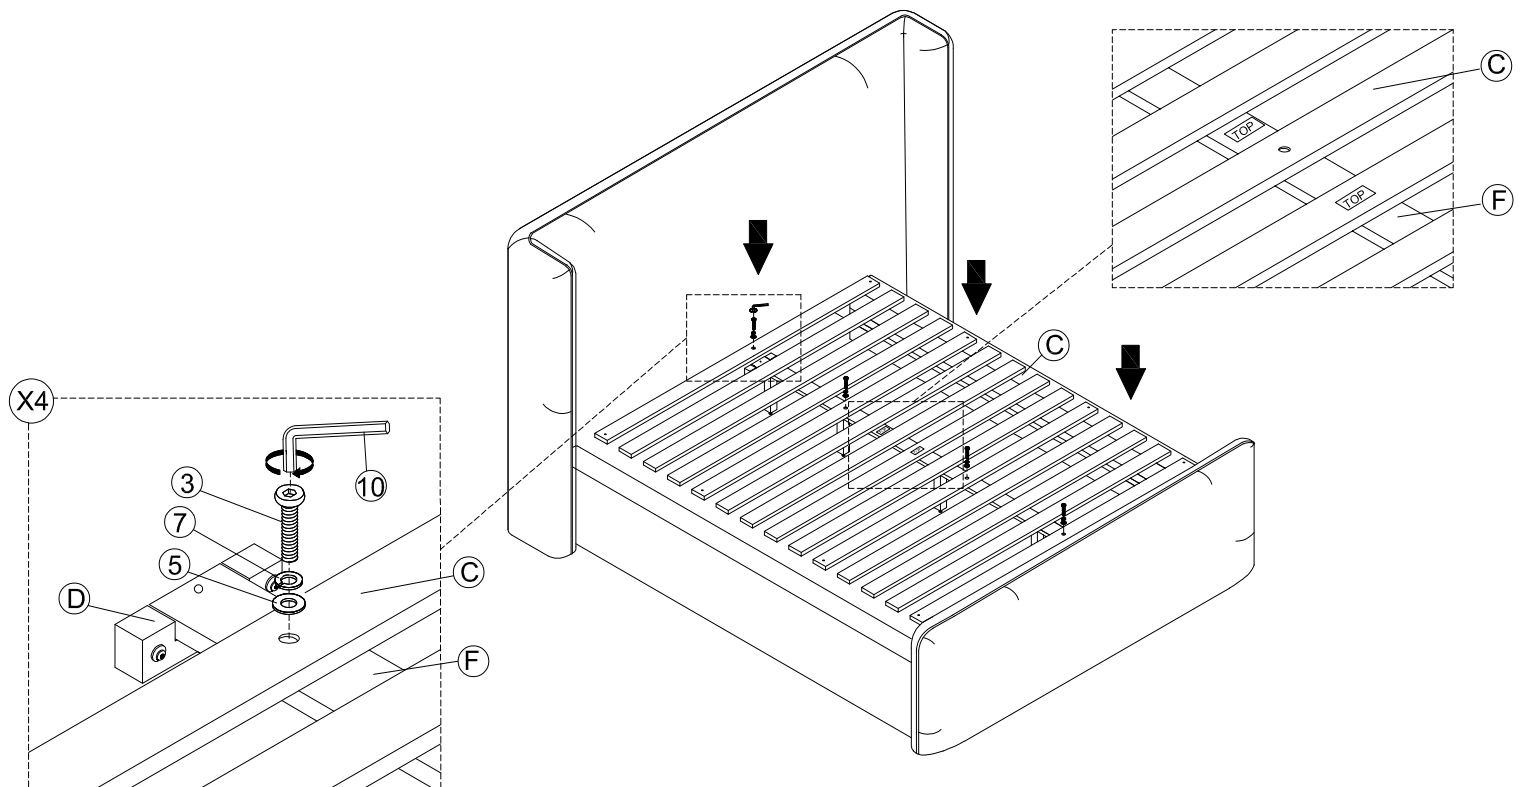


STEP 8:

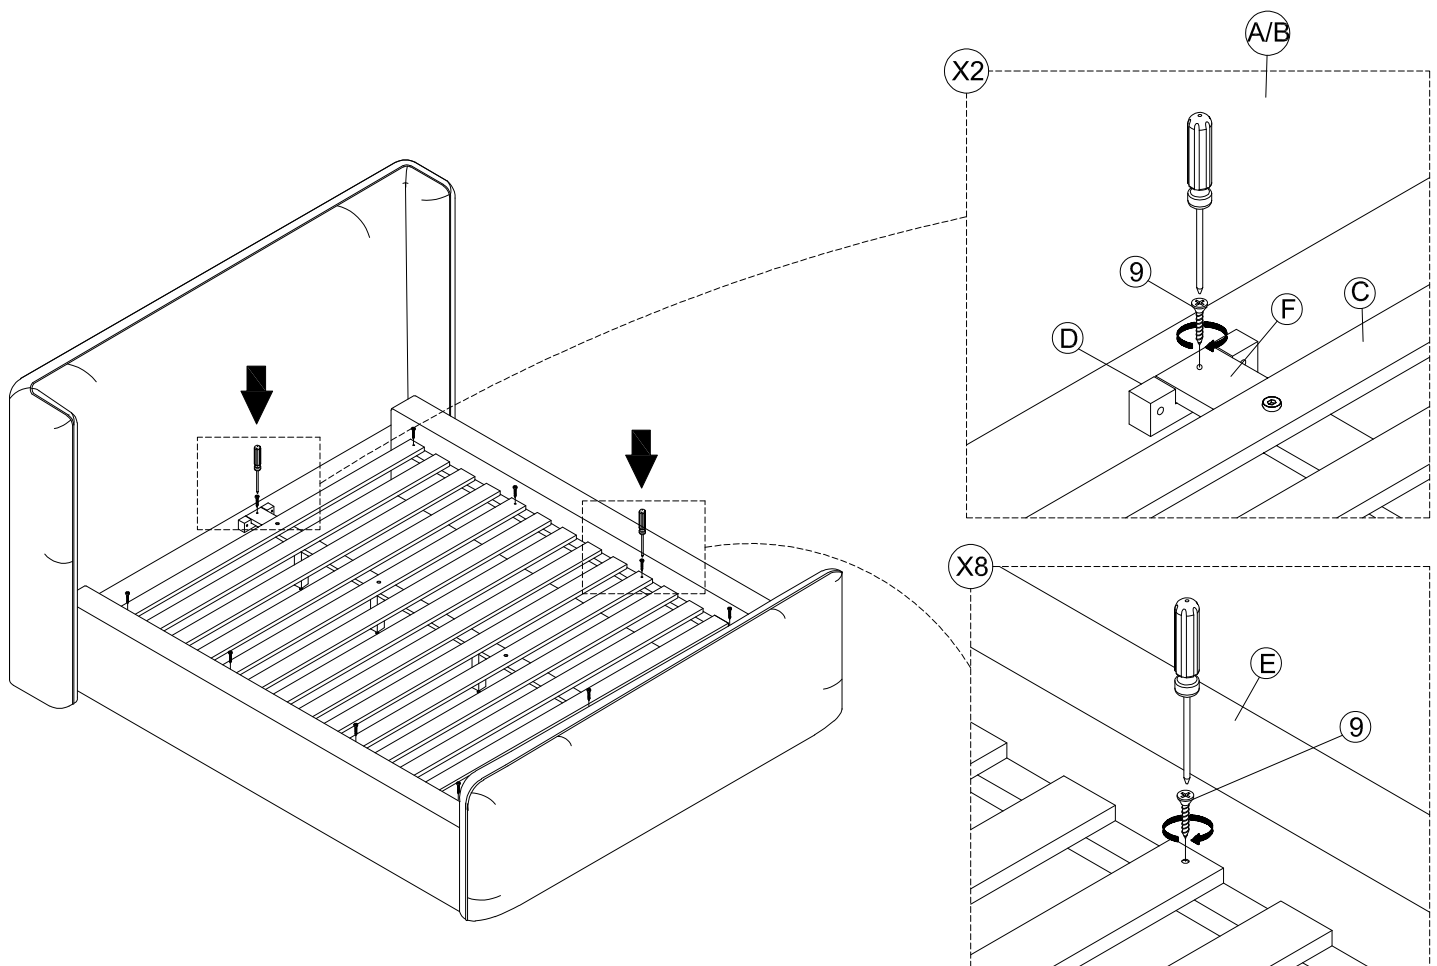

BACALL UPHOLSTERED QUEEN PLATFORM BED

ASSEMBLY INSTRUCTIONS

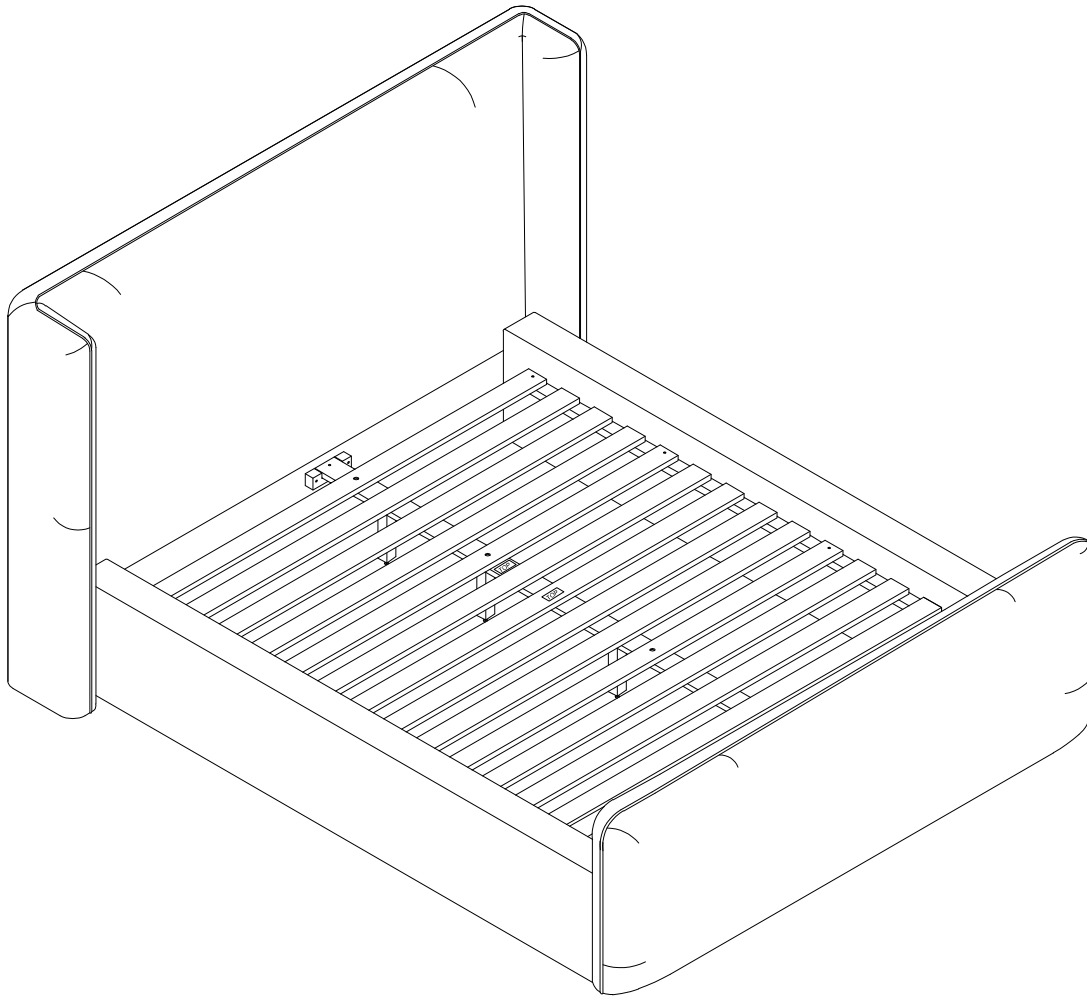


ASSEMBLY COMPLETE

INSTRUCTIONS FOR ADJUSTING LEVELERS:

Position the bed in your space and locate the leveler under each support leg.

Turn the leveler counter-clockwise to extend the leveler and clockwise to retract it.

Adjust each leveler until each support leg is applying equal, upward pressure on the support slat.



MAINTENANCE INSTRUCTIONS:

- Periodically check all fittings and tighten if necessary, as they can loosen over time.
- Always remove box spring and mattress before moving the bed.
- Lift the bed when moving it. Dragging the bed can damage the center support.
- Readjust levelers after moving the bed.

BACALL UPHOLSTERED QUEEN PLATFORM BED

ASSEMBLY INSTRUCTIONS



APPENDIX A: ADJUSTABLE MATTRESS BASE ASSEMBLY SUPPLEMENT

AN ADJUSTABLE MATTRESS BASE IS A FREESTANDING MATTRESS SUPPORT THAT SITS WITHIN THE PERIMETER OF THE BED FRAME.

IF USING THIS BED FRAME WITH A STANDARD BOX SPRING OR FOUNDATION THESE INSTRUCTIONS DO NOT APPLY.


PRE-ASSEMBLED SIDE RAIL CLEATS OBSTRUCT ADJUSTABLE BASE INSTALLATION AND OPERATION. FOLLOW THESE INSTRUCTIONS TO REMOVE THEM.

THE FOLLOWING PARTS ARE NOT REQUIRED FOR ADJUSTABLE MATTRESS BASE INSTALLATION:

C. SLAT ROLL	1 SET
D. CENTER SLAT SUPPORT CLEAT	2 PCS
F. CENTER SLAT SUPPORT	1 PC
G. SUPPORT LEG	4 PCS

STEP 1:

USE ALLEN KEY (10) TO UNSCREW ALLEN BOLTS AND REMOVE PRE-ASSEMBLED SIDE RAIL CLEATS.

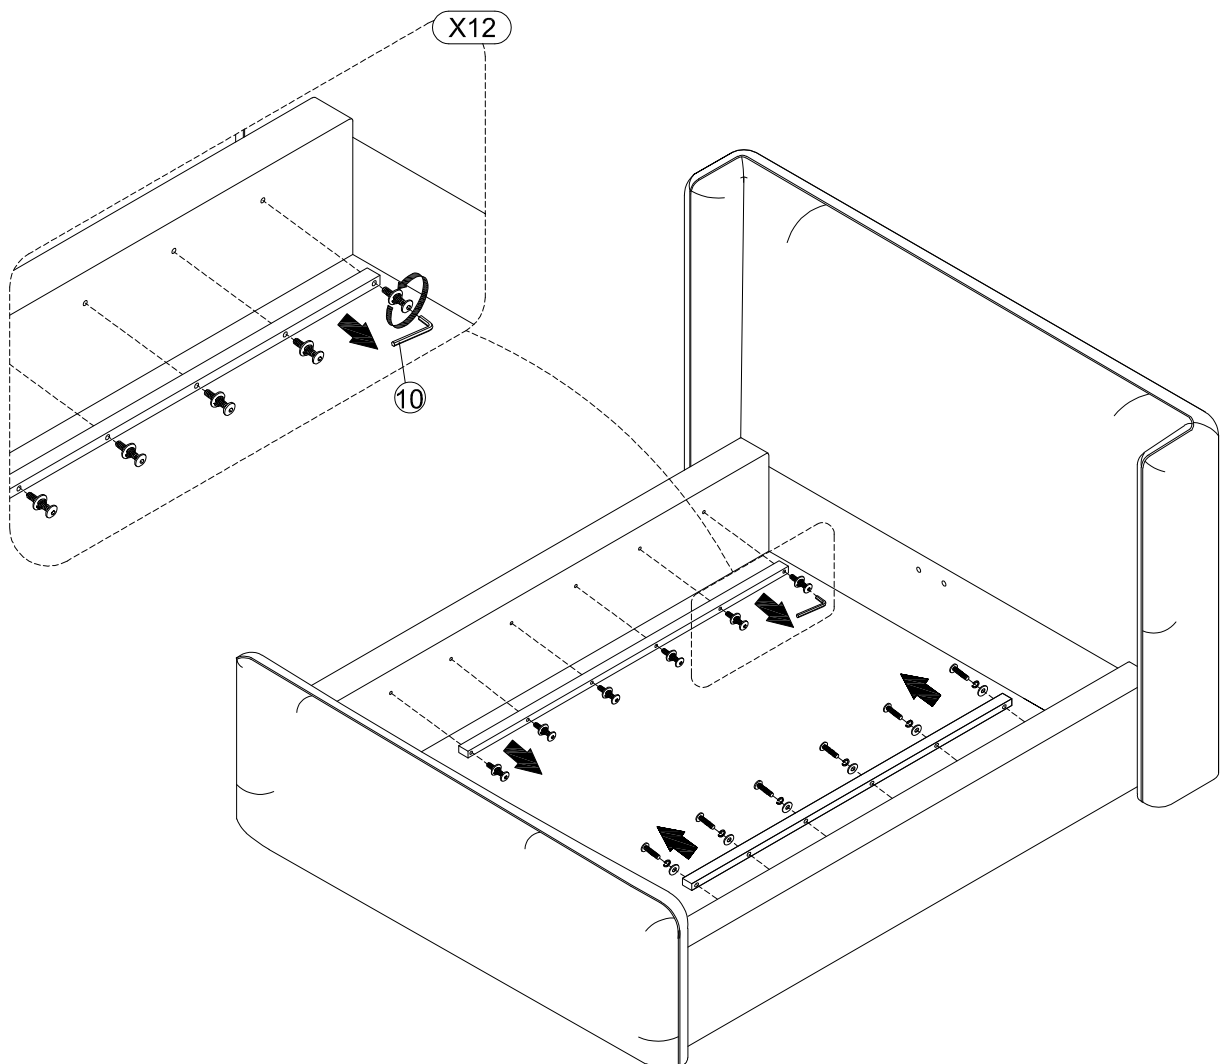

NOTE: YOU MAY WISH TO RETAIN UNUSED PARTS IF IN THE FUTURE YOU INTEND TO USE THE BED FRAME WITH A STANDARD BOX SPRING OR FOUNDATION

BACALL UPHOLSTERED KING PLATFORM BED


ASSEMBLY INSTRUCTIONS



BOX#1

A. HEADBOARD

1 PC

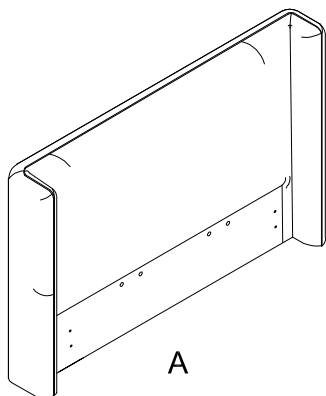

A

BOX#2

B. FOOTBOARD


1 PC

C. SLAT ROLL


1 SET

D. CENTER SLAT SUPPORT CLEAT

4 PCS



B

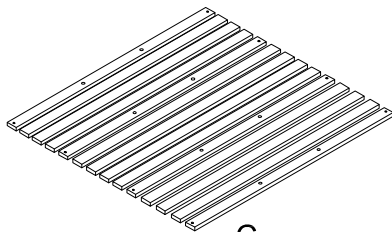

C



D

BOX#3

E. SIDE RAIL


2 PCS

F. CENTER SLAT SUPPORT


2 PCS

G. SUPPORT LEG

8 PCS



E



F






G

HARDWARE KIT PACKED IN BOX #2

No.	Description	Image	Quantity
1	THREADED BOLT (5/16"x 3-1/2")		8 PCS
2	ALLEN BOLT (5/16"x 2-1/2")		8 PCS
3	ALLEN BOLT (1/4"x 1-1/4")		8 PCS
4	FLAT WASHER (5/16")		16 PCS
5	FLAT WASHER (1/4")		8 PCS
6	LOCK WASHER (5/16")		16 PCS
7	LOCK WASHER (1/4")		8 PCS
8	HEX NUT (5/16")		8 PCS
9	PHILLIPS SCREW (M4 x 32mm)		12 PCS
10	ALLEN KEY (5/16")		1 PC
11	WRENCH		1 PC
12	CONNECTING BRACKET		4 PCS

FULLY ASSEMBLED

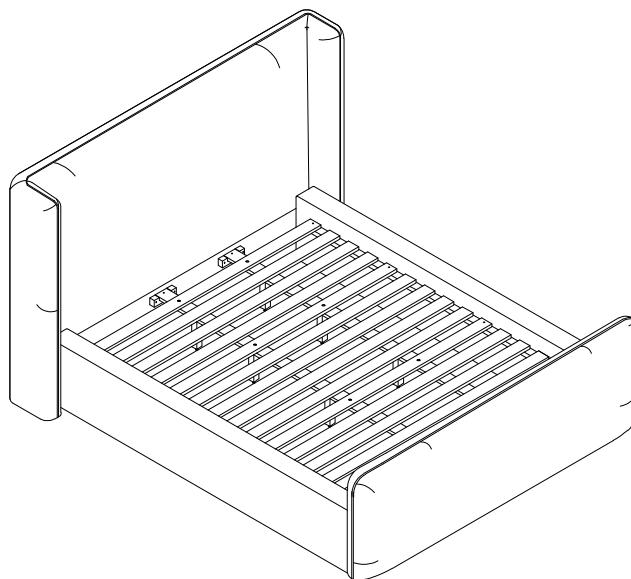


BACALL UPHOLSTERED KING PLATFORM BED


ASSEMBLY INSTRUCTIONS




STEP 1:

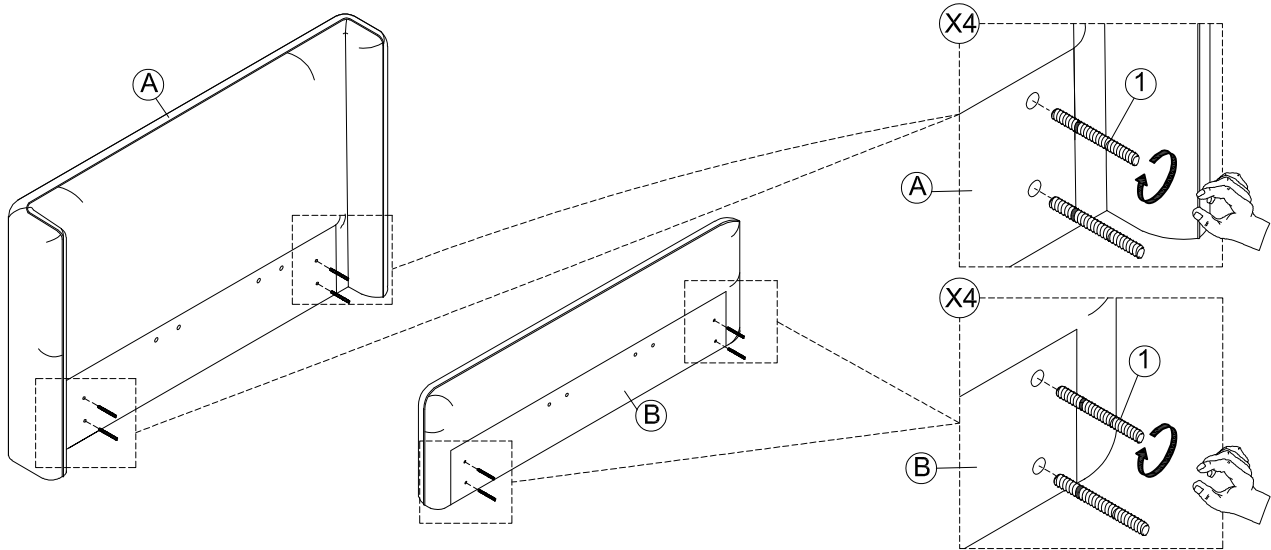

STEP 2:

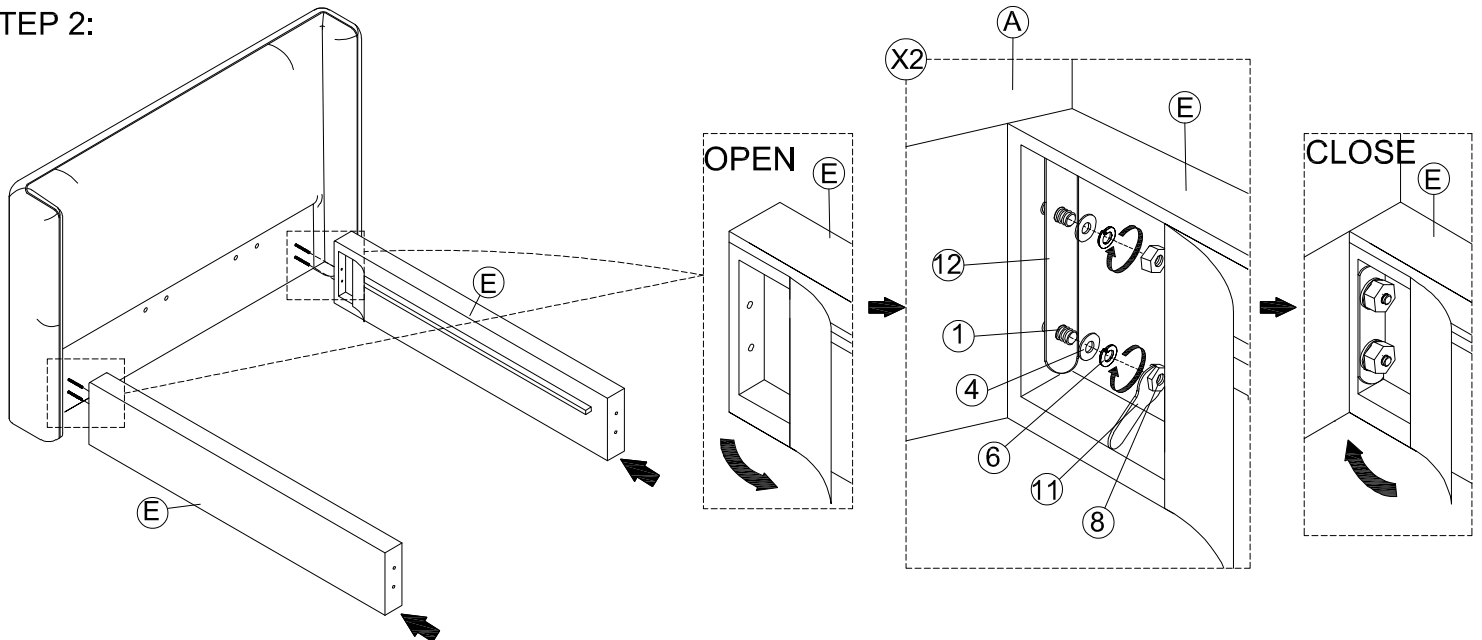

STEP 3:

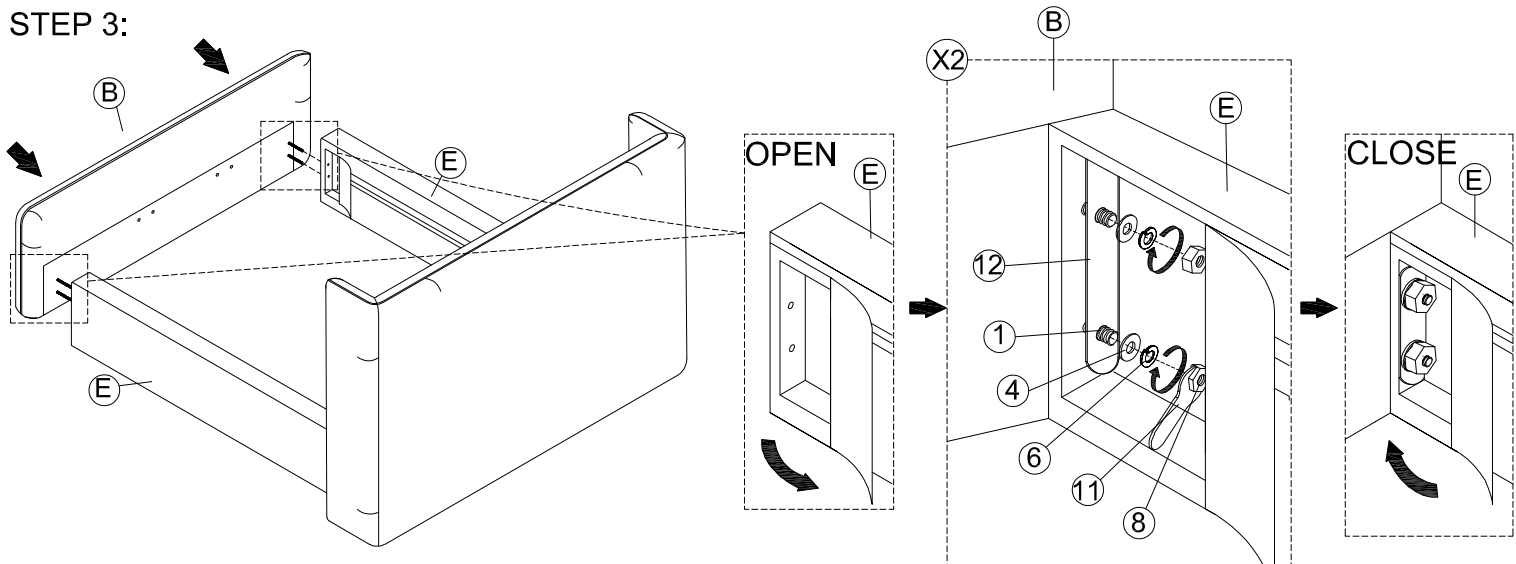

STOP

- IF USING BED WITH AN ADJUSTABLE MATTRESS BASE, SKIP STEPS 4-8 AND REFERENCE APPENDIX A: ADJUSTABLE MATTRESS BASE ASSEMBLY SUPPLEMENT.
- IF USING BED FRAME WITH STANDARD BOX SPRING OR FOUNDATION, CONTINUE TO STEP 4

STEP 4:

The diagram illustrates the final assembly steps for the drawer unit. On the left, the bottom panel (A) is shown being inserted into the frame. On the right, the drawer front (B) is shown being attached to the drawer box. A callout for the drawer front hardware (D) shows the components: screws (4, 6), washers (2), and a bracket (10). Another callout for the drawer front hardware (A/B) shows the components: screws (4, 6), washers (2), and a bracket (10). Arrows indicate the direction of assembly.

EP 5:

Diagram illustrating the assembly of the support leg (G) onto the main structure (F). The diagram shows the leg being attached to the underside of the main structure, with a callout (X8) indicating the specific location for the leg's attachment. The leg is shown in a vertical position, and the main structure is shown in a horizontal position. The leg is labeled (G) and the main structure is labeled (F). The callout (X8) points to the location where the leg is attached to the main structure. The leg is shown in a vertical position, and the main structure is shown in a horizontal position. The leg is labeled (G) and the main structure is labeled (F). The callout (X8) points to the location where the leg is attached to the main structure.


[illegible]

BACALL UPHOLSTERED KING PLATFORM BED


ASSEMBLY INSTRUCTIONS



STEP 7:

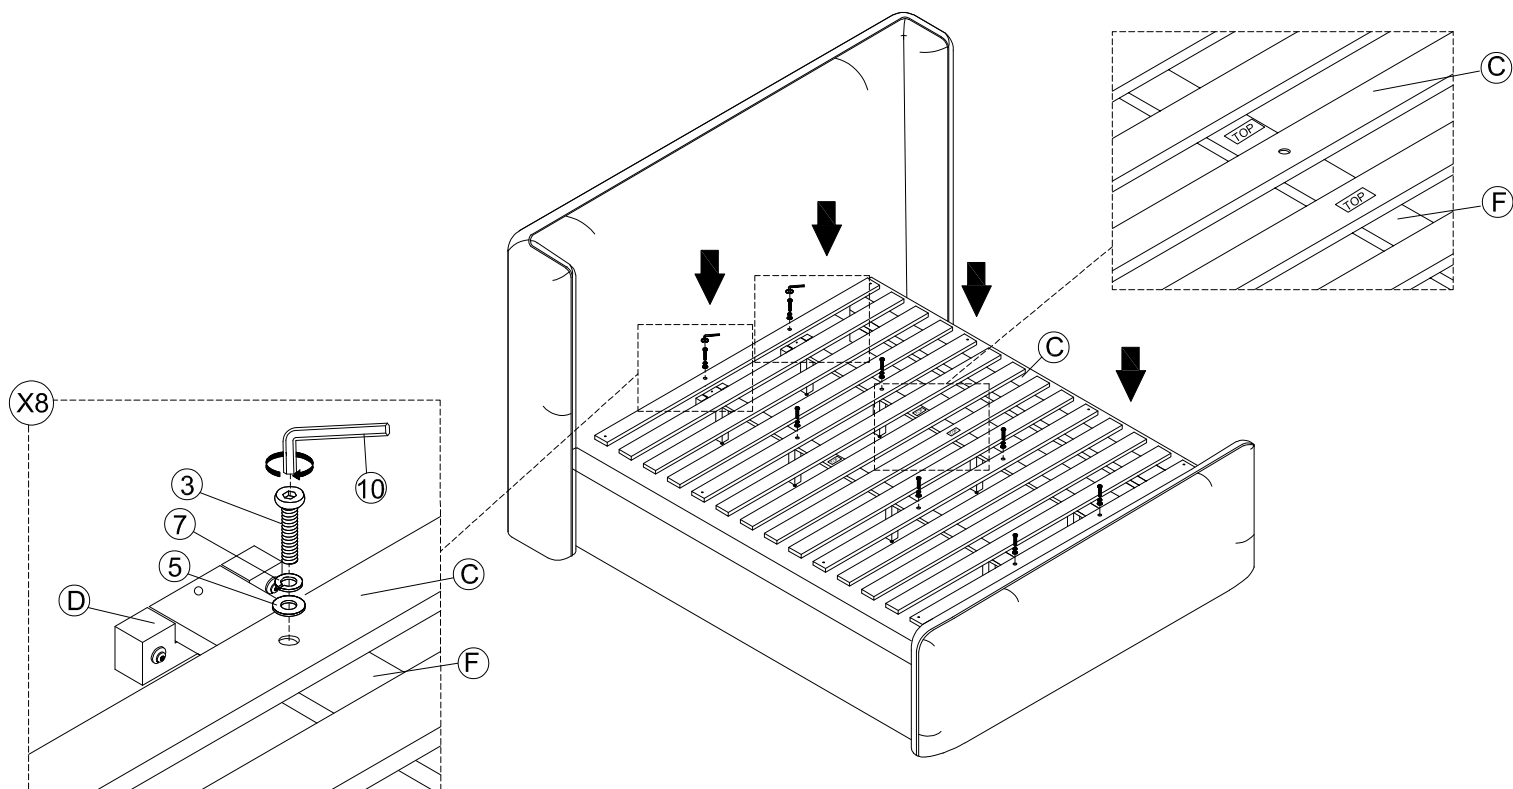


STEP 8:

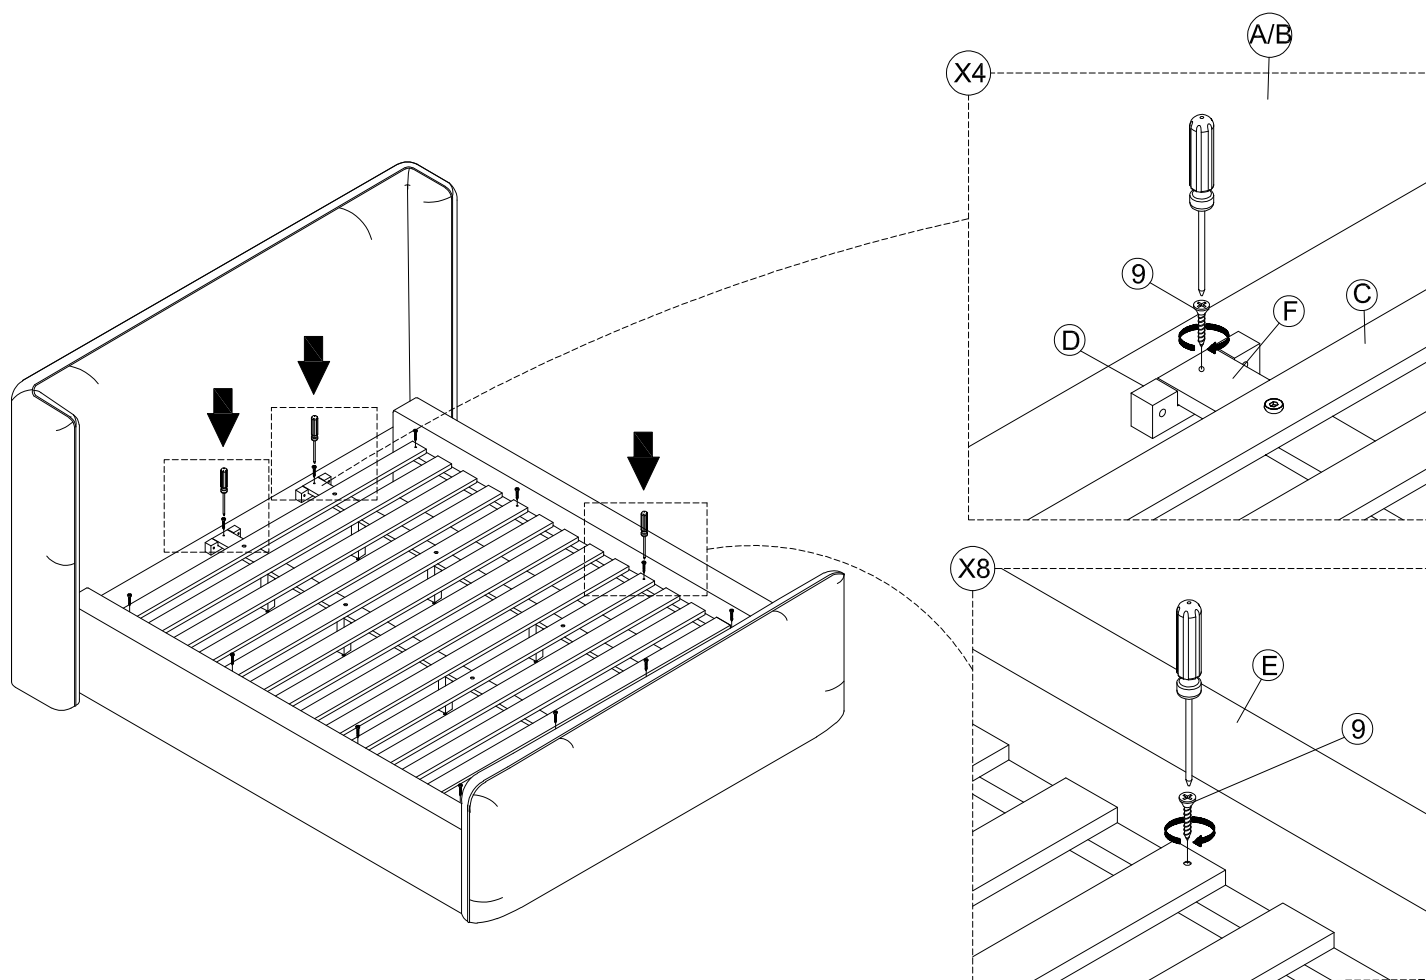

BACALL UPHOLSTERED KING PLATFORM BED

ASSEMBLY INSTRUCTIONS

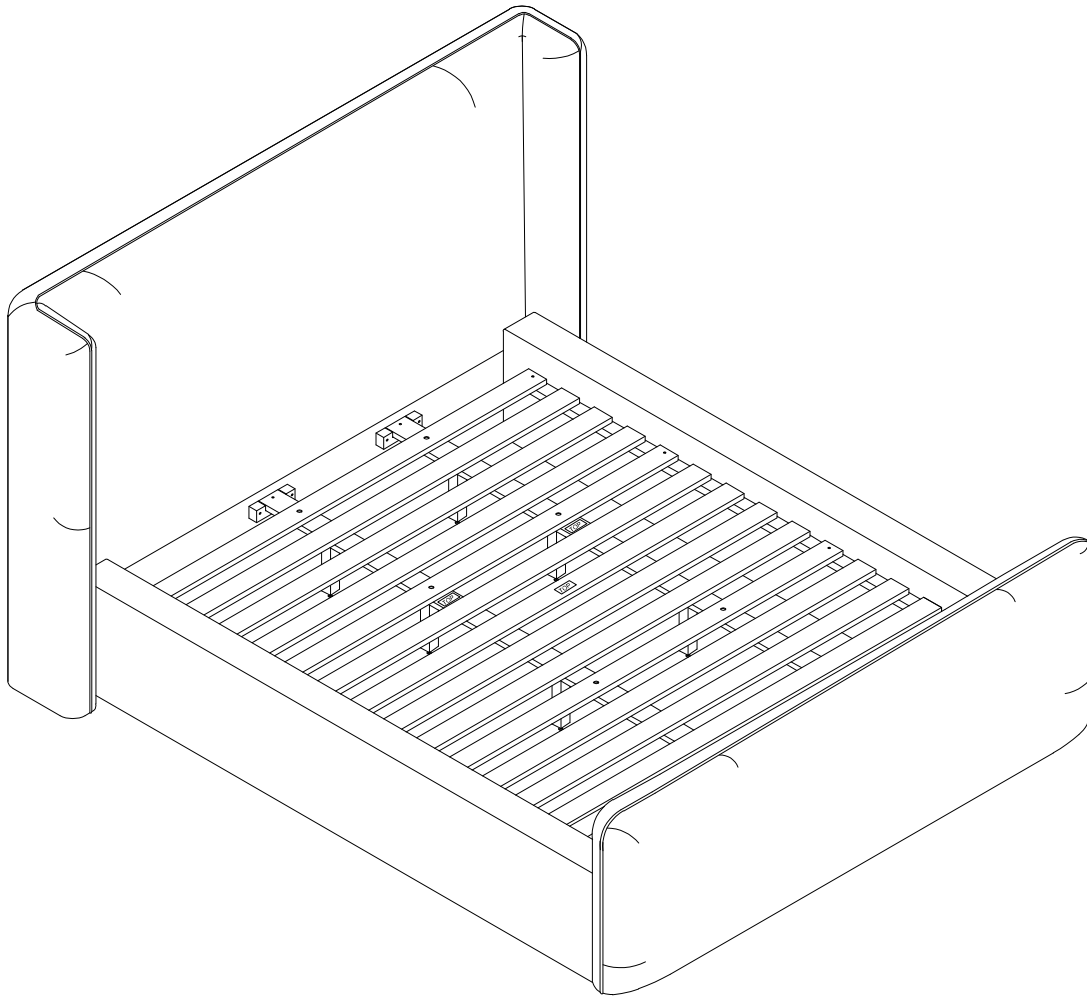


ASSEMBLY COMPLETE

INSTRUCTIONS FOR ADJUSTING LEVELERS:

Position the bed in your space and locate the leveler under each support leg.

Turn the leveler counter-clockwise to extend the leveler and clockwise to retract it.

Adjust each leveler until each support leg is applying equal, upward pressure on the support slat.



MAINTENANCE INSTRUCTIONS:

- Periodically check all fittings and tighten if necessary, as they can loosen over time.
- Always remove box spring and mattress before moving the bed.
- Lift the bed when moving it. Dragging the bed can damage the center support.
- Readjust levelers after moving the bed.

BACALL UPHOLSTERED KING PLATFORM BED

ASSEMBLY INSTRUCTIONS



APPENDIX A: ADJUSTABLE MATTRESS BASE ASSEMBLY SUPPLEMENT

AN ADJUSTABLE MATTRESS BASE IS A FREESTANDING MATTRESS SUPPORT THAT SITS WITHIN THE PERIMETER OF THE BED FRAME.

IF USING THIS BED FRAME WITH A STANDARD BOX SPRING OR FOUNDATION THESE INSTRUCTIONS DO NOT APPLY.


PRE-ASSEMBLED SIDE RAIL CLEATS OBSTRUCT ADJUSTABLE BASE INSTALLATION AND OPERATION. FOLLOW THESE INSTRUCTIONS TO REMOVE THEM.

THE FOLLOWING PARTS ARE NOT REQUIRED FOR ADJUSTABLE MATTRESS BASE INSTALLATION:

C. SLAT ROLL	1 SET
D. CENTER SLAT SUPPORT CLEAT	4 PCS
F. CENTER SLAT SUPPORT	2 PCS
G. SUPPORT LEG	8 PCS

STEP 1:

USE ALLEN KEY (10) TO UNSCREW ALLEN BOLTS AND REMOVE PRE-ASSEMBLED SIDE RAIL CLEATS.

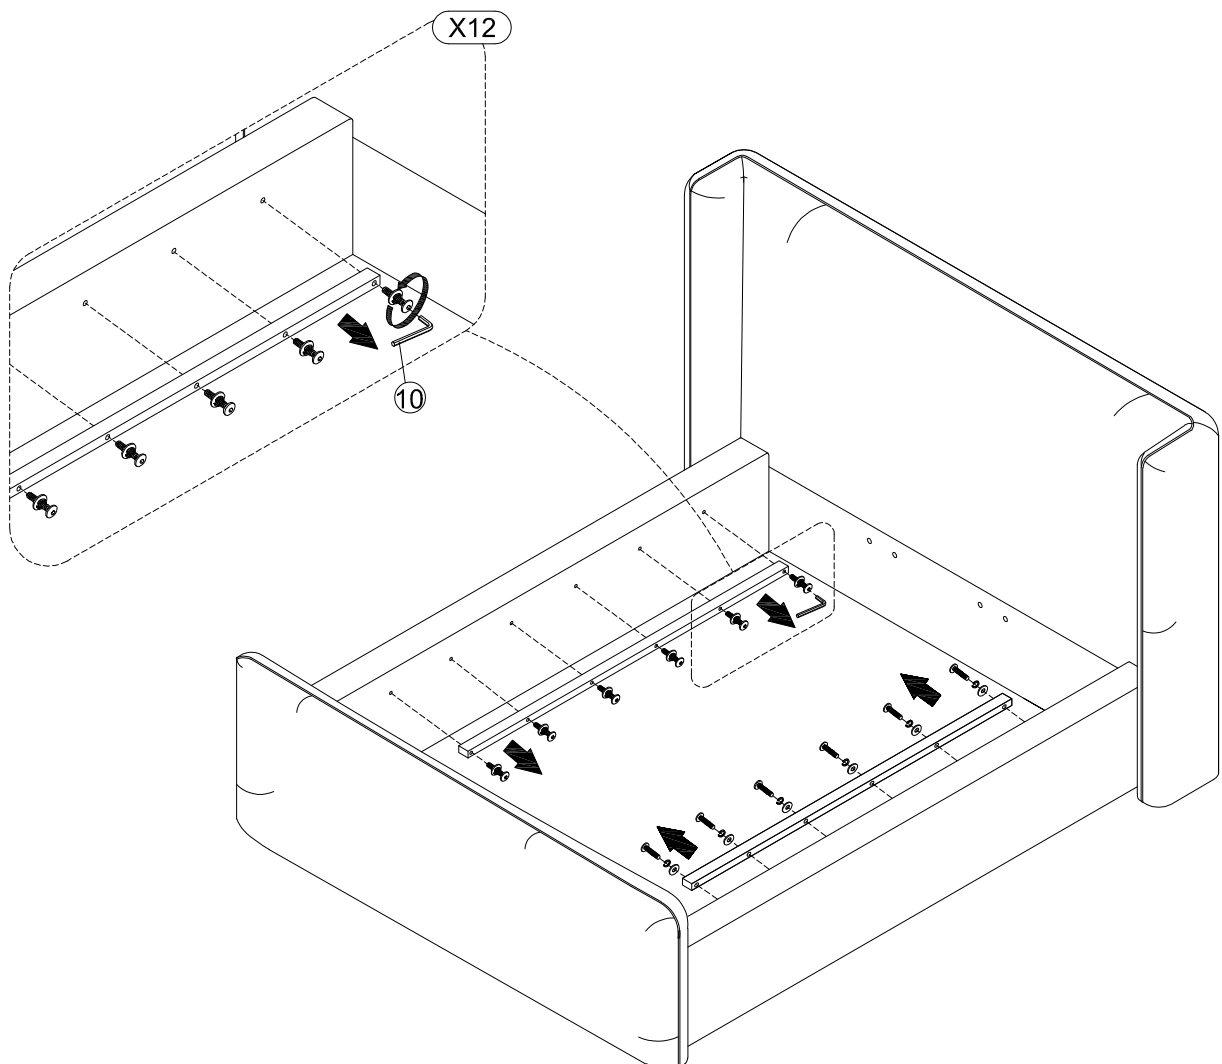

NOTE: YOU MAY WISH TO RETAIN UNUSED PARTS IF IN THE FUTURE YOU INTEND TO USE THE BED FRAME WITH A STANDARD BOX SPRING OR FOUNDATION

BACALL UPHOLSTERED C.KING PLATFORM BED


ASSEMBLY INSTRUCTIONS



BOX#1

A. HEADBOARD

1 PC

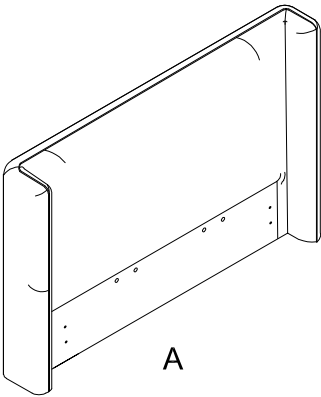

A

BOX#2

B. FOOTBOARD


1 PC

C. SLAT ROLL


1 SET

D. CENTER SLAT SUPPORT CLEAT

4 PCS



B

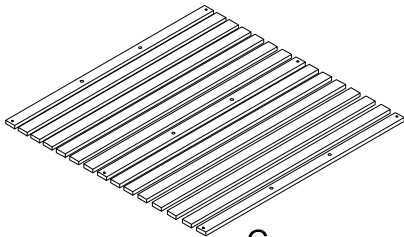

C



D

BOX#3

E. SIDE RAIL


2 PCS

F. CENTER SLAT SUPPORT


2 PCS

G. SUPPORT LEG

8 PCS



E



F





G

HARDWARE KIT PACKED IN BOX #2

No.	Description	Image	Quantity
1	THREADED BOLT (5/16"x 3-1/2")		8 PCS
2	ALLEN BOLT (5/16"x 2-1/2")		8 PCS
3	ALLEN BOLT (1/4"x 1-1/4")		6 PCS
4	FLAT WASHER (5/16")		16 PCS
5	FLAT WASHER (1/4")		6 PCS
6	LOCK WASHER (5/16")		16 PCS
7	LOCK WASHER (1/4")		6 PCS
8	HEX NUT (5/16")		8 PCS
9	PHILLIPS SCREW (M4 x 32mm)		10 PCS
10	ALLEN KEY (5/16")		1 PC
11	WRENCH		1 PC
12	CONNECTING BRACKET		4 PCS

FULLY ASSEMBLED

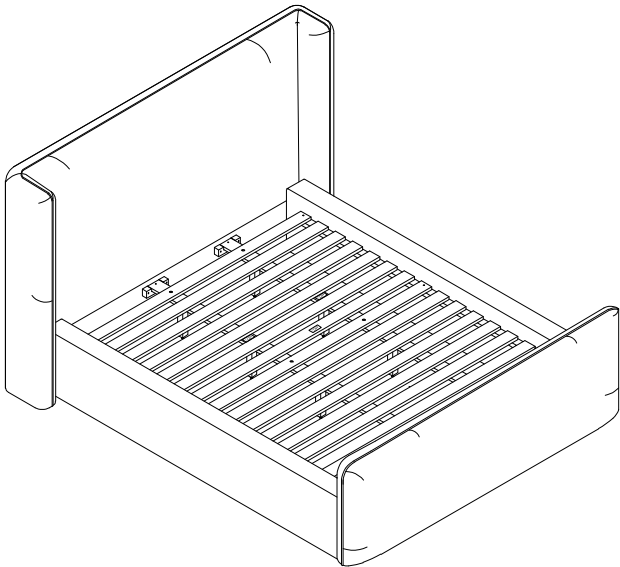


BACALL UPHOLSTERED C.KING PLATFORM BED


ASSEMBLY INSTRUCTIONS




STEP 1:

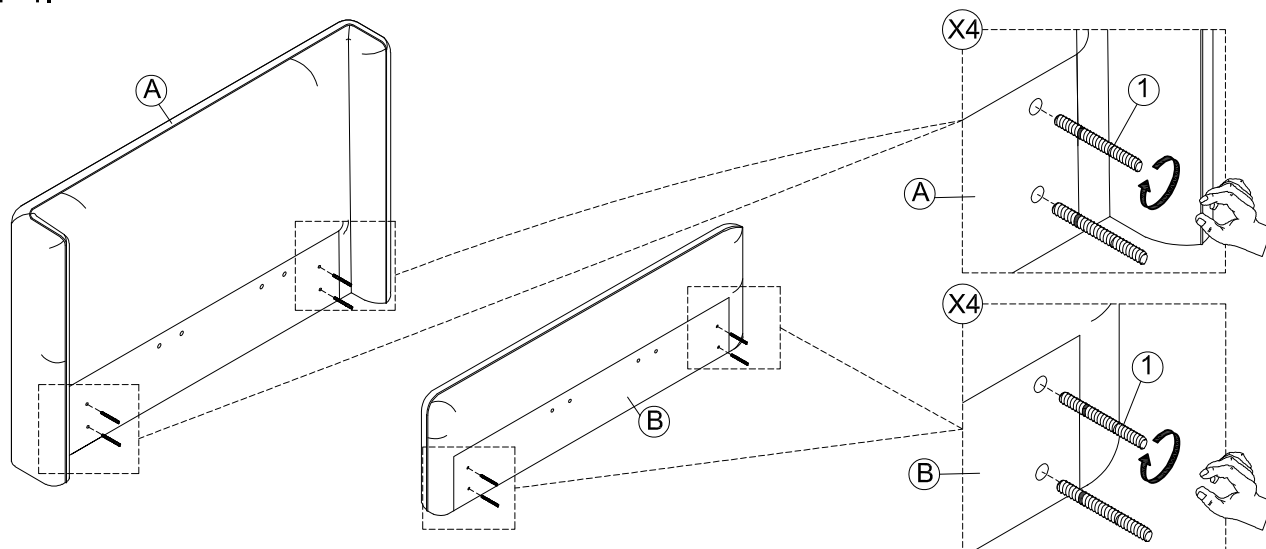

STEP 2:

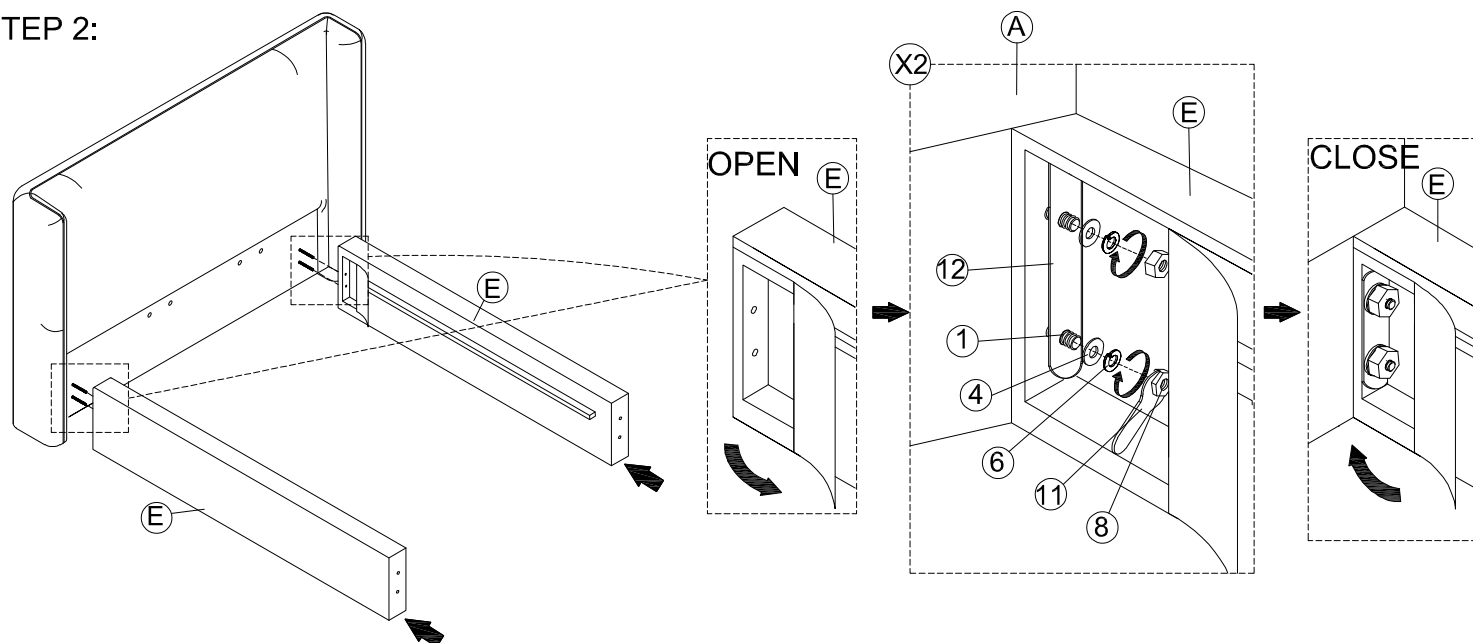

STEP 3:

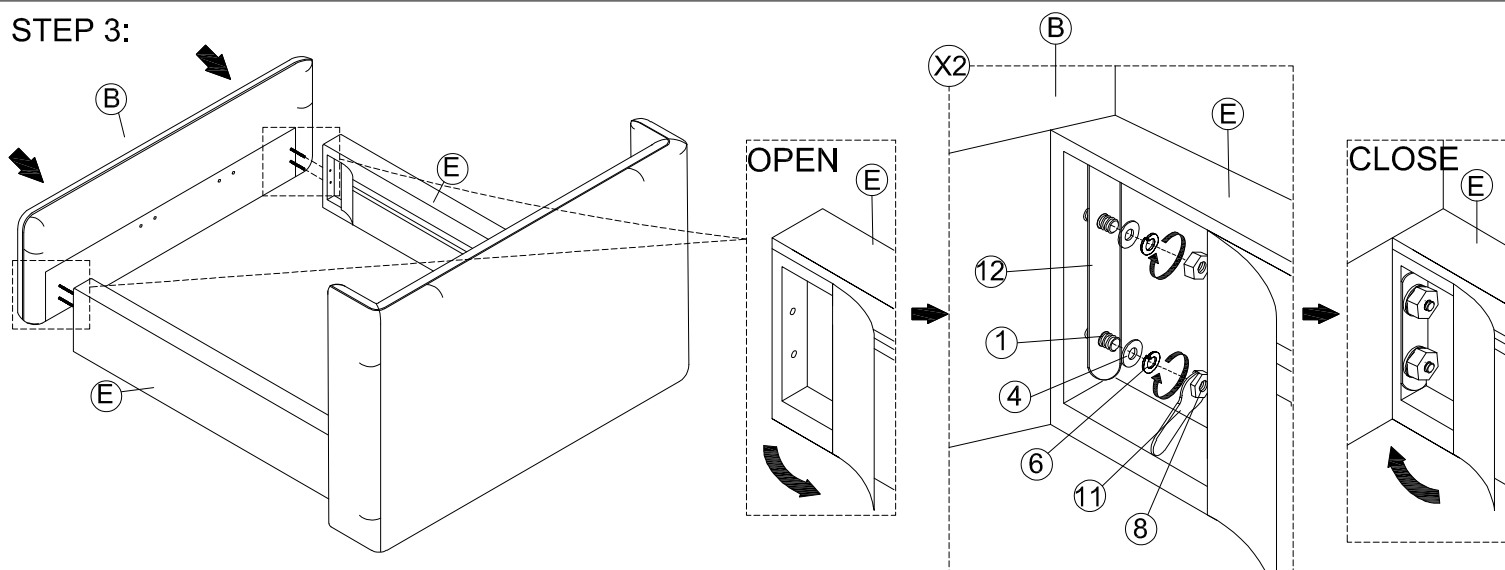


STOP

- IF USING BED WITH AN ADJUSTABLE MATTRESS BASE, SKIP STEPS 4-8 AND REFERENCE APPENDIX A: ADJUSTABLE MATTRESS BASE ASSEMBLY SUPPLEMENT.
- IF USING BED FRAME WITH STANDARD BOX SPRING OR FOUNDATION, CONTINUE TO STEP 4


BACALL UPHOLSTERED C.KING PLATFORM BED

ASSEMBLY INSTRUCTIONS


STEP 4:

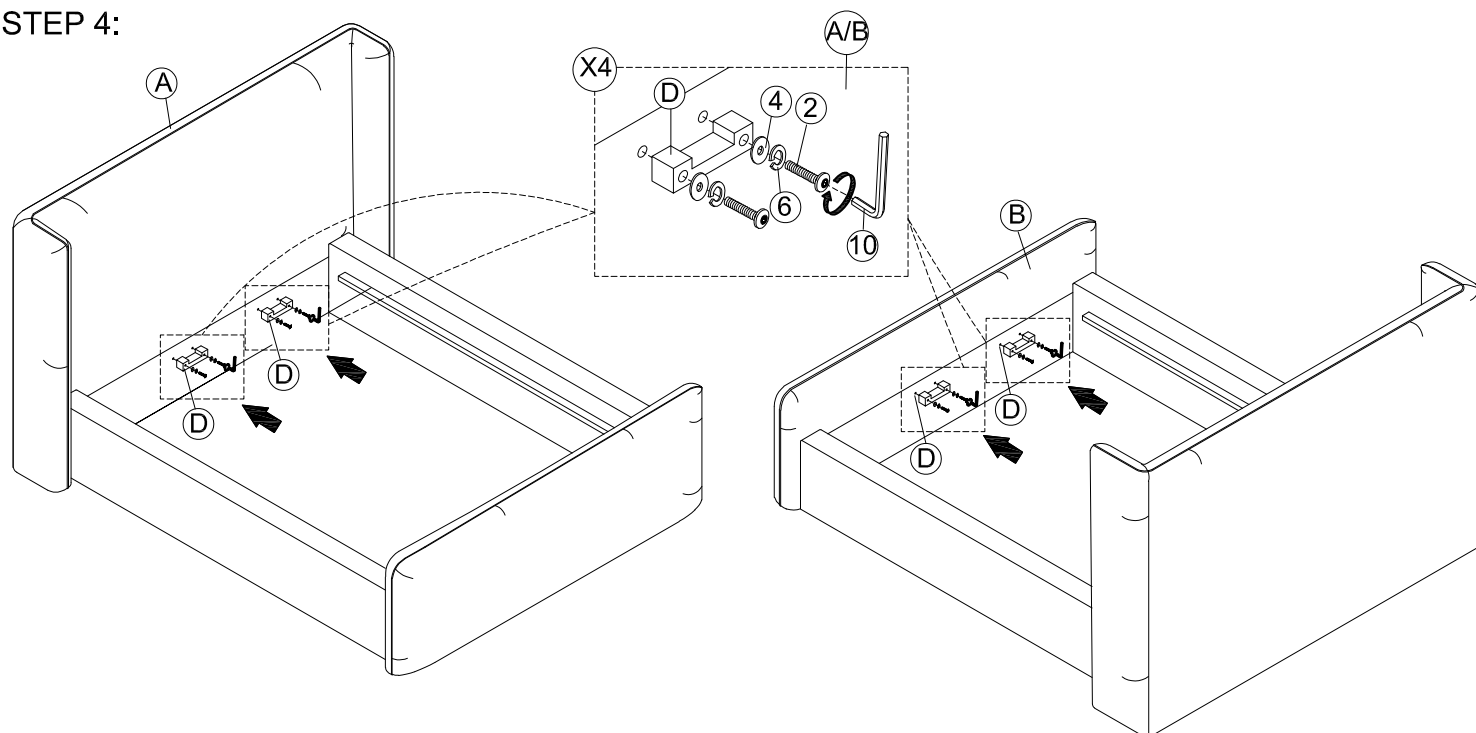

STEP 5:

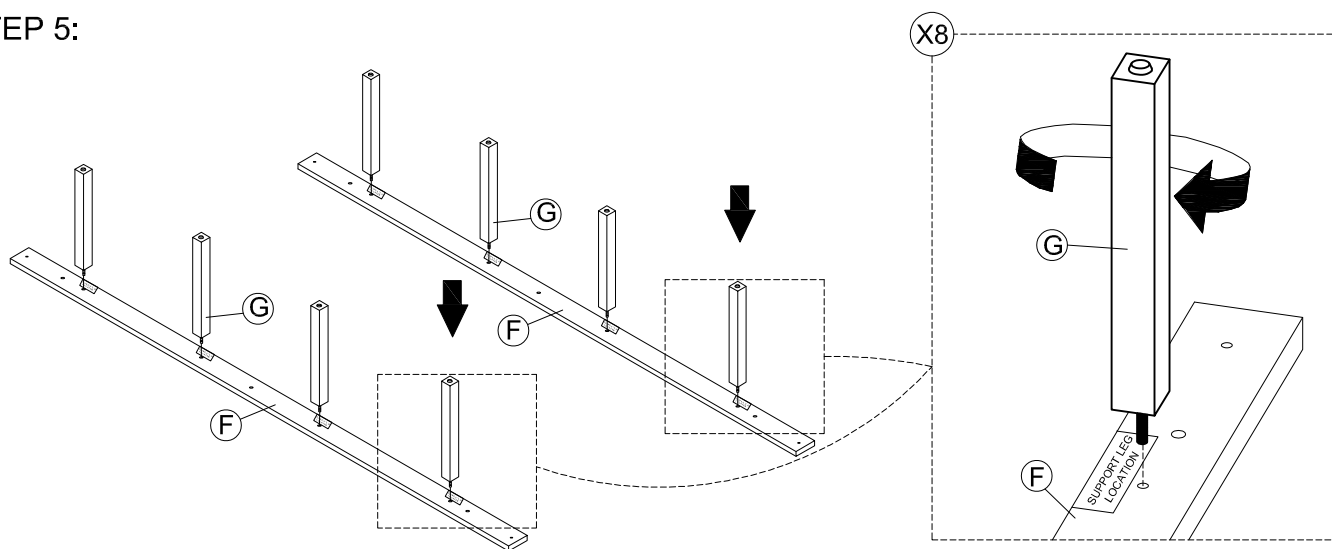

STEP 6:

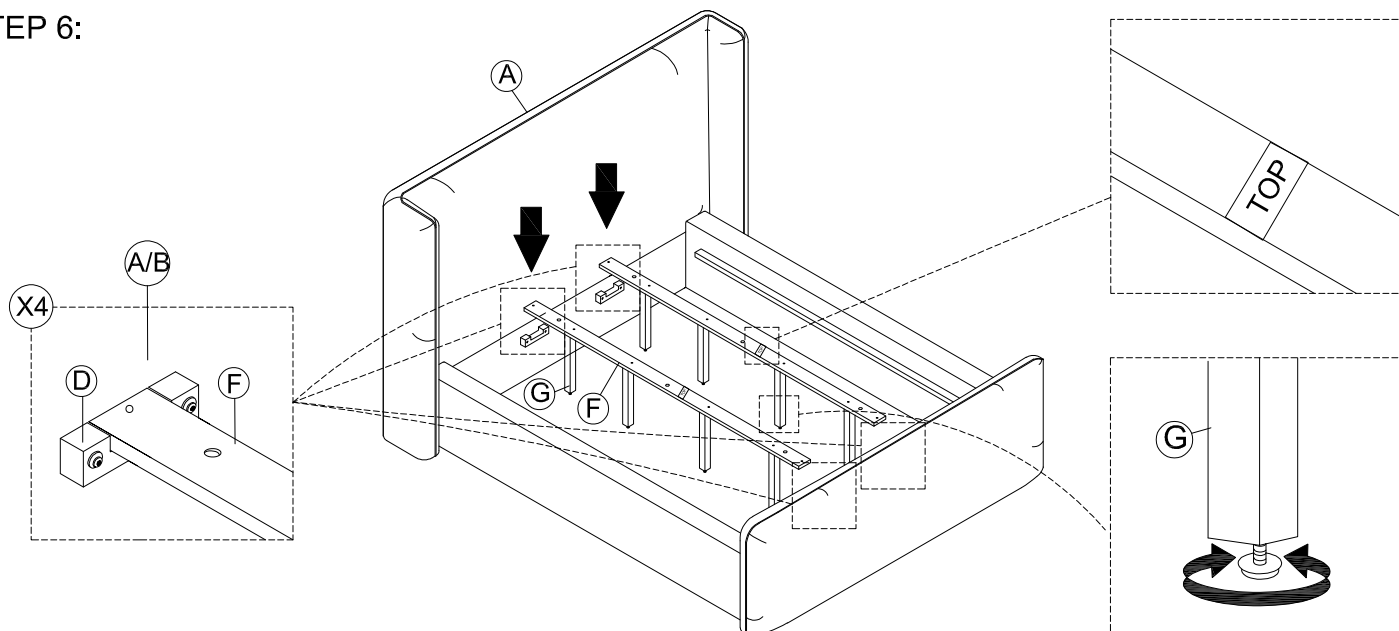


BACALL UPHOLSTERED C.KING PLATFORM BED


ASSEMBLY INSTRUCTIONS



STEP 7:

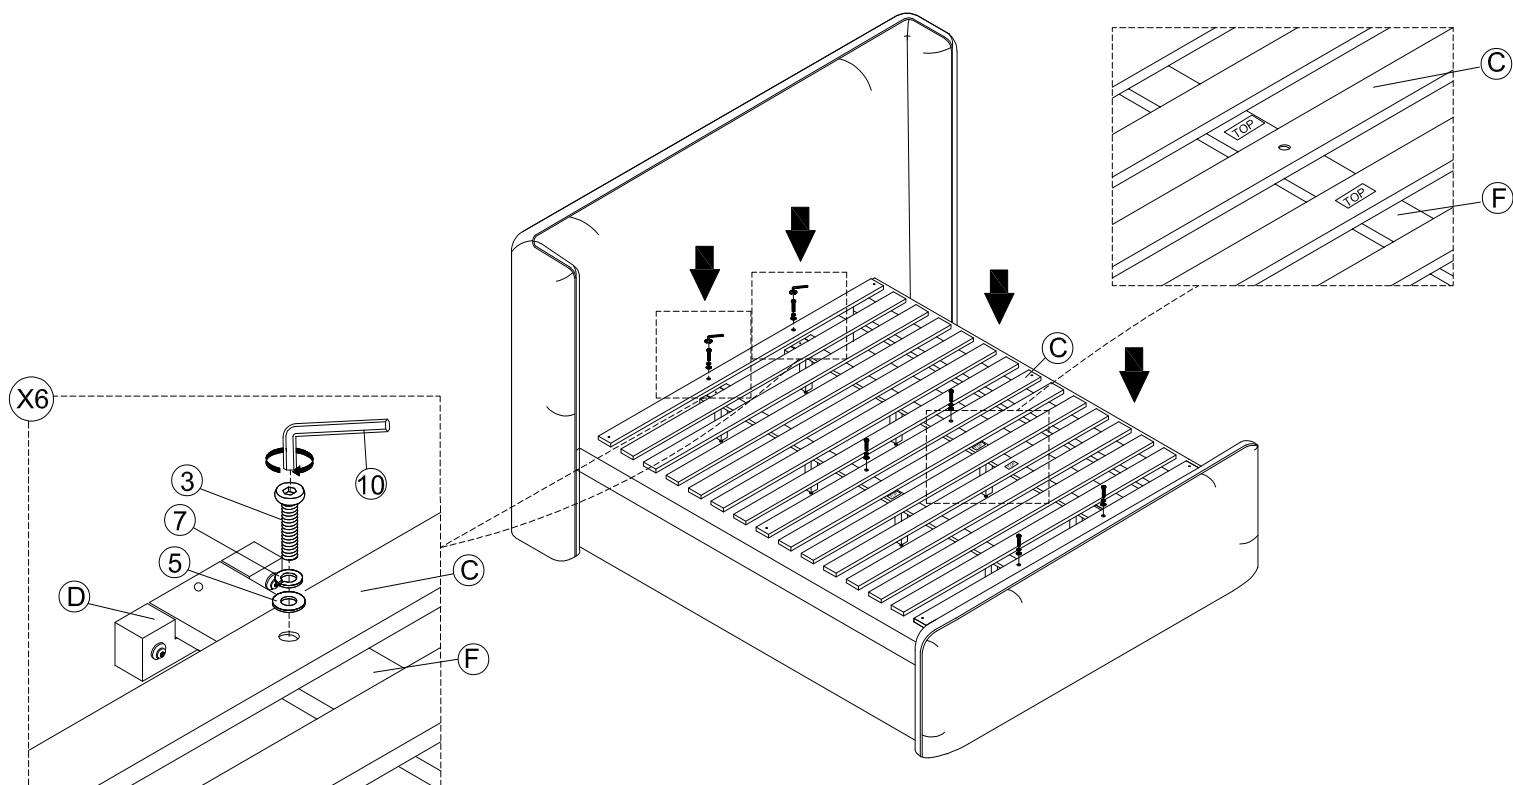


STEP 8:

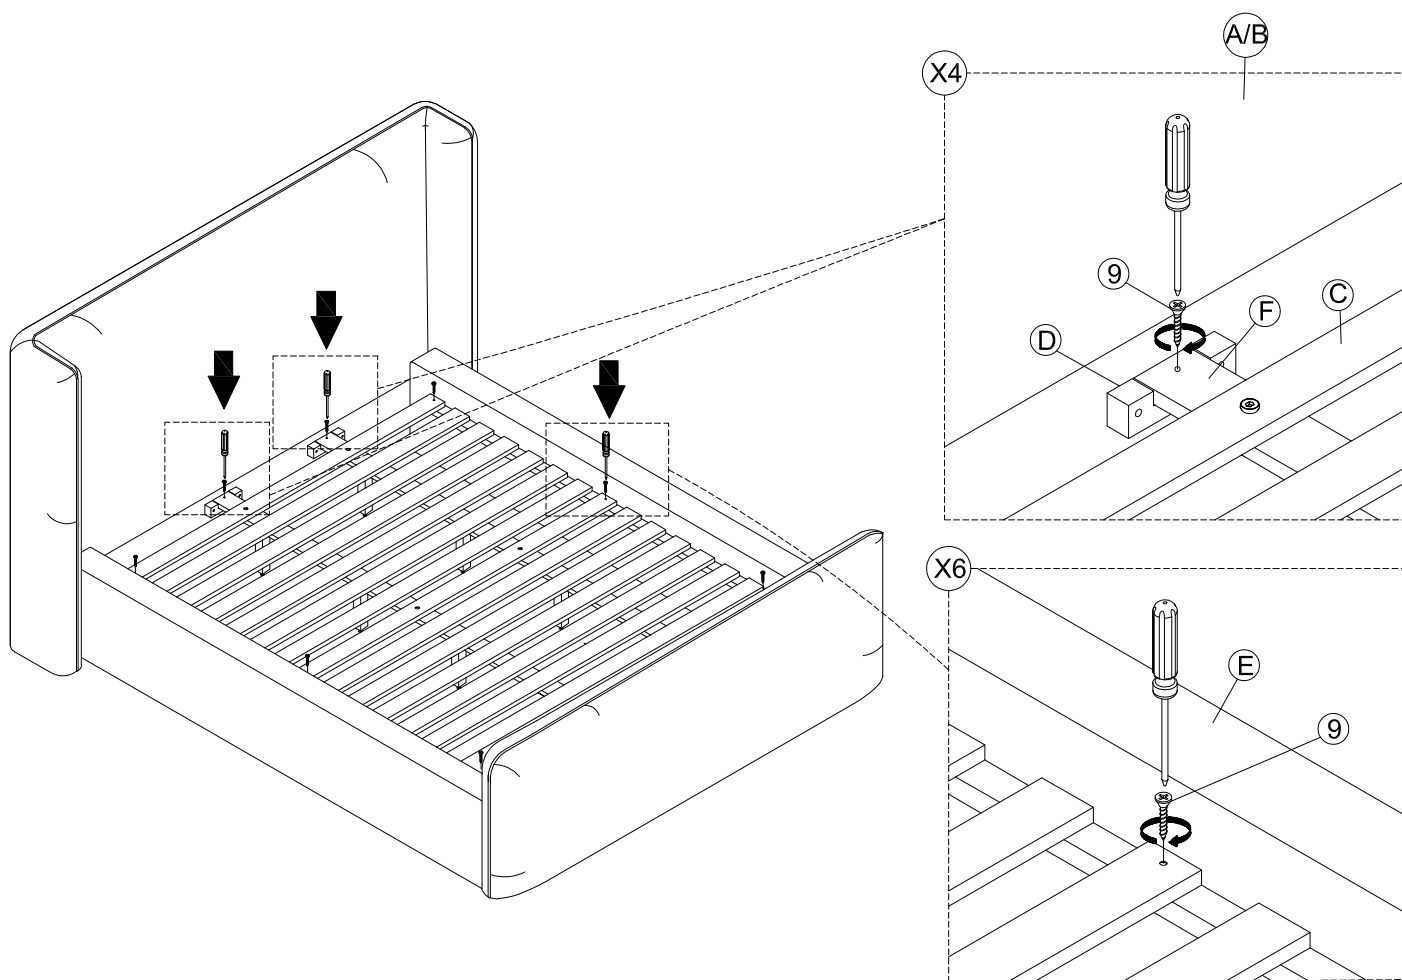

BACALL UPHOLSTERED C.KING PLATFORM BED

ASSEMBLY INSTRUCTIONS

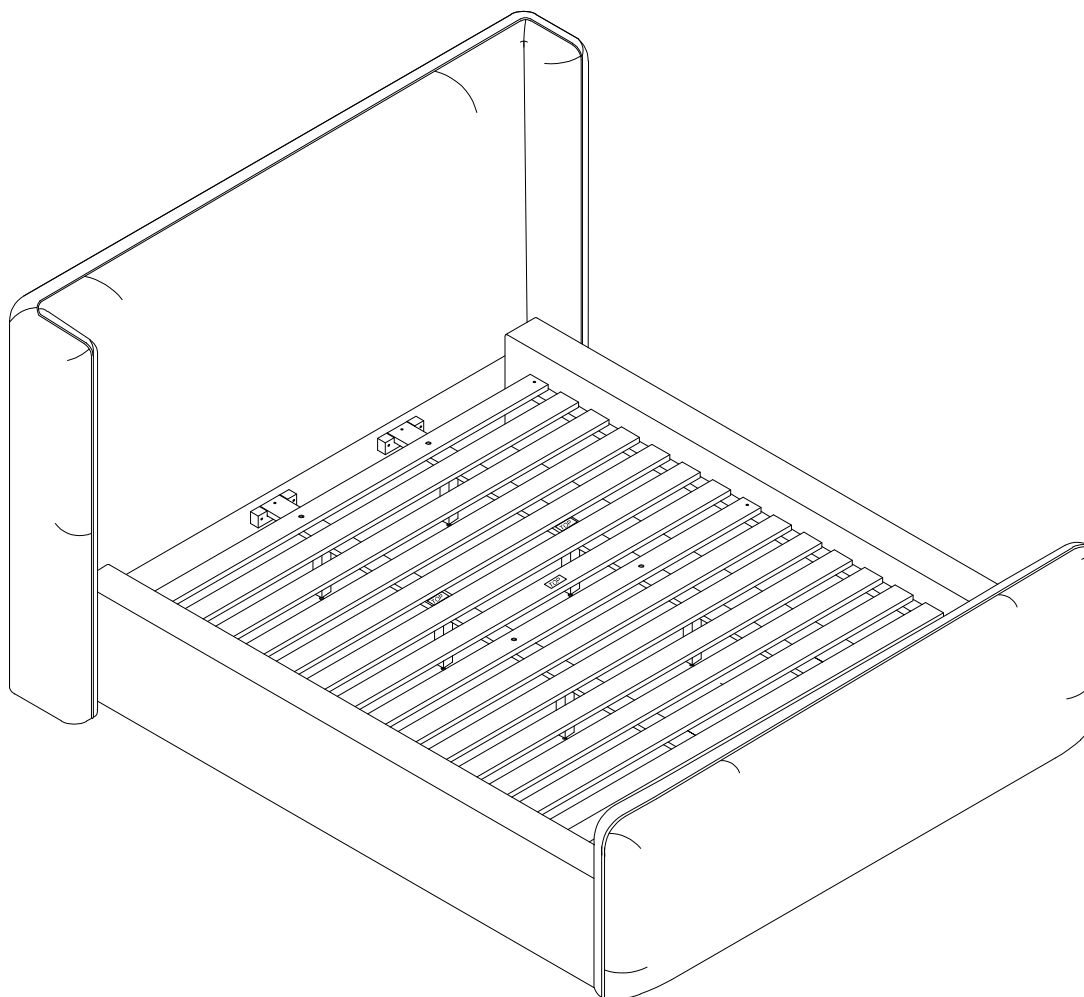


ASSEMBLY COMPLETE

INSTRUCTIONS FOR ADJUSTING LEVELERS:

Position the bed in your space and locate the leveler under each support leg.

Turn the leveler counter-clockwise to extend the leveler and clockwise to retract it.

Adjust each leveler until each support leg is applying equal, upward pressure on the support slat.



MAINTENANCE INSTRUCTIONS:

- Periodically check all fittings and tighten if necessary, as they can loosen over time.
- Always remove box spring and mattress before moving the bed.
- Lift the bed when moving it. Dragging the bed can damage the center support.
- Readjust levelers after moving the bed.

BACALL UPHOLSTERED C.KING PLATFORM BED

ASSEMBLY INSTRUCTIONS



APPENDIX A: ADJUSTABLE MATTRESS BASE ASSEMBLY SUPPLEMENT

AN ADJUSTABLE MATTRESS BASE IS A FREESTANDING MATTRESS SUPPORT THAT SITS WITHIN THE PERIMETER OF THE BED FRAME.

IF USING THIS BED FRAME WITH A STANDARD BOX SPRING OR FOUNDATION THESE INSTRUCTIONS DO NOT APPLY.


PRE-ASSEMBLED SIDE RAIL CLEATS OBSTRUCT ADJUSTABLE BASE INSTALLATION AND OPERATION. FOLLOW THESE INSTRUCTIONS TO REMOVE THEM.

THE FOLLOWING PARTS ARE NOT REQUIRED FOR ADJUSTABLE MATTRESS BASE INSTALLATION:

C. SLAT ROLL	1 SET
D. CENTER SLAT SUPPORT CLEAT	4 PCS
F. CENTER SLAT SUPPORT	2 PCS
G. SUPPORT LEG	8 PCS

STEP 1:

USE ALLEN KEY (10) TO UNSCREW ALLEN BOLTS AND REMOVE PRE-ASSEMBLED SIDE RAIL CLEATS.

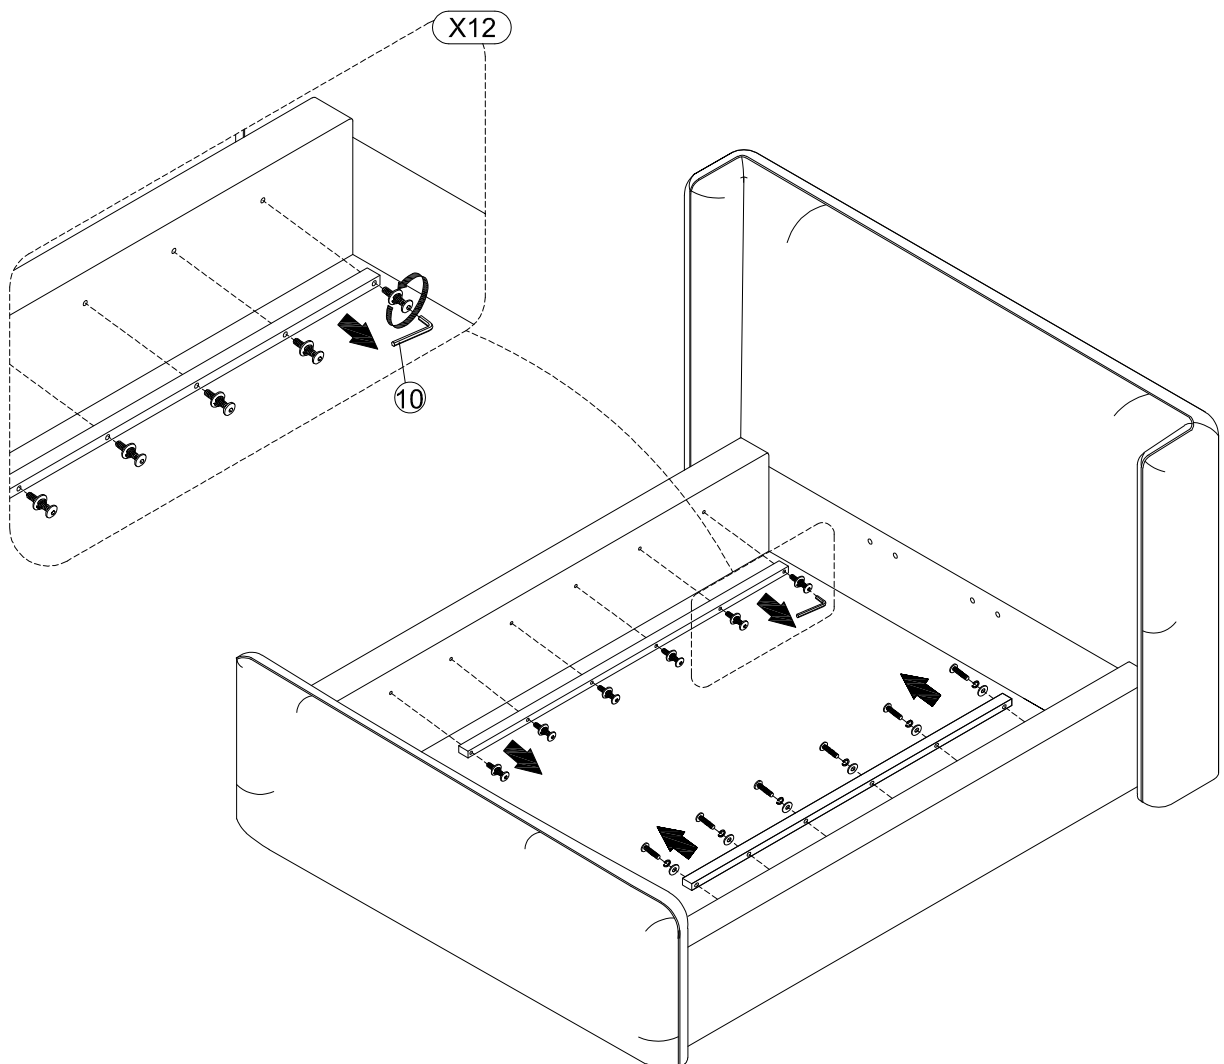

NOTE: YOU MAY WISH TO RETAIN UNUSED PARTS IF IN THE FUTURE YOU INTEND TO USE THE BED FRAME WITH A STANDARD BOX SPRING OR FOUNDATION

BACALL UPHOLSTERED FULL PLATFORM BED


ASSEMBLY INSTRUCTIONS



BOX#1

A. HEADBOARD

1 PC

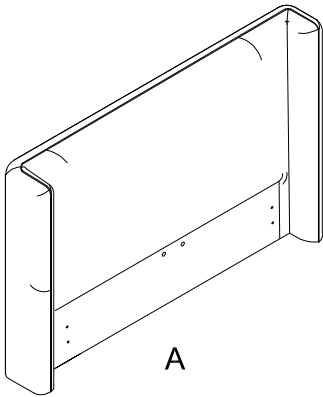

A

BOX#2

B. FOOTBOARD


1 PC

C. SLAT ROLL


1 SET

D. CENTER SLAT SUPPORT CLEAT

2 PCS



B

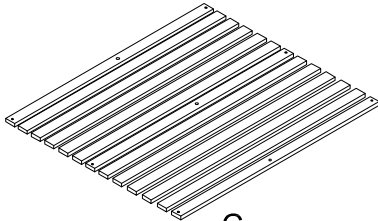

C



D

BOX#3

E. SIDE RAIL


2 PCS

F. CENTER SLAT SUPPORT


1 PC

G. SUPPORT LEG

4 PCS



E



F





G

HARDWARE KIT PACKED IN BOX #2

No.	Description	Image	Quantity
1	THREADED BOLT (5/16"x 3-1/2")		8 PCS
2	ALLEN BOLT (5/16"x 2-1/2")		4 PCS
3	ALLEN BOLT (1/4"x 1-1/4")		3 PCS
4	FLAT WASHER (5/16")		12 PCS
5	FLAT WASHER (1/4")		3 PCS
6	LOCK WASHER (5/16")		12 PCS
7	LOCK WASHER (1/4")		3 PCS
8	HEX NUT (5/16")		8 PCS
9	PHILLIPS SCREW (M4 x 32mm)		8 PCS
10	ALLEN KEY (5/16")		1 PC
11	WRENCH		1 PC
12	CONNECTING BRACKET		4 PCS

FULLY ASSEMBLED

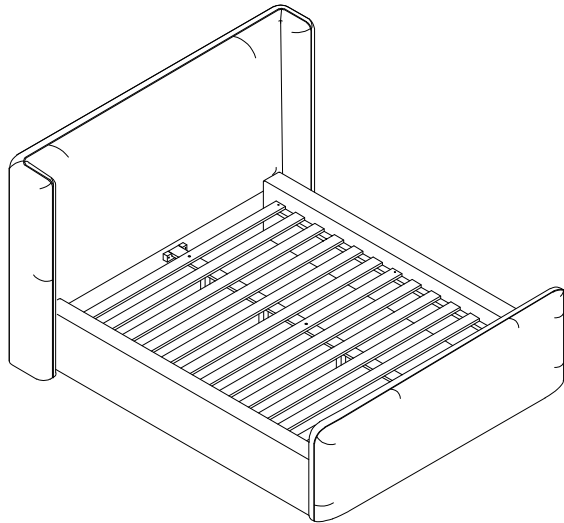


BACALL UPHOLSTERED FULL PLATFORM BED


ASSEMBLY INSTRUCTIONS




STEP 1:

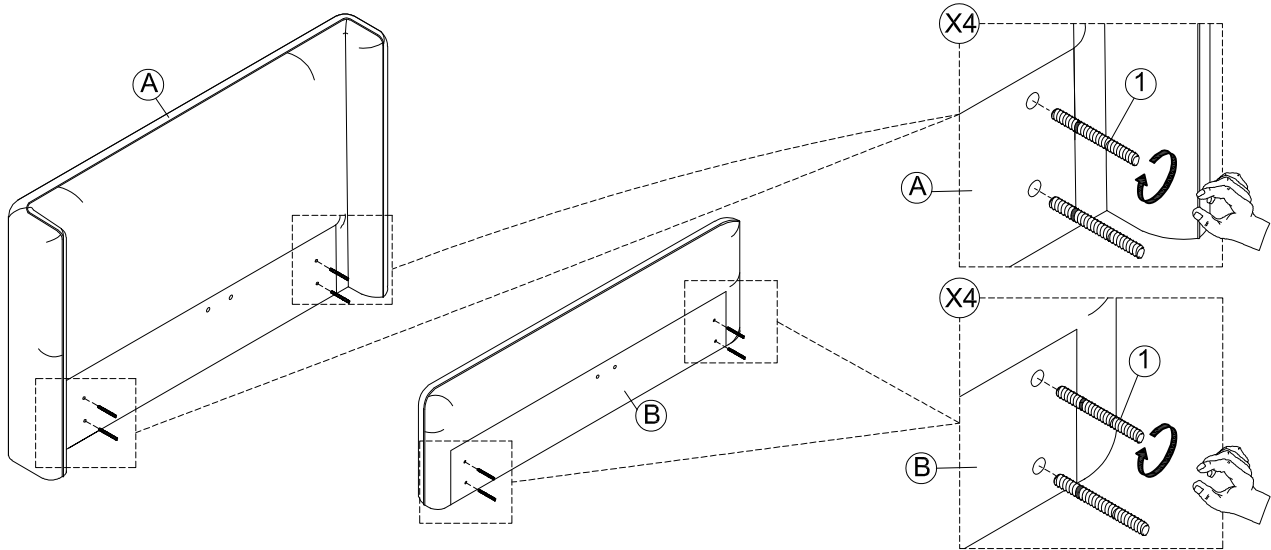

STEP 2:

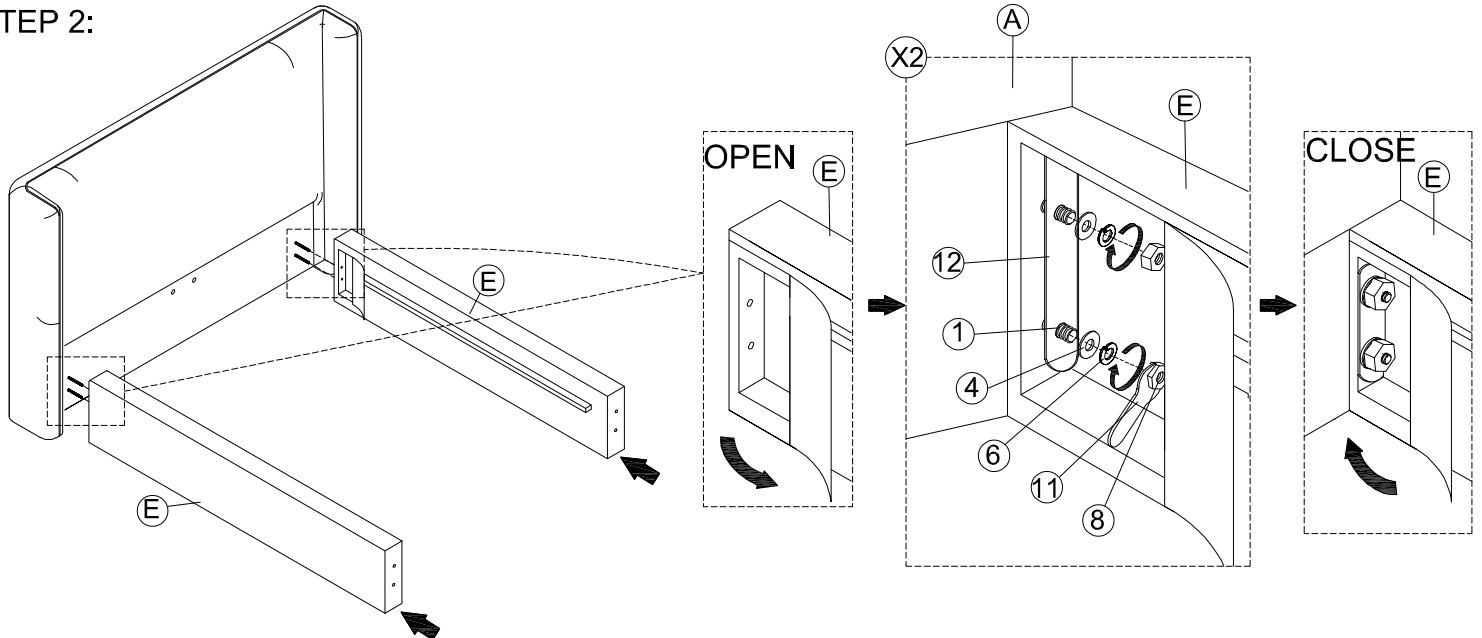

STEP 3:

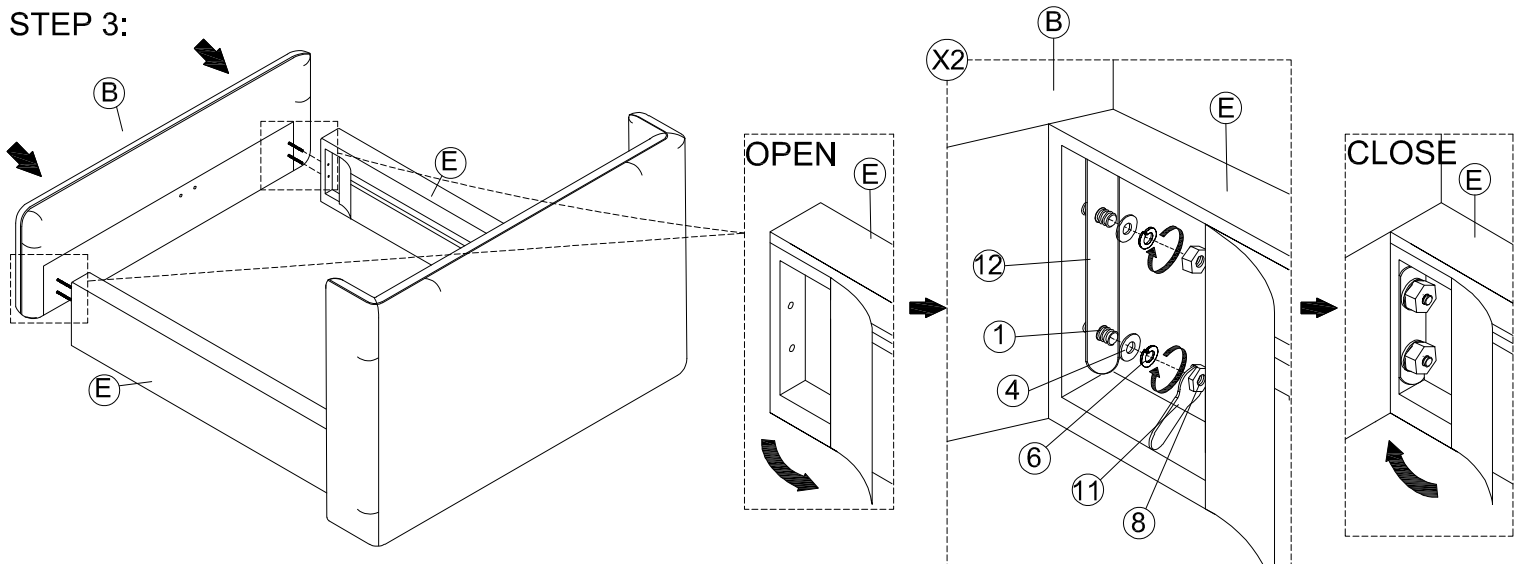

STOP


- IF USING BED WITH AN ADJUSTABLE MATTRESS BASE, SKIP STEPS 4-8 AND REFERENCE APPENDIX A: ADJUSTABLE MATTRESS BASE ASSEMBLY SUPPLEMENT.
- IF USING BED FRAME WITH STANDARD BOX SPRING OR FOUNDATION, CONTINUE TO STEP 4

BACALL UPHOLSTERED FULL PLATFORM BED


ASSEMBLY INSTRUCTIONS




STEP 4:

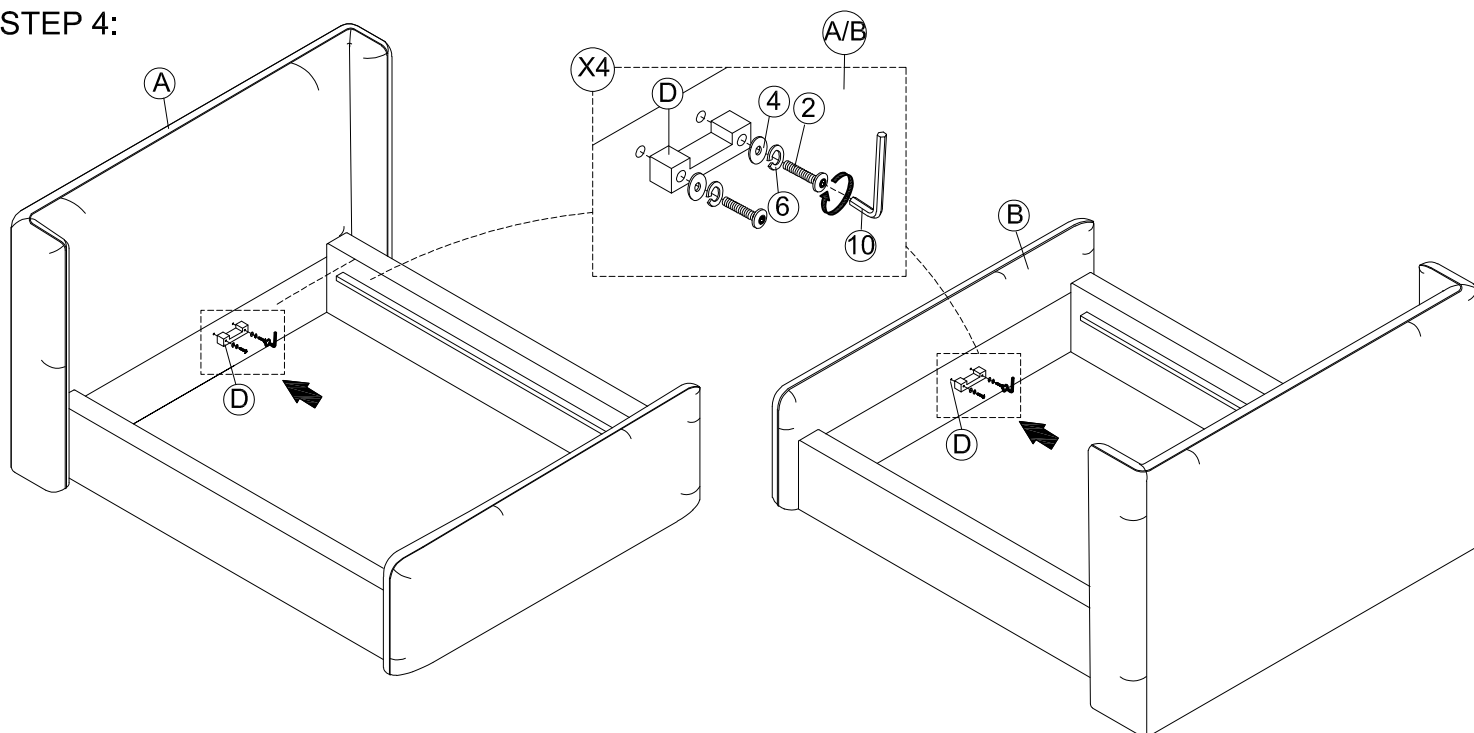

STEP 5:

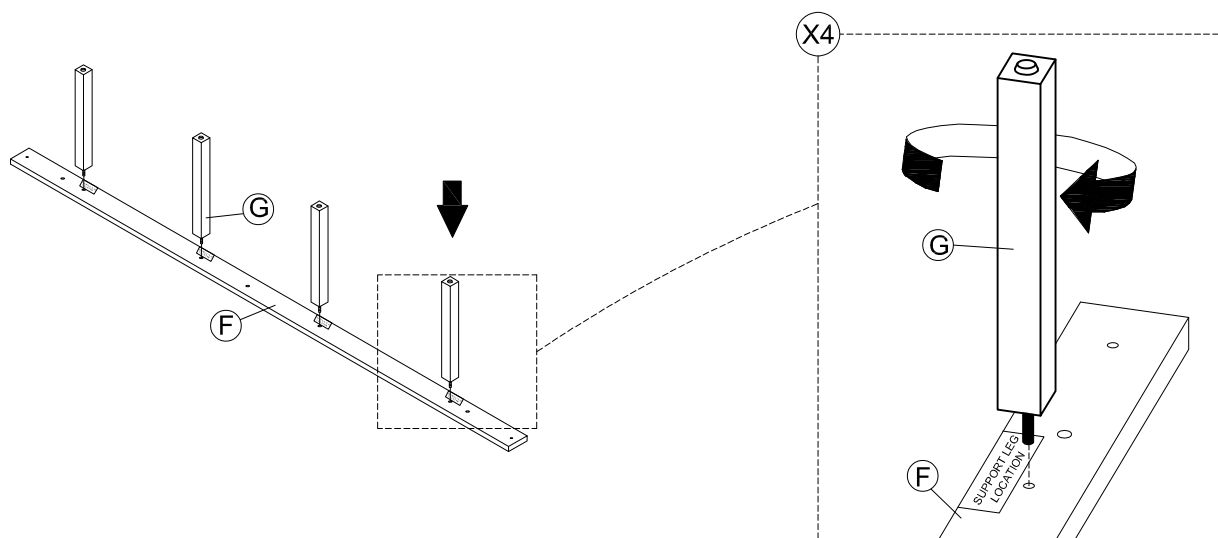

STEP 6:

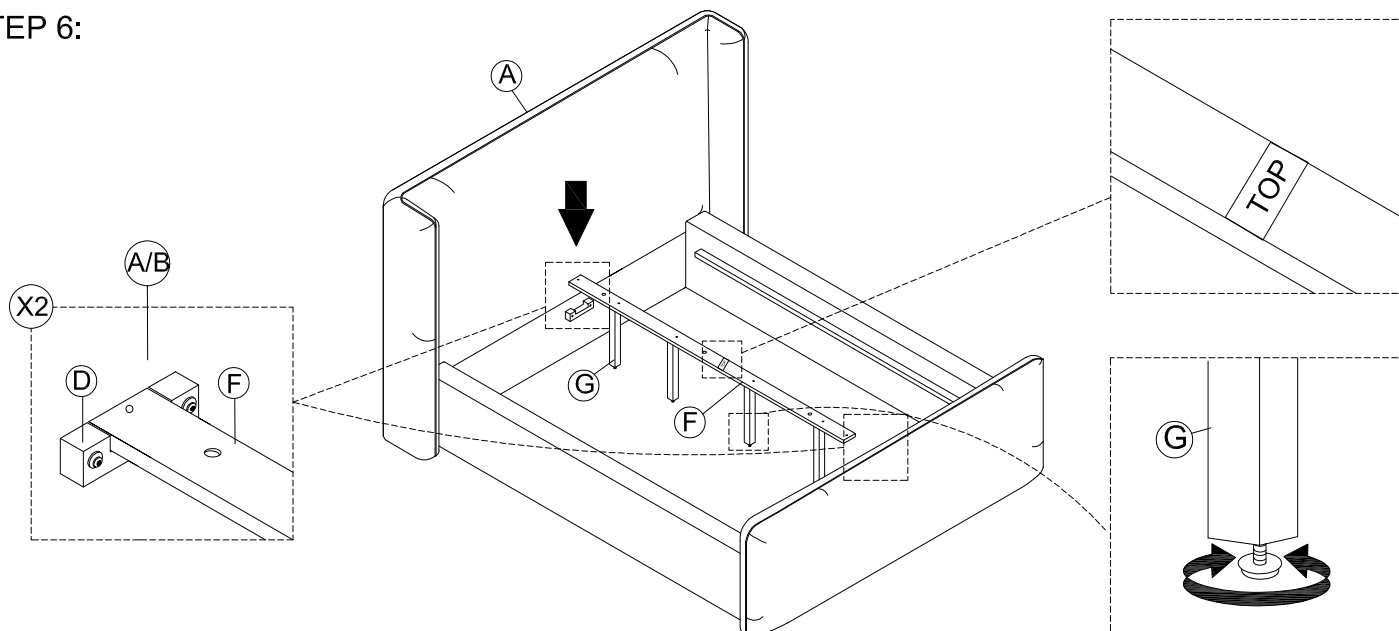


BACALL UPHOLSTERED FULL PLATFORM BED


ASSEMBLY INSTRUCTIONS



STEP 7:

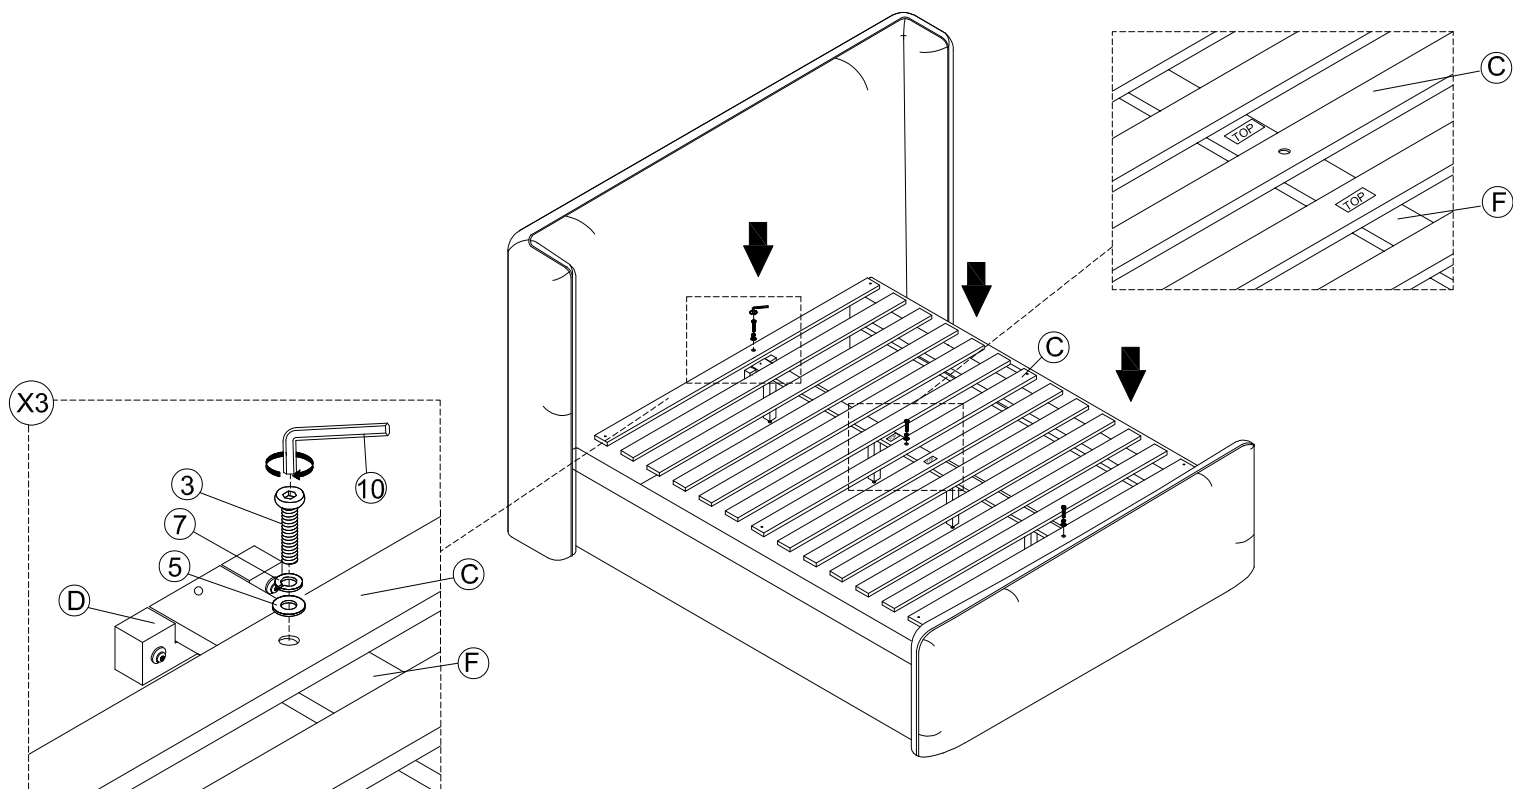


STEP 8:

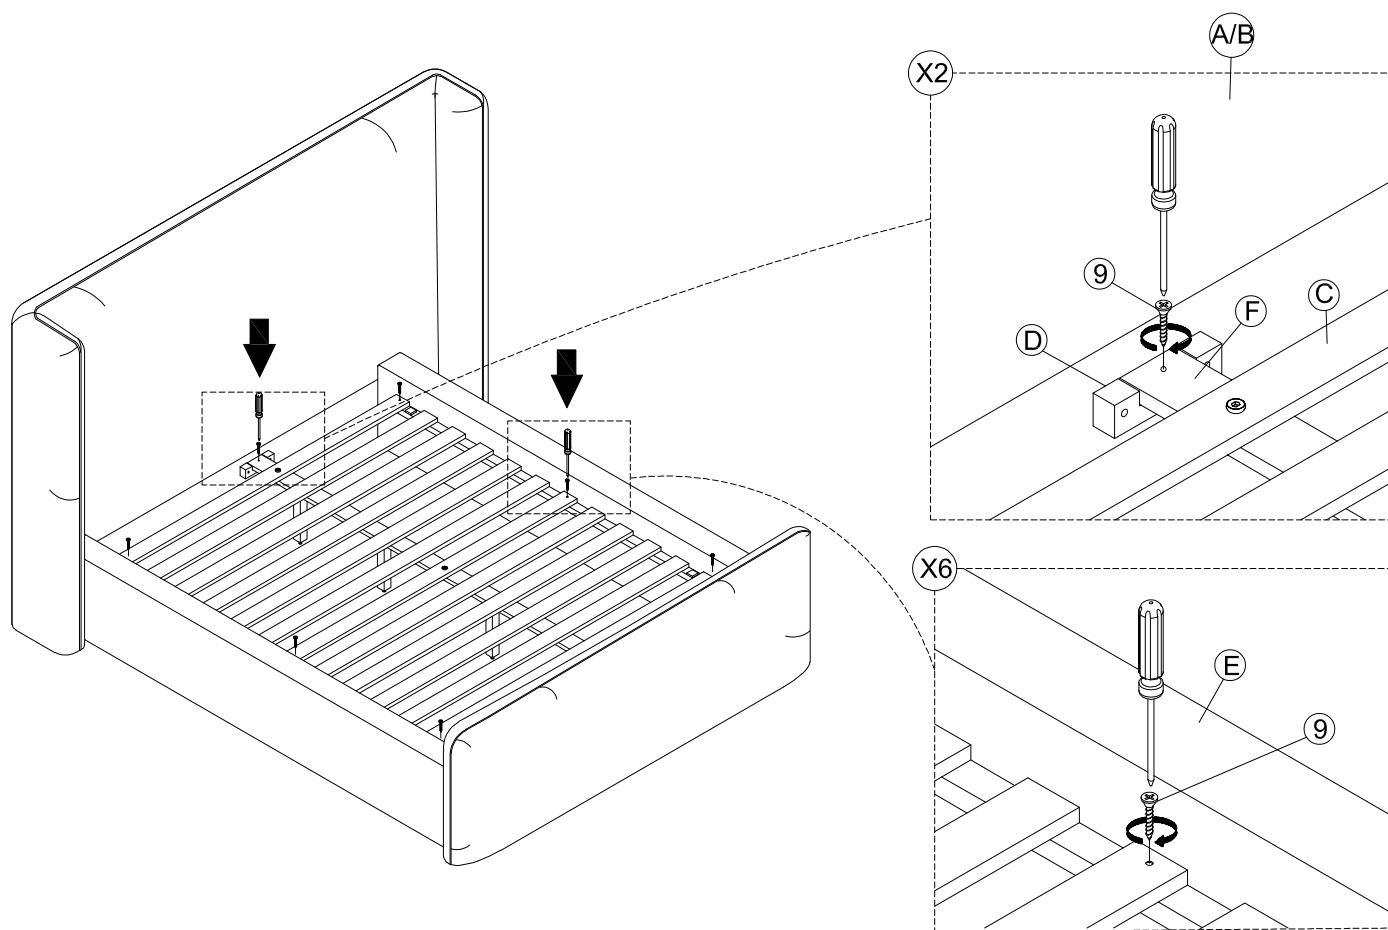

BACALL UPHOLSTERED FULL PLATFORM BED

ASSEMBLY INSTRUCTIONS

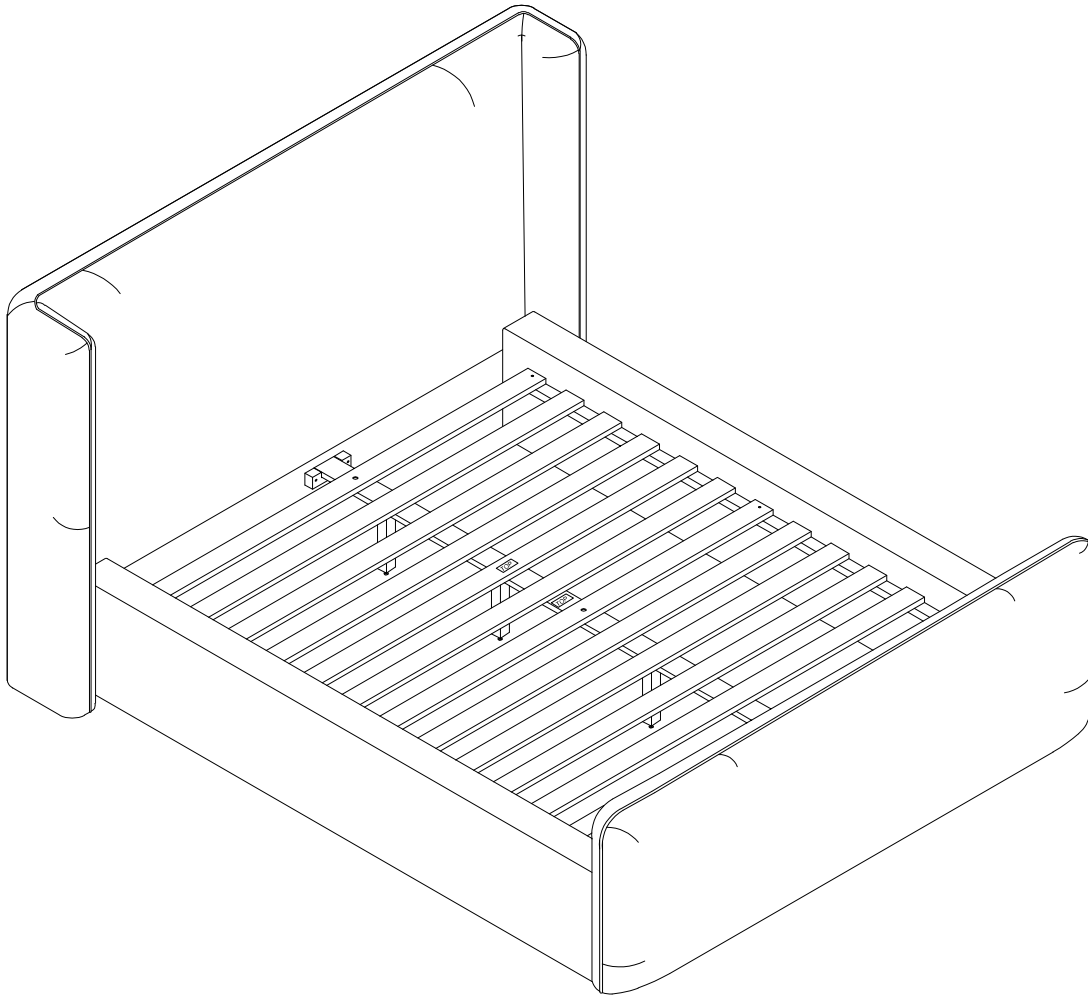


ASSEMBLY COMPLETE

INSTRUCTIONS FOR ADJUSTING LEVELERS:

Position the bed in your space and locate the leveler under each support leg.

Turn the leveler counter-clockwise to extend the leveler and clockwise to retract it.

Adjust each leveler until each support leg is applying equal, upward pressure on the support slat.



MAINTENANCE INSTRUCTIONS:

- Periodically check all fittings and tighten if necessary, as they can loosen over time.
- Always remove box spring and mattress before moving the bed.
- Lift the bed when moving it. Dragging the bed can damage the center support.
- Readjust levelers after moving the bed.

BACALL UPHOLSTERED FULL PLATFORM BED

ASSEMBLY INSTRUCTIONS



APPENDIX A: ADJUSTABLE MATTRESS BASE ASSEMBLY SUPPLEMENT

AN ADJUSTABLE MATTRESS BASE IS A FREESTANDING MATTRESS SUPPORT THAT SITS WITHIN THE PERIMETER OF THE BED FRAME.

IF USING THIS BED FRAME WITH A STANDARD BOX SPRING OR FOUNDATION THESE INSTRUCTIONS DO NOT APPLY.


PRE-ASSEMBLED SIDE RAIL CLEATS OBSTRUCT ADJUSTABLE BASE INSTALLATION AND OPERATION. FOLLOW THESE INSTRUCTIONS TO REMOVE THEM.

THE FOLLOWING PARTS ARE NOT REQUIRED FOR ADJUSTABLE MATTRESS BASE INSTALLATION:

C. SLAT ROLL	1 SET
D. CENTER SLAT SUPPORT CLEAT	2 PCS
F. CENTER SLAT SUPPORT	1 PC
G. SUPPORT LEG	4 PCS

STEP 1:

USE ALLEN KEY (10) TO UNSCREW ALLEN BOLTS AND REMOVE PRE-ASSEMBLED SIDE RAIL CLEATS.

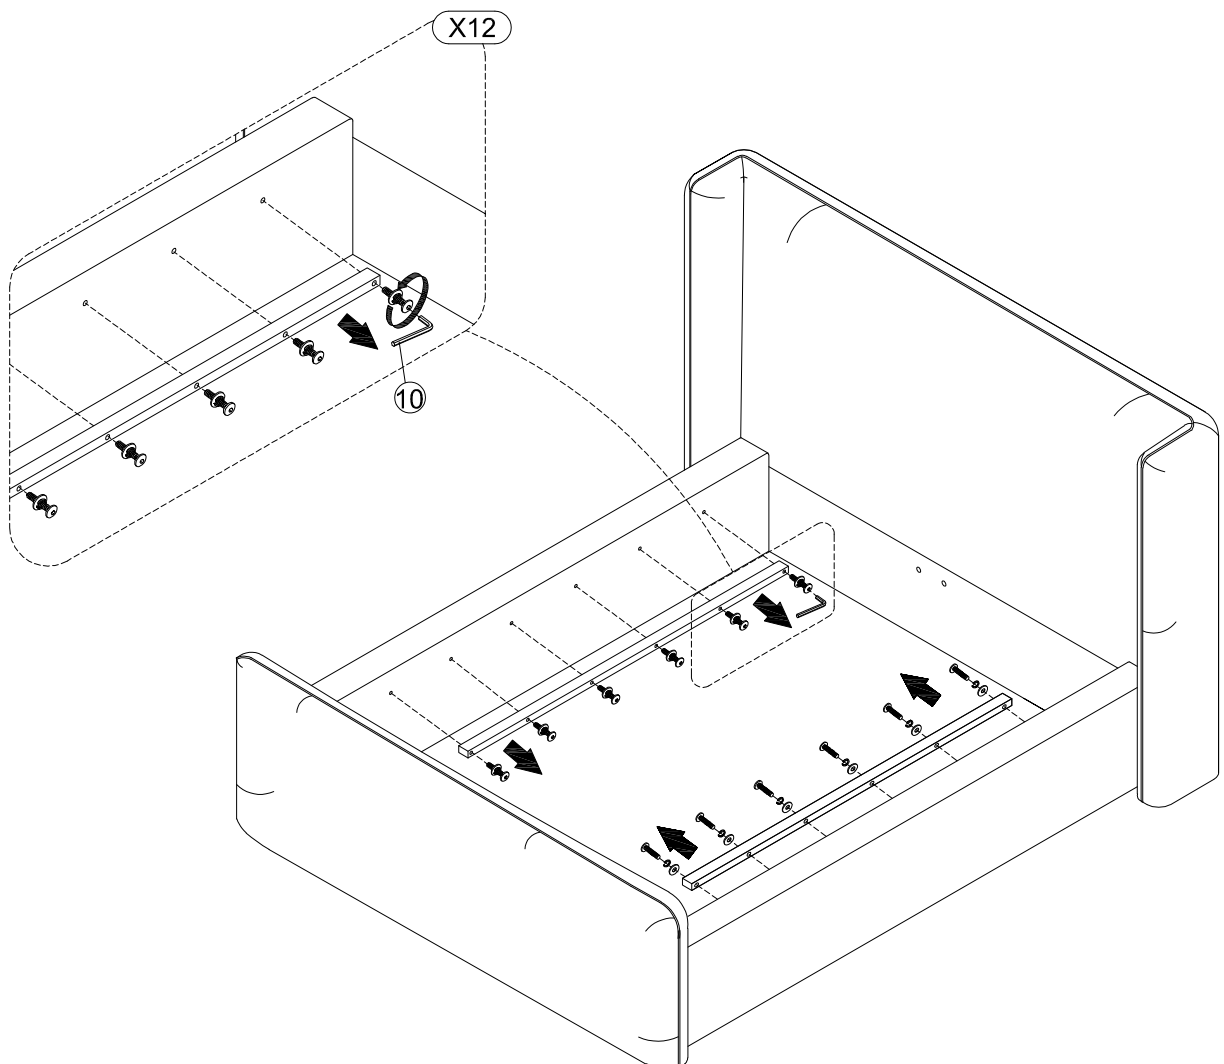

NOTE: YOU MAY WISH TO RETAIN UNUSED PARTS IF IN THE FUTURE YOU INTEND TO USE THE BED FRAME WITH A STANDARD BOX SPRING OR FOUNDATION