

EXL2v3

LED Edge Lit Exit Sign

Product Description

The EXL2v3 LED Edge Lit Exit Series features a contemporary design with ease of installation in mind. The pivoting driver case allows for wall, ceiling, stairwell, or end-mount installation all in one, dependable package. Constructed of impact-resistant acrylic, choose from a clear single-faced panel or a mirrored universal panel. High output LEDs deliver an indirect, evenly illuminated edge-lit exit sign with exceptional light distribution and a maintenance-free nickel-cadmium battery for long life. The EXL2v3 Series also offers field adjustable chevrons for universal configuration based on your application's directional needs.

Construction

- ABS plastic housing
- Driver case pivots $\pm 90^\circ$ around center for wall, ceiling, and stairwell installation
- Impact resistant acrylic panel
- Single face clear panel
- Universal face mirror panel. Ships as a single face, but removal of adhesive cover will allow for double face applications.

Electrical

- LED light engine provides consistently bright, even EXIT legend illumination
- Maintenance-free NiCad battery provides 90-minute emergency operation
- 120-277 VAC
- Fully-illuminated 6" letter height with 3/4" stroke
- Convenient button allows selection of red or green LED lettering
- LED Indicator Light & Self-Test Push Button Switch
- Damp Location Rated
- Operating temperature: 32°F - 104°F (0°C - 40°C)

Mounting & Installation

- Mounting plate allows for J box mounting with ceiling, wall or end-mount applications
- Field-installable, removable chevron directional indicators (with mounting template) for all configurations
- For installations where power surge may be possible, NICOR recommends installing additional surge protection at the electrical distribution panel

Finish

- Silver finished housing
- Available with clear (single faced) or mirrored backing (single or double face)

Listings

- UL Listed
- Meets or exceeds requirements of NFPA 70 & NFPA 101
- Meets FCC Part 15, Subpart B, Class B standards for conducted and radiated emissions

Warranty

- 1-year limited system warranty standard
- Warranty does not cover product failure due to an overvoltage event (power surge)

Product Information

Input Voltage: 120-277VAC, 60Hz

Power Draw: 2W

Accessories


Recess Installation Kit EXL2RECESSKIT

Project

Catalog

Type

Date

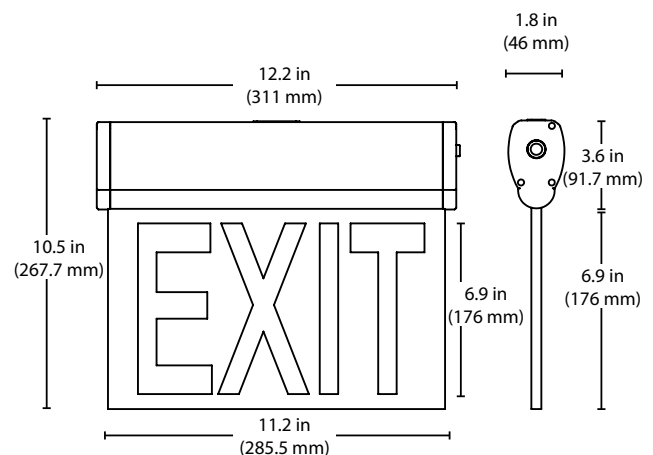

Ordering Information

Example: EXL23UNVCLSSV

Series	Version/Voltage	Legend Background	Number of Sides	Letter Color	Housing Color
EXL2	3UNV (Version 3, 120-277V)	CL (Clear)	S (Single - Clear Only)	S (Selectable Red/Green)	SV (Silver)
		MR (Mirrored)	U (Universal - Mirror Only)		WH (White) ¹

Specifications and dimensions subject to change without notice

1: Contact factory for MOQ and lead time