



# MINI-SPLIT

## LINE SET COVER KITS & ACCESSORIES

### LINE SET COVER KITS

#### 12' LINE SET COVER KIT | PROLSKIT-12

Typically used with 15' line set installations



##### 12' KIT INCLUDES:

- 3 × Ducts (47.25" Ea.)
- 1 × Wall Outlet
- 1 × Flat Elbow
- 1 × End Cap
- 2 × Couplers
- 1 × Accessory Parts



#### FEATURES

- Protect and hide mini split system refrigerant lines
- Ultra-durable, easy to install, lightweight, and weatherproof
- Can be installed over existing pre-installed pipes
- Color - white (paintable)

#### 20' LINE SET COVER KIT | PROLSKIT-20

Typically used with 25' line set installations




##### 20' KIT INCLUDES:

- 5 × Ducts (47.25" Ea.)
- 1 × Wall Outlet
- 1 × Flat Elbow
- 1 × End Cap
- 4 × Couplers
- 1 × Accessory Parts



### ACCESSORIES

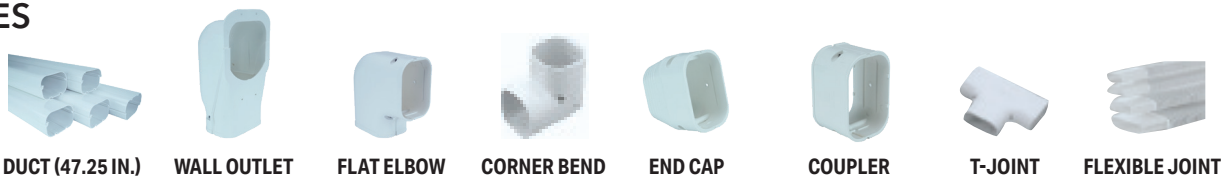

	DUCT (47.25 IN.)	WALL OUTLET	FLAT ELBOW	CORNER BEND	END CAP	COUPLER	T-JOINT	FLEXIBLE JOINT
	PROLSDUCT47-3	PROLSOUTLET-3	PROLSELBOW-3	PROLSBEND-3	PROLSCAP-3	PROLSCOUPLING-3	PROLST-3	PROLSFLEX-3
PKG. DIMENSIONS (W×H×D) (in.)	4 × 2.75 × 47.25	4.5-5 × 3-3.25 × 9	4 × 3 × 6	3 × 4.25 × 4.5	2.25 × 3 × 4.5	4.5 × 3 × 2.5	3 × 4.5 × 9.25	3.5 × 4 × 2.5
MASTER PACK QUANTITY	6	50	63	78	150	180	42	24



# MINI-SPLIT

## QUICK START INSTALLATION KIT & ACCESSORIES

### QUICK START INSTALLATION KIT | PA-MSK001

- For Single-Zone and Multi-Zone Condensers
- Surge protection

*Sold as kit only - products not sold separately.*

**PA-MSK001**

**PKG. DIMENSIONS (W×H×D) (in.)**

11.5 × 11.5 × 7

**MASTER PACK QUANTITY**

1



#### DISCONNECT BOX

- 60 amp non-fused metallic
- Non-fused pullout
- Rated NEMA 3R for outdoor use
- Line, load, and ground terminals aligned for easy hook up with heavy wires
- Full dead front
- Rear, bottom and side entry knockouts
- Heavy gauge steel case
- Large internal wiring space



#### DITEK SURGE PROTECTOR

- Weatherproof enclosure
- Parallel connection for easy installation
- Diagnostic LED provides positive indication of power, ground presence, and surge protection
- Auto-resets to handle multiple surge events
- Typical applications: A/C disconnect, small electrical panels, pool/well pumps
- Half the response time as similar models



#### ELECTRICAL WHIP

- One ½" diameter × 4' long liquid tight conduit
- Three #10 THHN conductors
- One straight and one 90° non-metallic connector
- Two ¾" and ½" reducing washers



#### WALL SLEEVE

- Telescopic from 5" to 7¾" long
- 3" outside diameter
- 2⅞" interior diameter



#### VALVE ADAPTER

- Converts the ⅝" SAE charging vacuum ports to accept ¼" SAE gauge hose set

#### KIT INCLUDES:



### ADDITIONAL ACCESSORIES



#### ECOPAD™ PLASTIC EQUIPMENT PAD

**EP1838-3**



#### 17" HEF-T-BLOCK MOUNTING BLOCKS (Quantity of 2 per box)

**230-MB17W**



#### MINI-SPLIT STAND (Holds up to 400 lbs.)

**QSMS1801**



#### MINI-SPLIT CONDENSER MOUNTING BRACKET

**MA-SB35**

**PKG. DIMENSIONS (W×H×D) (in.)**

38 × 3 × 18

5 × 19 × 8.5

19 × 3 × 34

33.25 × 2.75 × 3.25

**MASTER PACK QUANTITY**

1

1

1

1