

Location:



4206-TRM, 4206TRMTC
Tub/Shower/Hand Shower Trim
Specification Submittal




<h3>Feature Highlights</h3> <ul style="list-style-type: none"> Oxford Tub/Shower/Hand Shower Trim Requires Temptrol® Pressure Balancing Tub/Shower Valve Requires Symmons Triple Outlet Diverter Valve Metal lever handles Cradle for hand shower wand 5-7/8" non-diverter tub spout Dual checks for backflow protection 60" flexible metal hose 1 mode hand shower wand 1 mode showerhead Standard 2.0 gpm (7.6 L/min) flow restrictor Components shall be metal and nonmetallic construction, plated in standard Polished Chrome finish Available with TA-10 flow control spindle and T-12A cap assembly for Temptrol valve bodies installed with Test Cap (order p/n 4206TRMTC) For optional in-line vacuum breaker order p/n EF-109 	<h3>Options/Modifications</h3> <ul style="list-style-type: none"> <input type="checkbox"/> 1.5  1.5 gpm (5.7 L/min) flow restrictor <input type="checkbox"/> L1 Less showerhead <input type="checkbox"/> L5 Less hand shower system (less bar/cradle, hose, wand, elbow) <input type="checkbox"/> L6 Less tub spout <input type="checkbox"/> L7 Less handle <input type="checkbox"/> STN Satin Nickel finish <p>Note: Append appropriate -suffix to model number.</p>
<h3>Model Numbers</h3> <ul style="list-style-type: none"> <input type="checkbox"/> 4206-TRM Tub/Shower/Hand Shower Trim, Temptrol Pressure Balancing Tub/Shower Valve and Symmons Triple Outlet Diverter valve ordered separately <input type="checkbox"/> 4206TRMTC Tub/Shower/Hand Shower Trim with TA-10 flow control spindle and T-12A cap assembly, must order Temptrol valve with Test Cap 	<h3>Warranty</h3> <p>Limited Lifetime - to the original end purchaser in consumer/residential installations.</p> <p>10 Years - for commercial/industrial installations. Refer to www.symmons.com/warranty for complete warranty information.</p> 
<h3>Compliance</h3> <ul style="list-style-type: none"> ASME A112.18.1/CSA B125.1 	

Architectural/Engineering Specification

Symmons Oxford Tub and Shower and Hand Shower Trim _____ Includes Oxford Tub and Shower and Hand Shower Trim, Requires Temptrol® Pressure Balancing Tub and Shower Valve, Requires Symmons Triple Outlet Diverter Valve, Metal lever handles, Cradle for hand shower wand, 5-7/8" non-diverter tub spout, Dual checks for backflow protection, 60" flexible metal hose, 1 mode hand shower wand, 1 mode showerhead, Standard 2.0 gpm (7.6 L/min) flow restrictor, Components shall be metal and nonmetallic construction, plated in standard Polished Chrome finish, Available with TA-10 flow control spindle and T-12A cap assembly for Temptrol valve bodies installed with Test Cap (order p/n 4206TRMTC), For optional in-line vacuum breaker order p/n EF-109. 10 Year Commercial Warranty. ASME A112.18.1/CSA B125.1 compliant. Available options: "1.5 - 1.5 gpm (5.7 L/min) flow restrictor", "L1 - Less showerhead", "L5 - Less hand shower system (less bar/cradle, hose, wand, elbow)", "L6 - Less tub spout", "L7 - Less handle", "STN - Satin Nickel finish".

Dimensions

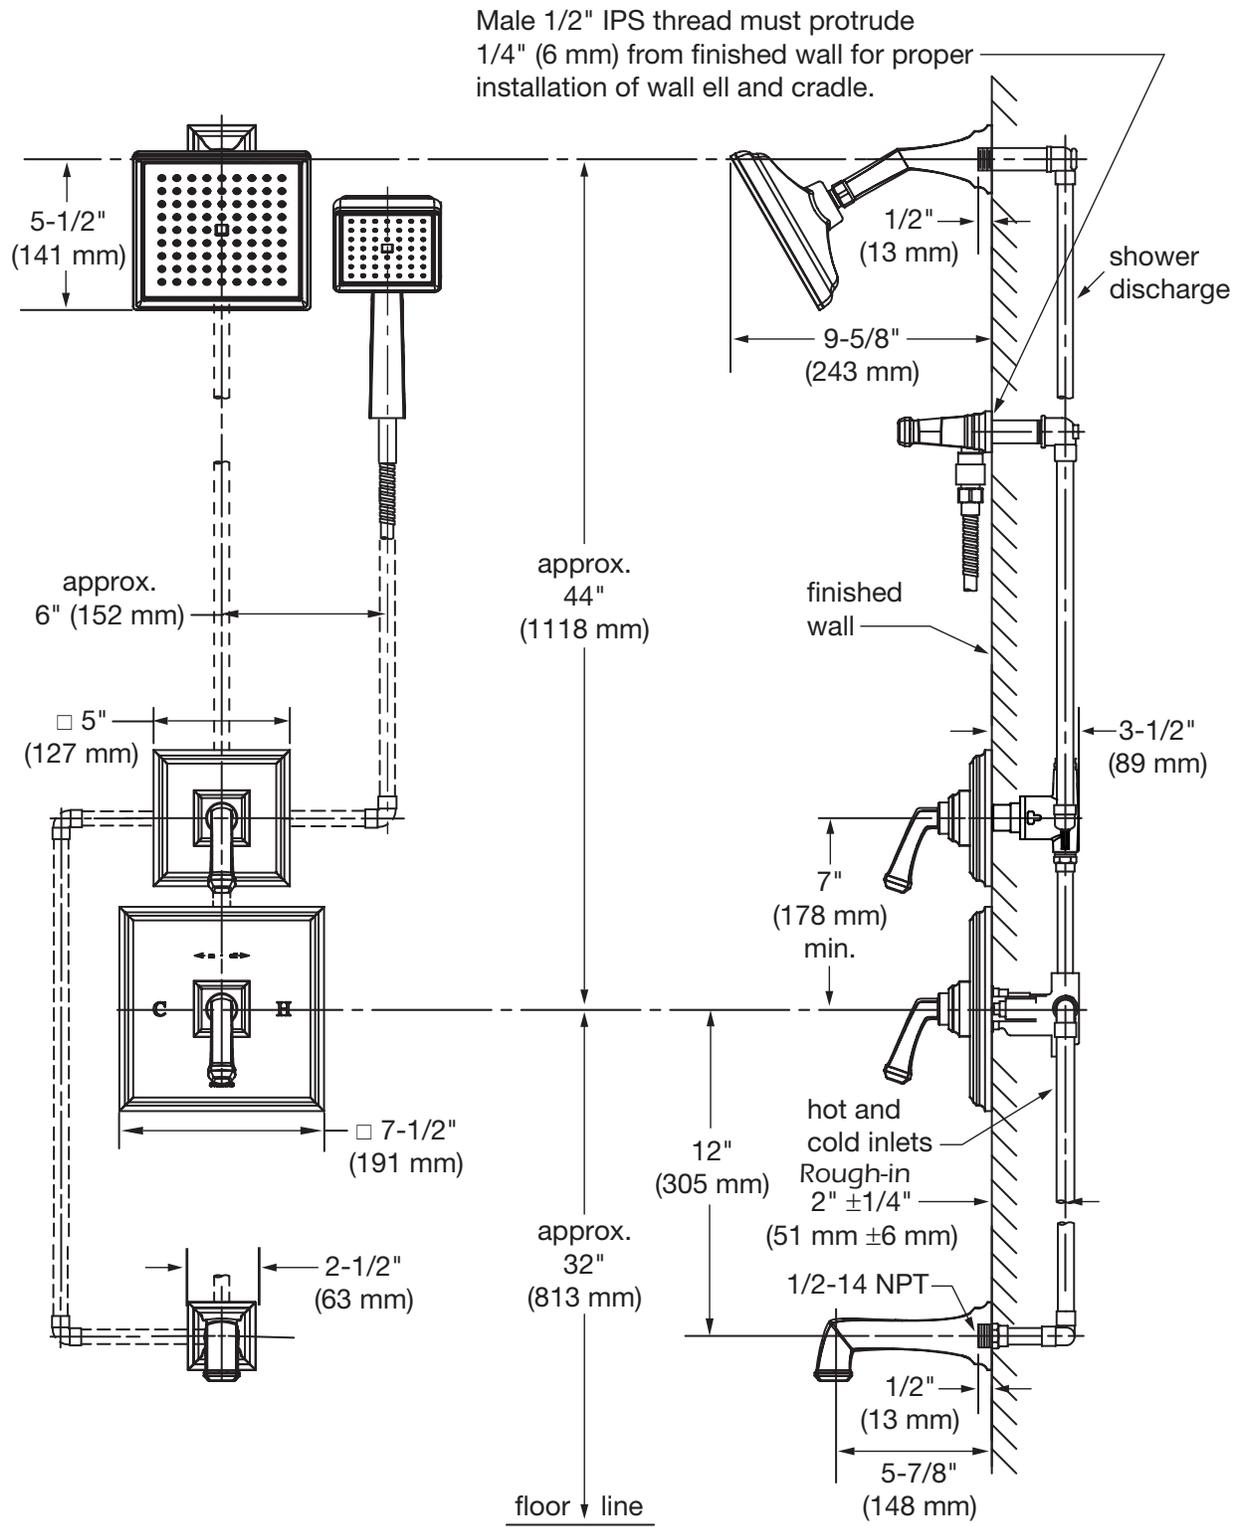

Notes:

- 1) Valve body and piping not included and shown as reference only.
- 2) Plaster shield (p/n T-176) for dry wall, plaster or other type walls 1/2" or greater.
- 3) All dimensions measured from nominal rough-in.
- 4) Dimensions subject to change without notice.