

FLOOR / WALL

RESIDENTIAL

COMMERCIAL

INDOOR

OUTDOOR

POOL A



Apex



Cliff



Crest



Product and Installation Details | ANSI A108.02 Section 4.3.8.2 - For running bond/brick joing patterns utilizing tiles (square or rectangular) where the side being offset is greater than 18" (nominal dimension), the running bond offset will be a maximum of 35% unless otherwise specified by the tile manufacturer. If an offset greater than 33% is specified, specifier and owner must approve mock-up and lippage.





Red List Free

- V
- Health Product Declaration (HPD) provide
- *For more information visit www.emser.com. Always consult a professional for proper usage and installation.





FLOOR / WALL

RESIDENTIAL

COMMERCIAL

INDOOR

OUTDOOR

POOL



Ardor



Fervor



Honor



Rigor



Valor

Sizes		6"×35" 5.91"×35.43"					
Thickness		10mm					
Faces		10					
Finish		Matte					
Edge		Pressed					
Grout Joint Recommendation		3/16"					
Testing	Abrasion Resistance C1027	Breaking Strength C648	Chemical Resistance C650	Water Absorption C373	DCOF ANSI A137.1	Scratch Hardness MOHS	Shade Variation Rating
Results*	III IV (Ardor)	>250 lbf	Resistant	<0.5%	>0.60	7	V2
Sustainability Att							

Product and Installation Details | ANSI A108.02 Section 4.3.8.2 - For running bond/brick joing patterns utilizing tiles (square or rectangular) where the side being offset is greater than 18" (nominal dimension), the running bond offset will be a maximum of 33% unless otherwise specified by the tile manufacturer. If an offset greater than 33% is specified, specifier and owner must approve mock-up and lippage.





- Red List Free
- Health Product Declaration (HPD) provided upon reques
- Product Packaging is 100% recyclable

Banzai[™] porcelain tile features the highly coveted wood look perfect for those who love design – from modern to classic cottage, and all styles in-between. Banzai is available in 6"x35" planks with five wood-looks.

BANZAITM Glazed Porcelain























Krix Corner



Sizes	8"x8" 7.87"x7.87"	9"x11" 9.17"x10.55"					
Thickness	8mm	9mm					
Faces	10	10 15 (Floral)					
Finish	Matte	Matte					
Edge	Rectified	Pressed					
Grout Joint Recommendation	1/8"	1/8"					
Testing	Abrasion Resistance C1027	Breaking Strength C648	Chemical Resistance C650	Water Absorption C ₃₇₃	DCOF ANSI A137.1	Scratch Hardness MOHS	Shade Variation Rating
Results*	III	>350 lbf (8x8) >375 lbf (Hex)	Resistant	<0.50%	>0.55 (8x8) >0.60 (Hex)	6	V1 V2 (Solid Hex)



Ded List Free

- · ·
- Product Packaging is 100% recyclable

Bauhaus honors a design movement that continues to inspire today. The collection stresses the inherent beauty in geometry and simplicity, as well as the importance of quality materials. Subtle color gradiations draw the eye and create a unique visual experience, whether on walls or on floors.

BAUHAUS

Glazed Porcelain








Nasser



Tahoe

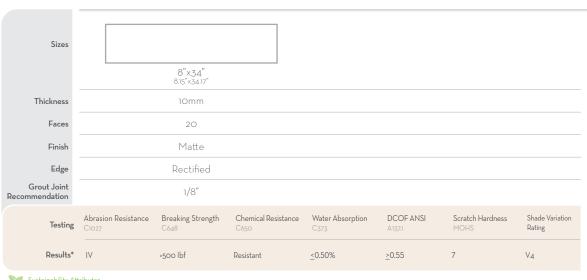

Product and Installation Details | ANSI A108.02 Section 4.3.8.2 - For running bond/brick joing patterns utilizing tiles (square or rectangular) where the side being offset is greater than 18" (nominal dimension), the running bond offset will be a maximum of 33% unless otherwise specified by the tile manufacturer. If an offset greater than 33% is specified, specifier and owner must approve mock-up and lippage.






Beach Wood™ breathes life into contemporary surfaces in the form of wood look panels. Beach Wood™ consists of distinct wooden tones which evoke rich detail and texture across a variety of faces.

BEACH WOOD™

Glazed Porcelain



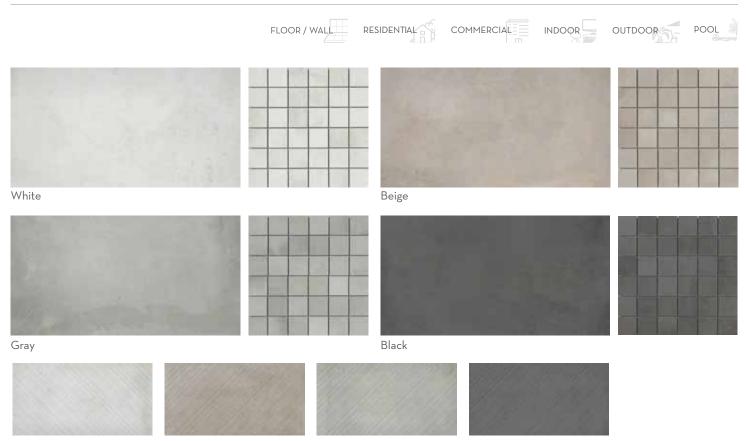


Diagonal Pattern Available in 18"x35" Only | Left & Right Styles Available



Beige, Gray, and White Bush Hammered

Available in Size 24"x24." MOQ and lead times apply. Consult your local rep for more information.

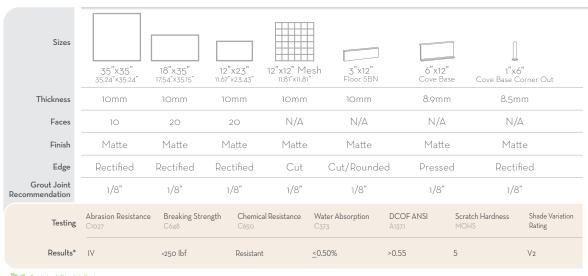

Product and Installation Details | ANSI A108.02 Section 4.3.8.2 - For running bond/brick joing patterns utilizing tiles (square or rectangular) where the side being offset is greater than 18" (nominal dimension), the running bond offset will be a maximum of 33% unless otherwise specified by the tile manufacturer. If an offset greater than 33% is specified, specifier and owner must approve mock-up and lippage.







Borigni[™] is a glazed body match porcelain with an industrial, urban aesthetic. Replicating the look of concrete in a variety of sizes, patterns and mosaics, Borigni[™] provides a seamless look indoors to outdoors.

BORIGNI™

Glazed Body Match Porcelain





















Taupe Brown Ivory








Silver Carbon

Mosaics











Ivory









Sizes			
	12"x24"	13"x13" Mesh	13"×

10mm 11

Matte

т			г	1			-	_		
+	-	Н	Н	1			-	_	1	
	ш	ш	느						1	
						_	-	-	1	
1	$\overline{}$	$\overline{}$	$\overline{}$	1			=		1	
-	Н	Н	Н					_		
	Ш	Ш	L							
			П	1			-	_		
_	_	_	_				_	_		
13" .11">	Ν	4	_	ch	1	3"x1 13.	z"	МΔ	e h	
J			· ·	311) ^1	J 1	10.	311	
.11">	(1.3	5.11	22			13.	11"×1.	3.11"		

8.5mm

N/A

Matte

8.5mm

N/A

Matte

3"x13" Floor SBN		
8.5mm		
N/A		
Matte		


Edge	Pressed	Cut	Cut
Grout Joint Recommendation	3/16"	3/16"	3/16"

Testing	Abrasion Resistance	Breaking Strength	Chemical Resistance	Water Absorption	DCOF ANSI	Scratch Hardness	Shade Variation
	C1027	C648	C650	C373	A137.1	MOHS	Rating
Results*	IV	>325 lbf	Resistant	<0.50%	>0.60	7	V2

Cut/Rounded 3/16"

Brown

Product and Installation Details | ANSI A108.02 Section 4.3.8.2 - For running bond/brick joing patterns utilizing tiles (square or rectangular) where the side being offset is greater than 18" (nominal dimension), the running bond offset will be a maximum of 33% unless otherwise specified by the tile manufacturer. If an offset greater than 33% is specified, specifier and owner must approve mock-up and lippage.




Thickness

Faces

Finish

Sustainability Attributes







FLOOR / WALL

RESIDENTIAL

COMMERCIAL

INDOOR

OUTDOOR



Cotto





White



Silver



Gray ${\sf Charcoal}$

Sizes							
	2"x10" 2.36"x9.84	,					
Thickness	8.2mm						
Faces	24						
Finish	Matte						
Edge	Pressec						
Grout Joint Recommendation	3/16"						
Testing	Abrasion Resistance C1027	Breaking Strength C648	Chemical Resistance C650	Water Absorption C373	DCOF ANSI A137.1	Scratch Hardness MOHS	Shade Variation Rating
Results*	N/A	>400 lbf	Resistant	<0.50%	>0.60	6	V2 (White Only) V4

- Sustainability Attributes

 Red List Free

 Health Product Declaration (HPD) provided upon request
 Product Packaging is 100% recyclable

What do you get when you take one of the world's oldest and humblest building materials and elevate it? Brique[™]! Consider for a statement wall in your kitchen or a durable statement floor sure to get compliments. Colors come in both cool and warm tones encouraging options for all tastes.

BRIQUETM Glazed Porcelain



















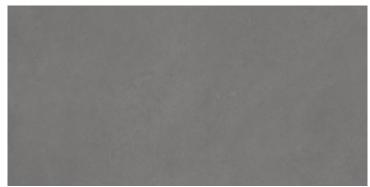

Black

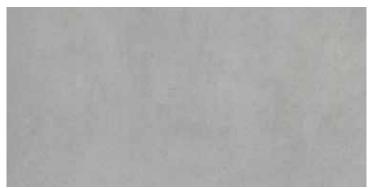



Silver

Mist



Black, Gray, Silver, Mist

Available in Size 15"x29" and 29"x29." MOQ and lead times apply. Consult your local rep for more information.

Results*	IV	>700 lbf	Resistant	<0.50%	>0.60	5	V ₂
Testing	Abrasion Resistance C1027	Breaking Strength C648	Chemical Resistance C650	Water Absorption C373	DCOF ANSI A137.1	Scratch Hardness MOHS	Shade Variation Rating
Grout Joint ecommendation	1/8"	1/8"	1/8"				
Edge	Rectified	Rectified	Cut/Rounded				
Finish	Matte	Matte	Matte				
Faces	8	32	N/A				
Thickness	10mm	10mm	8mm				
Sizes	24"x47" 23.5"x47.09"	12"×24" 11.71"×23.5"	3"x12" Floor SBN				

Product and Installation Details | ANSI A108.02 Section 4.3.8.2 - For running bond/brick joing patterns utilizing tiles (square or rectangular) where the side being offset is greater than 18" (nominal dimension), the running bond offset will be a maximum of 33% unless otherwise specified by the tile manufacturer. If an offset greater than 33% is specified, specifier and owner must approve mock-up and lippage.







The Building Blocks™ Concrete line beautifully replicates the contemporary look of concrete while bringing in an added layer of warmth and sophistication. Designed to blend perfectly with other Building Blocks™ products, as well as the Back to Basics™ collection, this line provides endless design possibilities.

BUILDING BLOCKS™ CONCRETE

Glazed Body Match Porcelain







Steel



Bronze



Product and Installation Details | ANSI A108.02 Section 4.3.8.2 - For running bond/brick joing patterns utilizing tiles (square or rectangular) where the side being offset is greater than 18" (nominal dimension), the running bond offset will be a maximum of 35% unless otherwise specified by the tile manufacturer. If an offset greater than 33% is specified, specifier and owner must approve mock-up and lippage.





- Red List Free
 - oduct Declaration (HPD) provided upon request
- Product Packaging is 100% recyclable





The Building Blocks™ Metal line strikes a harmonious balance between industrial chic and modern luxury. The rich colors are reminiscent of iron, bronze and steel and provide sophisticated elegance to any application. This porcelain tile is sure to bring any room to life.

BUILDING BLOCKS™ METAL

Glazed Porcelain





RESIDENTIAL











White



Sand



Gray



Product and Installation Details | ANSI A108.02 Section 4.3.8.2 - For running bond/brick joing patterns utilizing tiles (square or rectangular) where the side being offset is greater than 18" (nominal dimension), the running bond offset will be a maximum of 33% unless otherwise specified by the tile manufacturer. If an offset greater than 33% is specified, specifier and owner must approve mock-up and lippage.









The Building Blocks™ Wood line provides the warmth and sophistication of wood in a durable porcelain tile. Designed to blend perfectly with other Building Blocks™ products, this line provides a stylized re-creation of natural elements that create a harmonious blend of textures and sizes.

BUILDING BLOCKS™ WOOD | OAK

Glazed Porcelain





RESIDENTIAL

COMMERCIAL

INDOOR

OUTDOOR

POOL



Black



Navy



Charcoal



Silver



Ivory

Sizes							
	8	5"×47" ₄ "×46.85"					
Thickness	1	Omm					
Faces		36					
Finish		Matte (
Edge	Re	ctified					
Grout Joint Recommendation	,	3/16"					
Testing	Abrasion Resistance C1027	Breaking Strength C648	Chemical Resistance C650	Water Absorption C373	DCOF ANSI A137:1	Scratch Hardness MOHS	Shade Variation Rating
Results*	II	>700 lbf	Resistant	<u><</u> 0.50%	>0.50	7	V2
C I : I : I : A II							

Product and Installation Details | ANSI A108.02 Section 4.3.8.2 - For running bond/brick joing patterns utilizing tiles (square or rectangular) where the side being offset is greater than 18" (nominal dimension), the running bond offset will be a maximum of 33% unless otherwise specified by the tile manufacturer. If an offset greater than 33% is specified, specifier and owner must approve mock-up and lippage.





- Red List Free
 - uct Declaration (HPD) provided upon request
- Product Packaging is 100% recyclable





Yakedo™ replicates the sophisticated aesthetic of burnt cedar in a durable glazed porcelain plank tile. Based on the Shou Sugi Ban technique, or slight burning before installation, the worn textures create a certain dimension and strength. The way in which it reflects light from its crackled texture brings sophisticated movement and visual intrigue to interiors.

BUILDING BLOCKS™ WOOD | YAKEDO™

Glazed Body Match Porcelain



FLOOR / WALL

RESIDENTIAL

COMMERCIAL

INDOOR

OUTDOOR





Denali




Sequoia



Yosemite



Zion

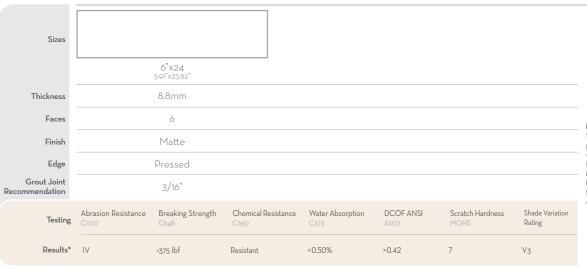

Product and Installation Details | ANSI A108.02 Section 4.3.8.2 - For running bond/brick joing patterns utilizing tiles (square or rectangular) where the side being offset is greater than 18" (nominal dimension), the running bond offset will be a maximum of 35% unless otherwise specified by the tile manufacturer. If an offset greater than 33% is specified, specifier and owner must approve mock-up and lippage.





- Red List Free
- n (HPD) provided upon request
- Product Packaging is 100% recyclable

Cabin™ beautifully replicates the subtle look of wood in durable glazed porcelain tile. Offered in neutral earthy colors to compliment your space.



















Shore Coast Ocean

Mosaics



Sizes	18"x18" 17.60"x17.60"	12"x12" 12.28"x12.28"	13"x23" 12.68'x22.56"	12"x12" Mesh	3"x12" Floor SBN		
Thickness	8.4mm	8mm	8.4mm	7.7mm	Check Web	site	
Faces	20	20	Check Website	N/A	N/A		
Finish	Matte	Matte	Matte	Matte	Matte		
Edge	Pressed	Pressed	Pressed	Cut	Cut/Round	ded	
Grout Joint Recommendation	3/16"	3/16"	3/16"	3/16"	3/16"		
Testing	Abrasion Resistance C1027	Breaking Strength C648	Chemical Resistance C650	Water Absorption C373	DCOF ANSI A137.1	Scratch Hardness MOHS	Shade Variation Rating
Results*	Check Website	Check Website	Check Website	Check Website	Check Website	Check Website	V2



- Sustainability Attributes

 Red List Free

 Health Product Declaration (HPD) provided upon request
 Product Packaging is 100% recyclable

Cabo II™ features crackled, subtle movement to emulate the details of natural travertine. Colors of warm and cool neutrals reflect a relaxed, coastal feel. Varied tile sizes invite a range of applications.





FLOOR / WALL

RESIDENTIAL

COMMERCIAL

INDOOR

OUTDOOR

POOL





White



Black

Sizes	12"x24"	3"x12"					
	12 X24 11.81"x23.62"	Floor SBN					
Thickness	10mm	10mm					
Faces	16	N/A					
Finish	Matte	Matte					
Edge	Rectified	Rectified					
Grout Joint Recommendation	3/16"	3/16"					
Testing	Abrasion Resistance C1027	Breaking Strength C648	Chemical Resistance C650	Water Absorption C373	DCOF ANSI A137.1	Scratch Hardness MOHS	Shade Variation Rating
Results*	IV	>450 lbf	Resistant	<0.5%	>0.55	6	V ₂

Product and Installation Details | ANSI A108.02 Section 4.3.6.2 - For running bond/brick joing patterns utilizing tiles (square or rectangular) where the side being offset is greater than 18' (nominal dimension), the running bond offset will be a maximum of 35% unless otherwise specified by the tile manufacturer. If an offset greater than 33% is specified, specifier and owner must approve mock-up and lippage.



• Red List Fre

- n request
- Product Packaging is 100% recyclable

Cassero II® offers a rustic and refined concrete linear texture in glazed porcelain. The matte finish is offered in colors complementing each other and is suitable for interior and exterior applications.

CASSERO II®

Glazed Porcelain




















Atolia

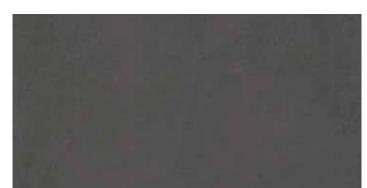

Kismet Loring

Mosaics










Atolia Jerome Kismet

Sizes

Thickness Faces

> Finish Edge





9mm	9.1mm	9mm
12	N/A	N/A
Matte	Matte	Matte
Rectified	Cut	Cut/Rounded

3/16"

Grout Joint	
Recommendation	

Testing	Abrasion Resistance	Breaking Strength	Chemical Resistano
	C1027	C648	C650
Results*	III	>250 lbf	Resistant

ce	Water Absorption C373	Δ

<0.50%

DCOF ANSI	Scratch Hardness	Shade Variation
A137.1	MOHS	Rating
>0.42	7	

Product and Installation Details | ANSI A108.02 Section 4.3.8.2 - For running bond/brick joing patterns utilizing tiles (square or rectangular) where the side being offset is greater than 18" (nominal dimension), the running bond offset will be a maximum of 33% unless otherwise specified by the tile manufacturer. If an offset greater than 33% is specified, specifier and owner must approve mock-up and lippage.



- Ded List Eres
- Health Product Declaration (HPD) provided upon request

3/16"

- Product Packaging is 100% recyclable
- VOC Free
- 0% Pre- and Post-Consumer

3/16"

*For more information visit www.emser.com. Always consult a professional for proper usage and installation.

Sustainability Attributes



CHIADO II™ Glazed Porcelain







Era Memoir



Record

Mosaics



Era	Memoir	Record

Sizes	12"x24" 11.81"x23.62"		2" Mesh "x11.69"	3"x24" Floor SBN			
Thickness	9.8mm	9.6	8mm	9.8mm			
Faces	16	1	N/A	N/A			
Finish	Matte	M	1atte	Matte			
Edge	Pressed	(Cut Cu	t/Rounded			
Grout Joint Recommendation	3/16"	3	5/16"	3/16"			
Testing	Abrasion Resistance C1027	Breaking Strength C648	Chemical Resistance C650	Water Absorption C ₃₇₃	DCOF ANSI A137.1	Scratch Hardness MOHS	Shade Variation Rating
Results*	IV	>500 lbf	Resistant	<u><</u> 0.5%	<u>></u> 0.60	7	V2

Product and Installation Details | ANSI A108.02 Section 4.3.8.2 - For running bond/brick joing patterns utilizing tiles (square or rectangular) where the side being offset is greater than 18" (nominal dimension), the running bond offset will be a maximum of 33% unless otherwise specified by the tile manufacturer. If an offset greater than 33% is specified, specifier and owner must approve mock-up and lippage.






- Ded List Free
- Health Product Declaration (HPD) provided upon request
- Product Packaging is 100% recyclable
- VOC Free
- Recycled Content 4% Pre-Consumer
- ${}^*\!For \,more \,information \,visit \,www.emser.com. \,Always \,consult\,a\,professional\,for\,proper\,usage\,and\,installation.$

Chronicle $^{\!\scriptscriptstyle\mathsf{TM}}$ is inspired by the universal luxury of veincut marble. Light-toned colors with high-definition variation complement any decor.

CHRONICLE™ Glazed Porcelain



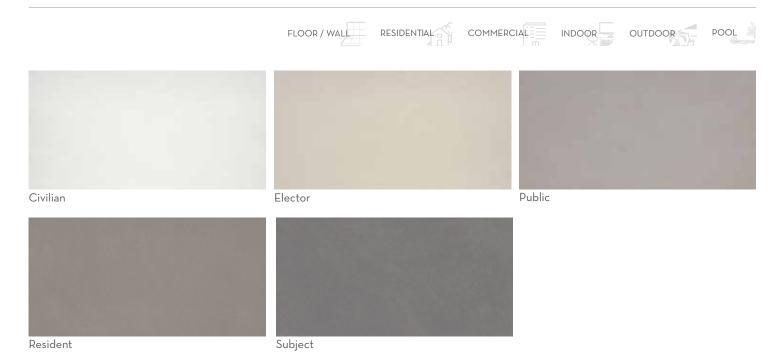



Civilian, Elector, Public, Resident, and Subject

All sizes available in Lappato finish. MOQ and lead times apply. Consult your local rep for more information.

Faces Finish Edge Grout Joint	Matte Rectified 1/8"	M. Rec	atte tified /8"	30 Matte & Lappato Rectified	M Cut/F	N/A latte Rounded /8"	20 Matte Rectified 1/8"	20 Matte Rectified 1/8"
Finish Edge	Matte	M	atte	Matte & Lappato	M	latte	Matte	Matte
				Matte &		<u>'</u>		
Faces	12		15		1	N/A	20	20
		10mm 8.8mm 12 15		30 N/A				
Thickness	10mm			8.8mm	8.8mm 10mm		10mm	10mm
Sizes	24"×48" 23.62"×47.24"	24" 23.62'	"x24" "x23.62"	12"x24" 11.81"x23.62"	3' Floo	'x12" or SBN	6"x12" Cove Base	1"x6" Cove Base Corner Ou

Product and Installation Details | ANSI A108.02 Section 4.3.8.2 - For running bond/brick joing patterns utilizing tiles (square or rectangular) where the side being offset is greater than 18" (nominal dimension), the running bond offset will be a maximum of 33% unless otherwise specified by the tile manufacturer. If an offset greater than 33% is specified, specifier and owner must approve mock-up and lippage.





In a return to form, Citizen® embraces large format tiles. The timelessly classic concrete look is expressed through subtle brushed color variations of tans and grays. Visually arresting, Citizen® achieves an unencumbered chic aesthetic on floors, walls, and a wide array of surfaces.

CITIZEN® Glazed Body Match Porcelain







Ash





Taupe Gray









Ash	Cream	Taupe	Gra
-----	-------	-------	-----

Sizes	12"x24" 11.81"x23.62"	12"x12" Mesl	3"x12" Floor SBN				
Thickness	10.5mm	10.3mm	10.5mm				
Faces	12	N/A	N/A				
Finish	Matte	Matte	Matte				
Edge	Pressed	Cut	Cut/Round	ded			
Grout Joint Recommendation	3/16"	3/16"	3/16"				
Testing	Abrasion Resistance		emical Resistance	Water Absorption	DCOF ANSI	Scratch Hardness	Shade Variation

Testing	Abrasion Resistance	Breaking Strength	Chemical Resistance	Water Absorption	DCOF ANSI	Scratch Hardness	Shade Variation
	C1027	C648	C650	C373	A137.1	MOHS	Rating
Results*	III	>450 lbf	Non-Resistant	<0.5%	>0.42	7	V2

Product and Installation Details | ANSI A108.02 Section 4.3.8.2 - For running bond/brick joing patterns utilizing tiles (square or rectangular) where the side being offset is greater than 18" (nominal dimension), the running bond offset will be a maximum of 35% unless otherwise specified by the tile manufacturer. If an offset greater than 33% is specified, specifier and owner must approve mock-up and lippage.



Sustainability Attributes

Red List Free

- \
- Product Packaging is 100% recyclable

Ciudad[™] recreates the look of natural stone in ceramic tile using high-definition printing. Its pattern variation from tile to tile is due to it's striking graphic imaging, which adds a contemporary statement to any application.

CIUDAD™ Glazed Ceramic





RESIDENTIAL

COMMERCIAL

INDOOR

POOL





Anthracite


Gray






Silver White

Mosaics







Anthracite

Gray

Silver

White

Sizes	31"x31" 31.38"x31.38" (Porcelain)	16"x31" 15.63"x31.38' (Porcelain)		10"x16" 9.76"x 15.67" (Ceramic)	12″x12″ Me 11.68″x11.50		
Thickness	9mm	9mm	9mm	7.5mm	9mm	9mm	
Faces	12	12	10	17	N/A	N/A	
Finish	Matte	Matte	Matte	Matte	Matte	Matte	
Edge	Rectified	Rectified	Pressed	Pressed	Cut	Cut/Roun	ided
Grout Joint Recommendation	3/16"	3/16"	3/16"	3/16"	3/16"	3/16"	
Testing	Abrasion Resistance C1027	Breaking Strength C648	Chemical Resistance C650	Water Absorption C373	DCOF ANSI A137.1	Scratch Hardness MOHS	Shade Variation Rating
Results*	N/A (Wall) IV (Silver & White) II (Gray & Anthr.)	>125 lbf (Wall) >250 lbf (Floor)	Resistant	<20.0% (Wall) <0.5% (Floor)	N/A (Wall) >0.42 (Floor)	3 (Wall) 7 (Floor)	V4

Product and Installation Details | ANSI A108.02 Section 4.3.8.2 - For running bond/brick joing patterns utilizing tiles (square or rectangular) where the side being offset is greater than 18" (nominal dimension), the running bond offset will be a maximum of 33% unless otherwise specified by the tile manufacturer. If an offset greater than 33% is specified, specifier and owner must approve mock-up and lippage.



Sustainability Attributes

Create a mood with $Cogent^{\mathbb{T}^{M}}$, a concrete look that takes its inspiration from a love for modern industrial design. It serves as the bedrock for a space, grounding and graceful in its texture and color variation. The result? A versatile and timeless tile that brings design to life, both residential and commercial, urban and suburban.

COGENT™ Glazed Ceramic & Porcelain



 $\mathsf{Cogent}^{\scriptscriptstyle\mathsf{TM}}$ | White & Anthracite



RESIDENTIAL

COMMERCIAL

INDOOR

OUTDOOR


POOL





Dama Oro

Mosaics





Dama



Sizes											
	24"x24" 23.82"x23.82"	23"x23" 23.43"x23.43"	18"x18" 17.72"x17.72"	13"x13" 12.99"x12.99"	12"x24" 11.81"x23.62"	11"x23" 11.42"x23.23"	3"x6" 2.95"x5.91"	13"x13" Mesh 12.60"x12.60"	Herringbone Mesh	3"x13" Floor SBN	3"x11" Floor SBN
Thickness	10mm	10mm	8.6mm	7.8mm	9mm	10mm	9-10mm	8.3mm	8.3mm	8.3mm	9.5mm
Faces	10	10	9	10	20	20	>100	N/A	N/A	N/A	N/A
Finish	Matte	Polished	Matte	Matte	Matte	Polished	Matte & Polished	Matte	Matte	Matte	Polished
Edge	Pressed	Rectified	Pressed	Pressed	Pressed	Rectified	Rectified	Cut	Cut	Rectified	Rectified
Grout Joint Recommendation	3/16"	1/8"	3/16"	3/16"	3/16"	1/8"	3/16"	5/32"	3/16"	3/16"	3/16"
Testing	Abrasion Resista C1027	Breaking St C648	crength Chemic C650	al Resistance	Water Absorption C373	DCOF ANSI A137.1	Scratch Hardne MOHS	ss Shade Variati Rating	ion		
Results*	IV	>350 lbf	Resistan	t	<0.5%	<0.42 (Polished) >0.42 (Matte)	7	V2	-	Recommend	ed 33% Offset*



- Sustainability Attributes

 Red List Free
 Health Product Declaration (HPD) provided upon request
 Product Packaging is 100% recyclable

Pure, simple, relaxing, Contessa® is a true jewel adding timeless style to any space. Inspired by the exquisite veining in marble, this line is offered in multiple sizes

CONTESSA® Glazed Porcelain







Octagon Gray

Bianco



Octagon Chocolate








Scored Tile

- Pre-scoring provides a consistent design and easy installation.
- Apply grout directly over the scored tile lines. Fusion Pro grout is recommended.
- Scored lines have a grout width of 1/16".
- Gives the impression of a 9"x9" tile install.
- Great for walls and backsplash applications!

The style and name of Cortijo™ is derived from courtyards in the south of Spain. The unique scored design of this 18x18 ceramic floor and wall tile provides the illusion of multiple tiles, but installs with the ease of one. The cool color tone and hexagon styling fits well with both traditional and contemporary designs.





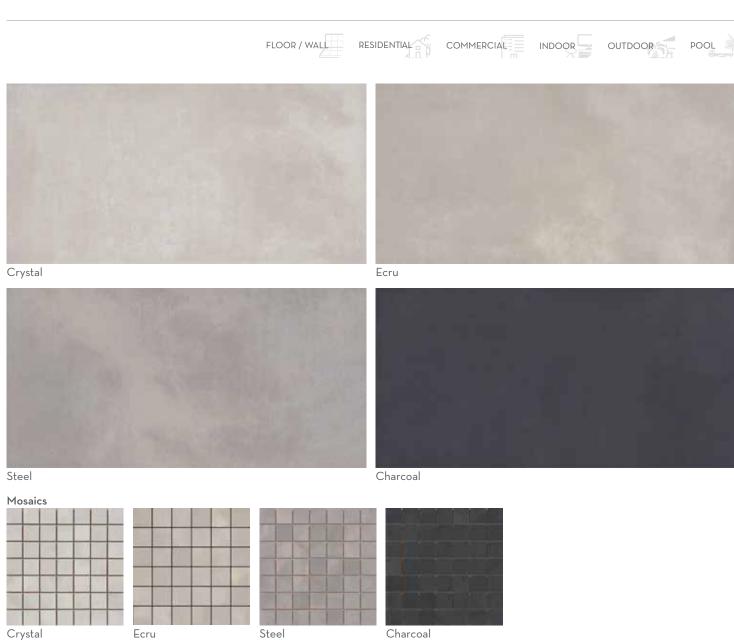

Sizes	24"x24" 23.62"x23.62"	12"x24" 11.81"x23,62"	13"X13" Mesh 13.07"x13.07"	3"X12" Floor SBN			
Thickness	9.8mm	9.8mm	7.2mm	9.8mm			
Faces	5	10	N/A	N/A			
Finish	Matte	Matte	Matte	Matte			
Edge	Pressed	Pressed	Cut	Cut/Rounded			
Grout Joint Recommendation	3/16"	3/16"	3/16"	3/16"			
Testing	Abrasion Resistance C1027	Breaking Strength C648	Chemical Resistance C650	Water Absorption C373	DCOF ANSI A137.1	Scratch Hardness MOHS	Shade Variation Rating
Results*	IV	≥250 lbf	Resistant	<u><</u> 0.50%	>0.60	7	V3

Product and Installation Details | ANSI A108.02 Section 4.3.8.2 - For running bond/brick joing patterns utilizing tiles (square or rectangular) where the side being offset is greater than 18" (nominal dimension), the running bond offset will be a maximum of 33% unless otherwise specified by the tile manufacturer. If an offset greater than 33% is specified, specifier and owner must approve mock-up and lippage.





- Red List Fre
- aration (HPD) provided upon request
- Product Packaging is 100% recyclable

Cosmopolitan[™] is an artful recreation of brushed concrete. Rich colors elevate urban living with modern sensibility. An approachable matte finish allows the collection to complement a range of aesthetics.

COSMOPOLITAN™

Glazed Porcelain






*For more information visit www.emser.com. Always consult a professional for proper usage and installation.

Council™ offers a modern and fashionable approach to floor and wall applications. With a nod to leather, this series is available in four cool tones that were designed to mix and match to create stunning environments.

COUNCILTM Glazed Porcelain



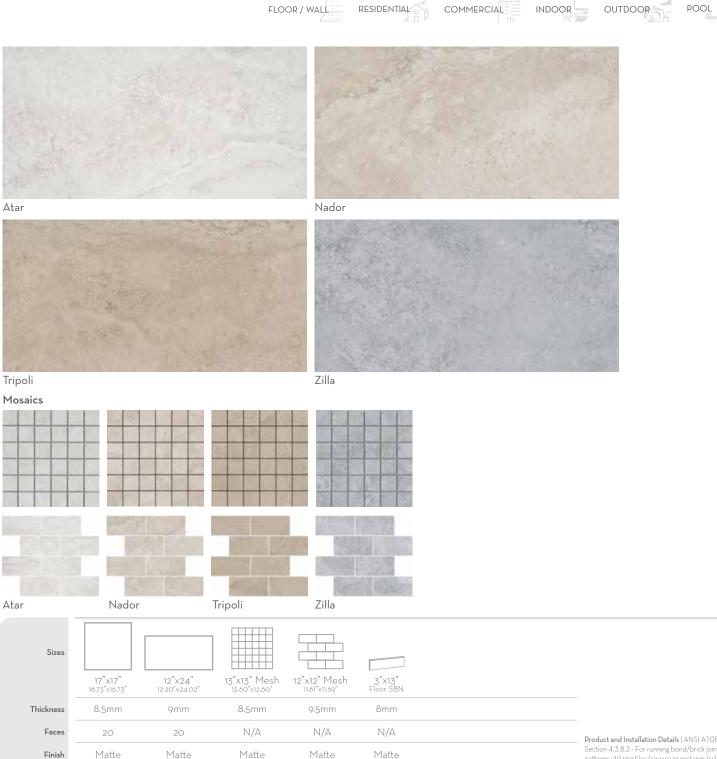

Sustainability Attributes

Edge

Testing

Results*

Grout Joint

Recommendation

- Red List Free
- Health Product Declaration (HPD) provided upon request

Pressed

3/16"

Abrasion Resistance

Product Packaging is 100% recyclable

Resistant

Cut

3/16"

Chemical Resistance

Cut

3/16"

<0.50%

Water Absorption

Cut/Rounded

3/16"

>0.50

DCOF ANSI

Scratch Hardness

8

Shade Variation

Rating

۷з

*For more information visit www.emser.com. Always consult a professional for proper usage and installation.


 ${\sf Pressed}$

3/16"

>450 lbf

Breaking Strength

Product and Installation Details | ANSI A108.02 Section 4.3.8.2 - For running bond/brick joing patterns utilizing tiles (square or rectangular) where the side being offset is greater than 18" (nominal dimension), the running bond offset will be a maximum of 33% unless otherwise specified by the tile manufacturer. If an offset greater than 33% is specified, specifier and owner must approve mock-up and lippage.



 $\mathsf{Daroca}^\mathsf{TM}$ brings the warmth of nature into a modern porcelain tile. Inspired by the look of travertine in warm and cool tones, $\mathsf{Daroca}^\mathsf{TM}$ is ideal for any application.
























Diagram

Portrait

٩rt








Art has 18 patterns, intended for random installations or accent pieces.

Art Faces

Sizes							
	9"×9" 9.17"×9.17"	9"×9" 9.17"×9.17"					
Thickness	8.5mm	8.5mm					
Faces	1	18 (Art)					
Finish	Matte	Matte					
Edge	Pressed	Pressed					
Grout Joint Recommendation	1/8"	1/8"					
Testing	Abrasion Resistance C1027	Breaking Strength C648	Chemical Resistance C650	Water Absorption C373	DCOF ANSI A137.1	Scratch Hardness MOHS	Shade Variation Rating
Results*	IV	≥700 lbf	Resistant	<u><</u> 0.50%	<u>></u> 0.60	7	V1



- Red List Free
- Declaration (HPD) provided upon request
- Product Packaging is 100% recyclable
- VOC Free



any space.






by the tile manufacturer. If an offset greater than 33% is specified, specifier and owner must

Recommended 33% Offset*

approve mock-up and lippage.

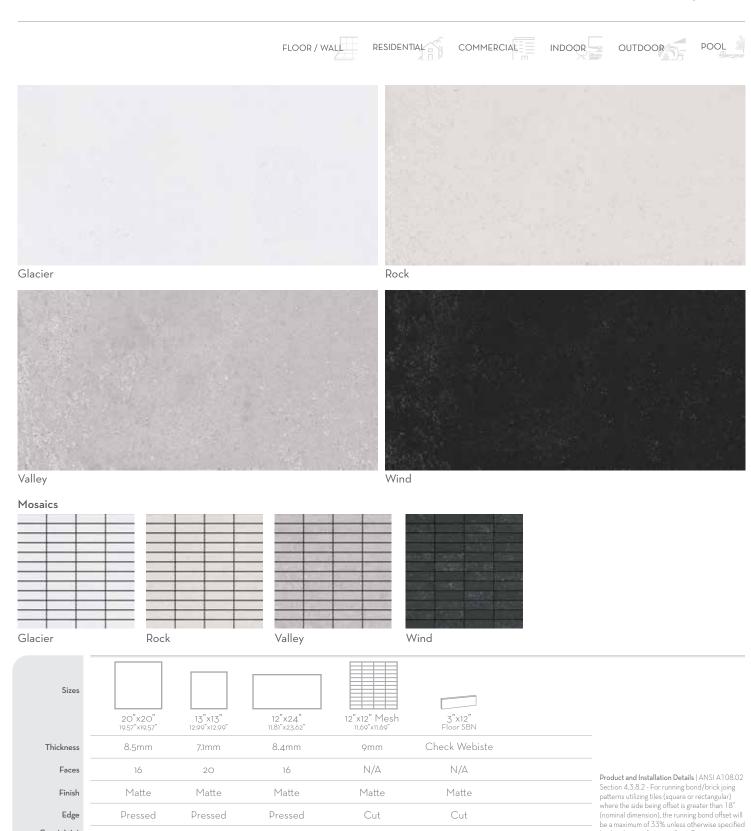

Sustainability Attributes

Testing

Results*

Grout Joint

Recommendation

3/16"

Abrasion Resistance

3/16"

Chemical Resistance

Check Webiste

Water Absorption

<0.50%

Check Webiste

DCOF ANSI

>0.60

Scratch Hardness

Shade Variation

Rating

V2

>250 lbf (13x13)

3/16"


>350 lbf (12x24, 20x20) Resistant

Breaking Strength

Cool tones, like those available from Erosion™ porcelain tile collection, remain the standard in interiors and exteriors. Their aesthetic appeal, coupled with the durability of tile, makes for a strong foundation in design. Available in three sizes, Erosion features the beauty found in nature.

EROSION™ Glazed Porcelain



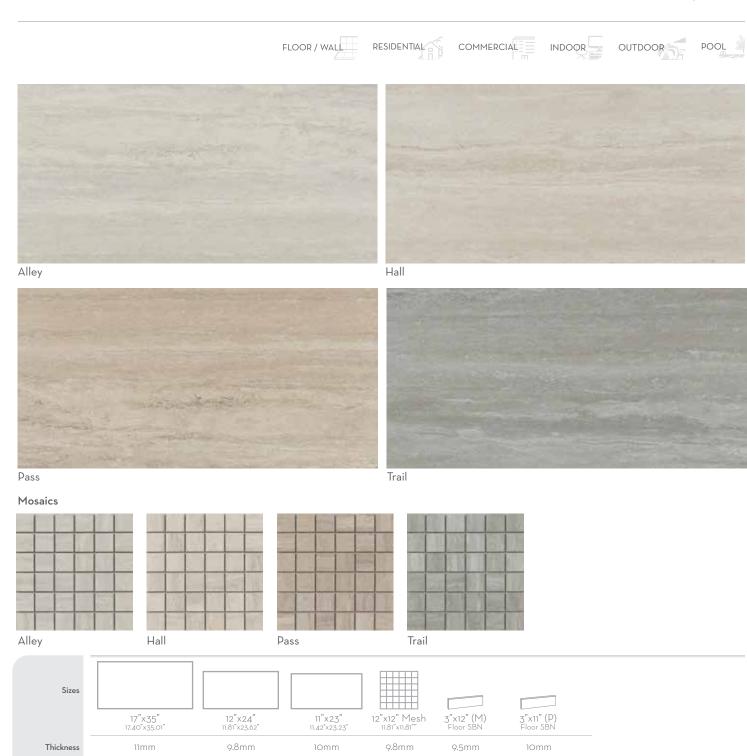

Sustainability Attributes

Faces

Finish

Edge

Testing

Results*

Grout Joint

Recommendation

Ded List Free

• 000

Resistant

16

Matte

Pressed

3/16"

Chemical Resistance

16

Polished

Rectified

3/16"

<0.50%

Water Absorption

N/A

Matte

 Cut

3/16"

DCOF ANSI

<0.42 (Polished) >0.60 (Matte) N/A

Matte

Cut/Rounded

3/16"

Scratch Hardness

N/A

Polished

Cut/Rounded

3/16"

Shade Variation

Rating

V2

Product and Installation Details | ANSI A108.02 Section 4.3.8.2 - For running bond/brick joing patterns utilizing tiles (square or rectangular)

where the side being offset is greater than 18" (nominal dimension), the running bond offset will be a maximum of 33% unless otherwise specified

by the tile manufacturer. If an offset greater than 33% is specified, specifier and owner must

Recommended 33% Offset*

approve mock-up and lippage.

Health Product Declaration (HPD) provided upon request

Abrasion Resistance

5

Matte

Rectified

3/16"

Product Packaging is 100% recyclable

IV

Breaking Strength

>650 lbf

Esplanade® embodies the earthy aesthetic of travertine in a durable porcelain tile. Nuanced color variation lends a natural aesthetic. Large format and mosaic tiles allow for a range of design applications.

ESPLANADE®

Glazed Porcelain

















Grigio





Bianco

Cafe













Bianco

Cafe

Chiara

Grigio

Noce

Faces Finish Edge	Matte Pressed	١	N/A 1atte Cut	М	N/A latte Rounded			
Grout Joint Recommendation	3/16"	3	3/16"	3.	/16"			
Testing	Abrasion Resistance	Breaking Strength C648	Chemical Re	esistance	Water Absorption C373	DCOF ANSI A137.1	Scratch Hardness MOHS	Shade Variation Rating

Product and Installation Details | ANSI A108.02 Section 4.3.8.2 - For running bond/brick joing patterns utilizing tiles (square or rectangular) where the side being offset is greater than 18" (nominal dimension), the running bond offset will be a maximum of 33% unless otherwise specified by the tile manufacturer. If an offset greater than 33% is specified, specifier and owner must approve mock-up and lippage.






- Red List Free
- pon request
- Product Packaging is 100% recyclable
- *For more information visit www.emser.com. Always consult a professional for proper usage and installation.

Eurasia $^{\text{TM}}$ interprets the dramatic design statement of imported stone through striking graphic imagery. Layered segments of tonal neutrals bring visual depth and flair. A timeless color palette allows for a range of applications.

EURASIATM Glazed Porcelain



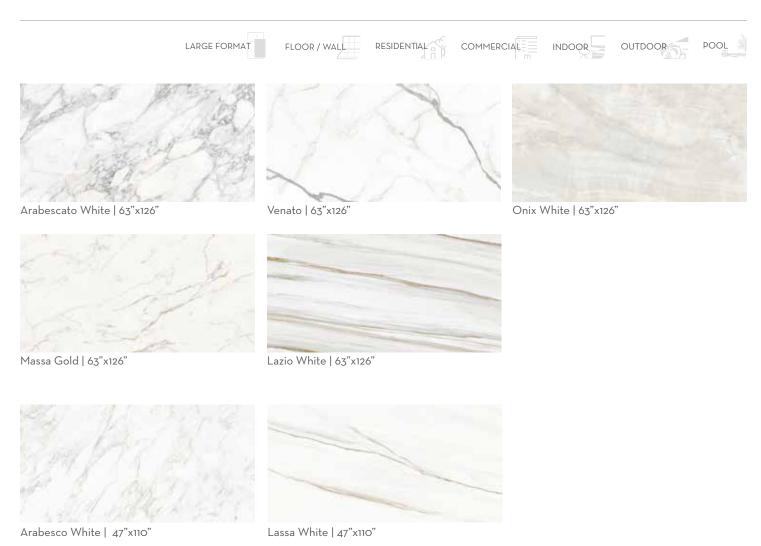



Product and Installation Details | ANSI A108.02 Section 4.3.8.2 - For running bond/brick joing patterns utilizing tiles (square or rectangular) where the side being offset is greater than 18" (nominal dimension), the running bond offset will be a maximum of 33% unless otherwise specified by the tile manufacturer. If an offset greater than 33% is specified, specifier and owner must approve mock-up and lippage.





- Red List Fre
- Health Product Declaration (HPD) provided upon request
- Product Packaging is 100% recyclable
- VOC Free
- Recycled content varies by color, please
 pheals we have a produced information.



The flexibility of Expanse® gives an elegant look to surfaces for commercial and residential interior and exterior installations. This beautiful and unique large format tile offers a seamless look to floors and walls.

EXPANSE® Glazed & Thin Tile Porcelain



















Network Gray | 63"x126"



Network Silver | 63"x126"



Network Taupe | 63"x126"



Network White | 63"x126"



Hangar Ash | 63"x126"




Hangar Smoke | 63"x126"

Enhance[™] Collection

Parkview™ Astral | 47"x102"

Parkview™ Brown | 47"x102"

MOQ and lead times apply. Consult your local rep for more information.

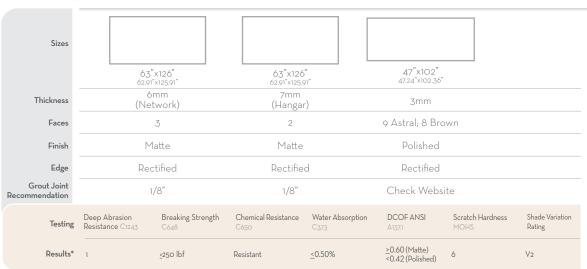

Product and Installation Details | ANSI A108.02 Section 4.3.8.2 - For running bond/brick joing patterns utilizing tiles (square or rectangular) where the side being offset is greater than 18" (nominal dimension), the running bond offset will be a maximum of 33% unless otherwise specified by the tile manufacturer. If an offset greater than 33% is specified, specifier and owner must approve mock-up and lippage.





- Ded List Free
- Health Product Declaration (HPD) provided upon request
- Product Packaging is 100% recyclable
- VOC Free
- Recycled content varies by color, please check website for undated information.



The flexibility of Expanse® gives an elegant look to surfaces for commercial and residential interior and exterior installations. This beautiful and unique large format tile offers a seamless look to floors and walls.

EXPANSE® Glazed & Thin Tile Porcelain



















Milan

London



Barcelona

Mosaics








Milan

London

Barcelona

Paris

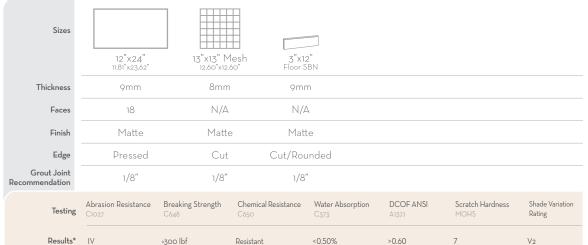

Product and Installation Details | ANSI A108.02 Section 4.3.8.2 - For running bond/brick joing patterns utilizing tiles (square or rectangular) where the side being offset is greater than 18" (nominal dimension), the running bond offset will be a maximum of 33% unless otherwise specified by the tile manufacturer. If an offset greater than 33% is specified, specifier and owner must approve mock-up and lippage.







- * For more information visit www.emser.com. Always consult a professional for proper usage and installation.

Explorer $^{\text{TM}}$ is an artful blend of reclaimed wood and natural stone for an urban aesthetic. High-definition printing pairs wood striations with stone veining in soft, alluring neutrals.

EXPLORER™ Glazed Porcelain



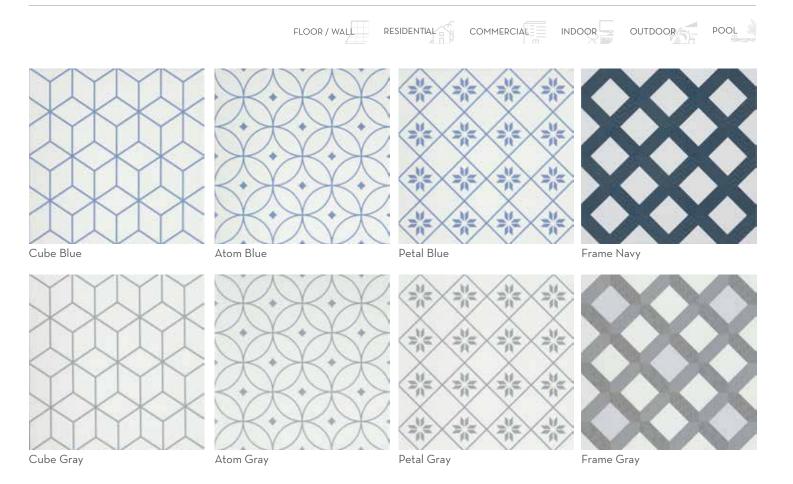

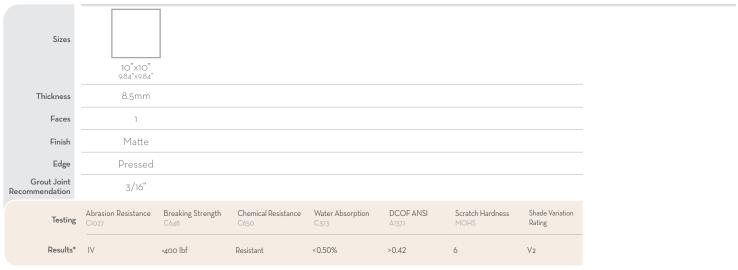



Red List Free

- VOC Free

Geometry[™] takes design to a whole new level. The modern, retro flare look of Geometry[™] provides an element of uniqueness not found in most tiles. The raised pattern adds interest and character and will transcend any application.

GEOMETRYTM Glazed Porcelain



















Ash



Coal

Mosaics





	STATE OF THE PERSON NAMED IN COLUMN 2	
Ash	Smoke	Coal

Sizes	63"x126" 62.85"x125.79	23″×47 23.46″×47(12"x12" Mesh 11.69"x11.69"	3"X12" Floor SBN	6"x12" Cove Base	1"x6" Corner
Thickness	7mm	9mm	9mm	9mm	9mm		
Faces	2	10	20	N/A	N/A	N/A	N/A
Finish	Matte	Matte	Matte	Matte	Matte	Matte	Matte
Edge	Rectified	Rectifie	d Rectified	Cut	Cut/Rounded	Pressed	Pressed
Grout Joint Recommendation	5/64"	5/64"	5/64"	5/64"	5/64"	5/64"	5/64"
Testing	Abrasion Resistance C1027	Breaking Strength C648	Chemical Resistance C650	Water Absorption C373	DCOF ANSI A137.1	Scratch Hardness MOHS	Shade Variation Rating
Results*	٧	>300 lbf	Resistant	<0.50%	>0.42	7	V ₂

Product and Installation Details | ANSI A108.02 Section 4.3.8.2 - For running bond/brick joing patterns utilizing tiles (square or rectangular) where the side being offset is greater than 18" (nominal dimension), the running bond offset will be a maximum of 33% unless otherwise specified by the tile manufacturer. If an offset greater than 33% is specified, specifier and owner must approve mock-up and lippage.









Hangar $^{\mathsf{TM}}$ delivers a flexible, modern solution offered in large format and trending tile sizes. The contemporary linear look of Hangar $^{\mathsf{TM}}$ adds sophistication to residential and commercial settings.

HANGARTM Glazed Porcelain



FLOOR / WALL RESIDENTIAL







White Silver

Mosaics



White Silver

Sizes	18"x18" 17.60"x17.60"	12"x12" 12.28"x12.28"	12"x12" Mesh 12.28"x12.28"	3"x12" Floor SBN			
Thickness	8.4mm	8mm	7.3mm	8.4mm			
Faces	8	8	N/A	N/A			
Finish	Matte	Matte	Matte	Matte			
Edge	Pressed	Pressed	Cut (Cut/Rounded			
Grout Joint Recommendation	3/16"	3/16"	3/16"	3/16"			
Testing	Abrasion Resistance C1027	Breaking Strength C648	Chemical Resistance C650	e Water Absorption C373	DCOF ANSI A137.1	Scratch Hardness MOHS	Shade Variation Rating
Results*	III	>250 lbf	Resistant	>7.0%	<0.42	7	V ₃
Containability Att							



Havana $^{\text{TM}}$ is an elegant and understated stone-look showcasing cool and warm neutral colors in a variety of sizes and coordinating mosaics.





FLOOR / WALL

RESIDENTIAL

COMMERCIAL

INDOOR

POOL



Fir



Larch



Poplar

Sizes		8"x35" 7.87"x35.43"					
Thickness		10mm					
Faces		6					
Finish		Matte					
Edge		Pressed					
Grout Joint Recommendation		3/16"					
Testing	Abrasion Resistance C1027	Breaking Strength C648	Chemical Resistance C650	Water Absorption C373	DCOF ANSI A137.1	Scratch Hardness MOHS	Shade Variation Rating
Results*	III	>350 lbf	Resistant	<0.5%	>0.42	7	V ₃



- Sustainability Attributes

 Red List Free


 Health Product Declaration (HPD) provided upon request
 Product Packaging is 100% recyclable

Heirloom™ porcelain tile offers a naturally elegant wood look, designed for both floors and walls. From traditional earthy tones to distinctly on-trend variations, expect to see colors at each end of the spectrum – both warm and cool. And in environments such as kitchens, baths and spaces exposed to moisture, wood-look tile provides both a beautiful and practical application, all at once.

HEIRLOOM™

Glazed Porcelain



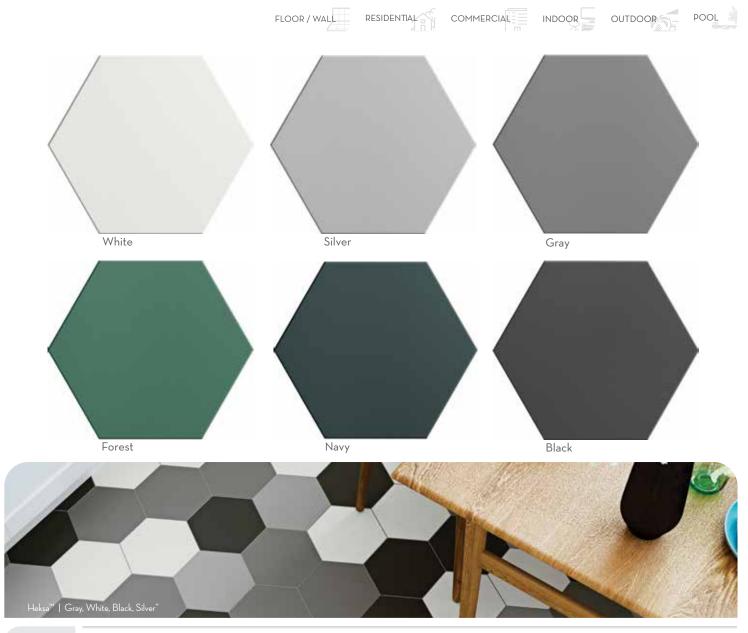





- Ded List Free
- Health Product Declaration (HPD) provided upon request
- Product Packaging is 100% recyclable
- VOC None
- Recycled Content >30%
 - Pre-Consumer

Heksa[™] porcelain tile features the distinct and chic geometric hexagon, as timeless as it is efficient in design. The iconic honeycomb pattern adds edge when creating unique designs, versatile for any room. Heksa colors include six options, as varied as tried-and-true neutrals and a pop of color with green and navy.

HEKSATM
Glazed Porcelain





Beige



Taupe



Oak

Testing	Abrasion Resistance C1027	Breaking Strength C648	Chemical Resistance C650	Water Absorption C373	DCOF ANSI A137.1	Scratch Hardness MOHS	Shade Variation Rating
Grout Joint ecommendation		5/64"					
Edge		Rectified					
Finish		Matte					
Faces		8					
Thickness		9mm					
		8"x47" 7.83"x47.01"					
Sizes							

Product and Installation Details | ANSI A108.02 Section 4.3.8.2 - For running bond/brick joing patterns utilizing tiles (square or rectangular) where the side being offset is greater than 18" (nominal dimension), the running bond offset will be a maximum of 33% unless otherwise specified by the tile manufacturer. If an offset greater than 33% is specified, specifier and owner must approve mock-up and lippage.






- VOC Free
 Recycled Content 0% Pre &
 Post-Consumer



Fusing old-world glamour with contemporary rustic tones, Hollywood™ adds to the collections of distinct wood-look tile. Beige and Oak colorations recall the beautiful, classic look of aged wood, while Taupe embraces cool undertones.

HOLLYWOODTM Glazed Porcelain



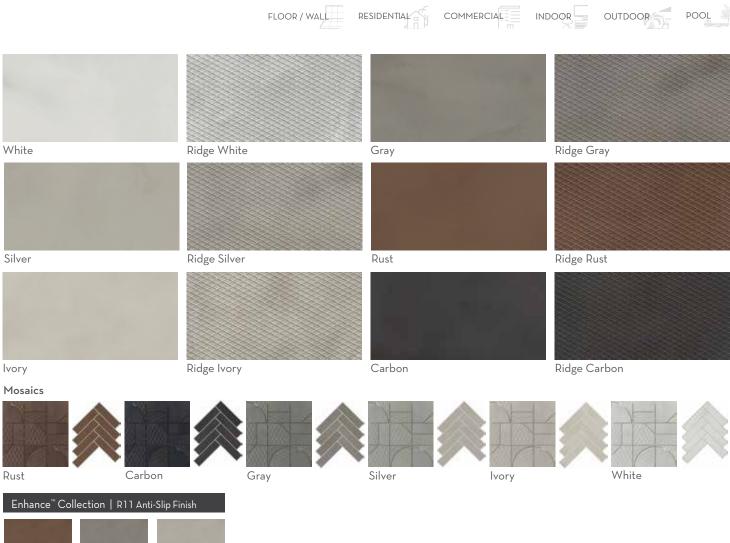



Rust, Gray, and Silver

 $\label{eq:available} Available in Size 31"x 31." \, MOQ \, and \, lead \, times \, apply. \, Consult \, your \, local \, rep \, for \, more \, information.$

Sizes	31"x31" 3138"x3138"		12"x23" 1		17"x17" Mesh		x12" r SBN
Thickness	9mm	9r	mm	9mm	9mm	Check	Website
Faces	18		72 e Pattern)	Check Website	N/A	N	I/A
Finish	Matte	Ma	atte	Matte	Matte	M	atte
Edge	Rectified	Rec	tified	Cut	Cut	Cut/R	ounded
Grout Joint Recommendation	1/8"	1/	/8"	1/8"	1/8"	1,	/8"
Testing	Abrasion Resistance C1027	Breaking Strength C648	Chemical Resista C650	Water Absorption	DCOF ANSI A137.1	Scratch Hardness MOHS	Shade Variation Rating
Results*	III	>350 lbf	Resistant	<0.5%	>0.60 (Flat) <0.42 (Ridge)	7	V2

Product and Installation Details | ANSI A108.02 Section 4.3.8.2 - For running bond/brick joing patterns utilizing tiles (square or rectangular) where the side being offset is greater than 18" (nominal dimension), the running bond offset will be a maximum of 35% unless otherwise specified by the tile manufacturer. If an offset greater than 35% is specified, specifier and owner must approve mock-up and lippage.





- Ded List Erec
- Health Product Declaration (HPD) provided upon request
- Product Packaging is 100% recyclable
- VOC Free
- Recycled Content 9.8-39.6% Pre-Consumer and 0% Post-Consumer




The striking colorways and rich movement of Ironworx[™] were inspired by molten metal as it is being forged. This porcelain tile brings to life the style and sophistication of metal in an easy to maintain finish. The matching Ridge pattern adds dimension and subtle texture making Ironworx the perfect centerpiece for floors and walls.

IRONWORX™

Glazed Porcelain



 $\mathsf{JUTE}^{\mathsf{TM}}$

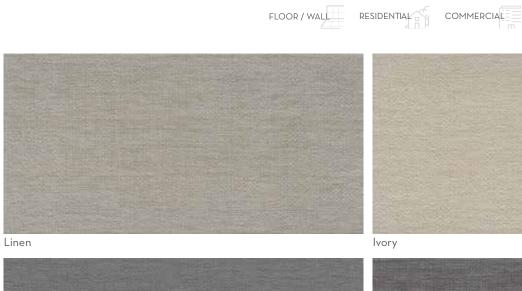



INDOOR





Gray Charcoal

Sizes	12"x24" 23.62"x11.81"	12"x12" M	lesh 3"x'	12" SBN			
Thickness	8mm	Check We	ebsite 8m	m			
Faces	1	N/A	N/	Ά			
Finish	Matte	Matte	e Ma	tte			
Edge	Pressed	Cut	Cut/Ro	unded			
Grout Joint Recommendation	3/16"	3/16"	3/1	6"			
Testing	Abrasion Resistance C1027	Breaking Strength C648	Chemical Resistance C650	Water Absorption C373	DCOF ANSI A137.1	Scratch Hardness MOHS	Shade Variation Rating
Results*	III	>250 lbf	Resistant	<0.5%	> 0.55	7	Check Website



- Sustainability Attributes

 Red List Free
 Health Product Declaration (HPD) provided upon request
 Product Packaging is 100% recyclable



The charm of tactile natural fabrics meets the performance benefits of porcelain tile with $\mathsf{Jute}^\mathsf{TM}$. As a material, jute is versatile and sustainable – and now that look translates to tile, which shares those same attributes, along with durability for both floors and walls. Cool colors create warm environs for any style at home.

JUTETM
Glazed Porcelain



LARCHMONT™ 4 Colors | 2 Sizes



RESIDENTIAL

COMMERCIAL

INDOOR

OUTDOOR

POOL





Brig





Rue Maison

Sizes 6"x35" 5.91"x35.43" 6"x24" 5.91"x23.72" 8.8mm Thickness 9mm 9 9 Faces Finish Matte Matte Edge Pressed ${\sf Pressed}$ **Grout Joint** 3/16" 3/16" Recommendation Abrasion Resistance Chemical Resistance DCOF ANSI Scratch Hardness Shade Variation Breaking Strength Water Absorption Testing Rating Results* IV >400 lbf < 0.5% >0.42 ۷з Resistant

Product and Installation Details | ANSI A108.02 Section 4.3.8.2 - For running bond/brick joing patterns utilizing tiles (square or rectangular) where the side being offset is greater than 18" (nominal dimension), the running bond offset will be a maximum of 33% unless otherwise specified by the tile manufacturer. If an offset greater than 33% is specified, specifier and owner must approve mock-up and lippage.





• Red List Free

- ٠ ١
- Health Product Declaration (HPD) provided upon req
- Product Packaging is 100% recyclable

 $\label{eq:large_large_large} Larchmont^{\tiny{\mathsf{TM}}} \text{ embodies the earthy aesthetic of natural wood in a durable porcelain tile.}$ Warm hues create an inviting atmosphere in a traditional wood plank size.

LARCHMONT™ Glazed Porcelain



FLOOR / WALL

RESIDENTIAL

COMMERCIAL

INDOOR

OUTDOOR

POOL



White



Sand





Havana



Brown

Sizes							
		8"x47" 7.83"x47.01"					
Thickness		9mm					
Faces		20					
Finish		Matte					
Edge		Rectified					
Grout Joint Recommendation		5/64"					
Testing	Abrasion Resistance C1027	Breaking Strength C648	Chemical Resistance C650	Water Absorption C ₃₇₃	DCOF ANSI A137.1	Scratch Hardness MOHS	Shade Variation Rating
Results*	III	>350 lbf	Resistant	<0.50%	>0.42	6	V3
Sustainahility Att	4.1						

Product and Installation Details | ANSI A108.02 Section 4.3.8.2 - For running bond/brick joing patterns utilizing tiles (square or rectangular) where the side being offset is greater than 18" (nominal dimension), the running bond offset will be a maximum of 33% unless otherwise specified by the tile manufacturer. If an offset greater than 33% is specified, specifier and owner must approve mock-up and lippage.





- VOC Free
 Recycled Content 40% Pre & Post-Consumer



Inspired by rustic wood, Legacy $^{\text{\tiny TM}}$ is a glazed porcelain series available in earthy colors and a trending plank format.





Legacy™ | Sand





Capri





Manza Ulivo

Sizes							
	23"×47 23.46"×47.	01"	12"x23" _{11.69"x23.46"}	3"x12" Floor SBN			
Thickness	9mm		9mm	9mm			
Faces	16		28	N/A			
Finish	Matte	>	Matte	Matte			
Edge	Rectifie	ed	Rectified	Rectified			
Grout Joint ecommendation	1/8"		1/8"	1/8"			
Testing	Abrasion Resistance C1027	Breaking Strength C648	Chemical Resistance C650	Water Absorption C373	DCOF ANSI A137.1	Scratch Hardness MOHS	Shade Variation Rating
Results*	III	>250 lbf	Resistant	<0.50%	>0.60	7	V ₂

Product and Installation Details | ANSI A108.02 Section 4.3.8.2 - For running bond/brick joing patterns utilizing tiles (square or rectangular) where the side being offset is greater than 18' (nominal dimension), the running bond offset will be a maximum of 33% unless otherwise specified by the tile manufacturer. If an offset greater than 33% is specified, specifier and owner must approve mock-up and lippage.





- Red List Free
 - Health Product Declaration (HPD) provided upon request
- Product Packaging is 100% recyclable





Named for the most modern city in the historic Tuscan region of Italy, the Livorno $^{\mathsf{TM}}$ collection of porcelain tile evokes the beauty of watercolors with its muted palette and subtle veining. Available in two sizes, it's a perfect complement for a modern design aesthetic with its nod to urban sophistication.

LIVORNOTM Glazed Porcelain





Arden



Dover



Hester

		9"x36"					
		8.96"x36.02"					
Thickness		9.2mm					
Faces		6					
Finish		Matte					
Edge		Pressed					
Grout Joint Recommendation		3/16"					
	Abrasion Resistance C1027	Breaking Strength C648	Chemical Resistance C650	Water Absorption C373	DCOF ANSI A137.1	Scratch Hardness MOHS	Shade Variation Rating
Results*	Check Website	>350	Resistant	<0.5%	>O.42	7	V1

Product and Installation Details | ANSI A108.02 Section 4.3.8.2 - For running bond/brick joing patterns utilizing tiles (square or rectangular) where the side being offset is greater than 18" (nominal dimension), the running bond offset will be a maximum of 33% unless otherwise specified by the tile manufacturer. If an offset greater than 33% is specified, specifier and owner must approve mock-up and lippage.










Lynbrook™ channels the beauty of nature with the benefits of tile. This elegant series pays attention to every detail, from the meticulous duplication of graining to the three sophisticated colors available. This wood-look tile brings nature indoors and turns any room into a warm and cozy retreat.

LYNBROOKTM Glazed Porcelain



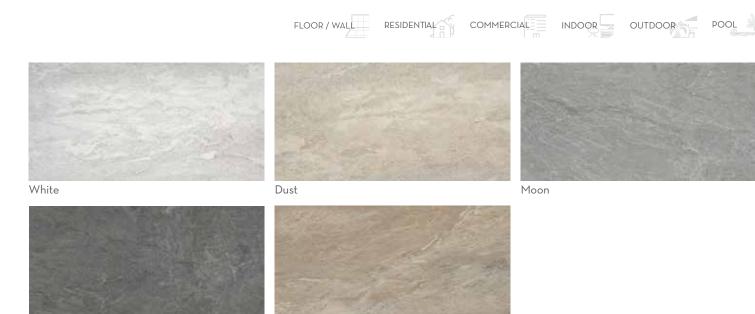

Taupe

Gray

Gray Taupe Mosaics



Available in Size 20"x40." MOQ and lead times apply. Consult your local rep for more information.

Sizes	24"×47" 23.62"×47.24"	12"x2 11.81"x23	4" 5.62"	12"x12" M 11.81"x11.8	esh	3"x12" Floor SBN] v		
Thickness	10mm	9mr	n	9.5mm	١	10mm			
Faces	5	20-2	4	N/A		N/A			
Finish	Matte	Matt	ie.	Matte		Matte			
Edge	Rectified	Rectif	ied	Cut		Cut/Roun	ded		
Grout Joint Recommendation	1/8"	1/8'	,	1/16"		5/64"			
Testing	Abrasion Resistance C1027	Breaking Strength C648	Chemica C650	al Resistance	Water A	Absorption	DCOF ANSI A137.1	Scratch Hardner MOHS	ss Shade Variation Rating
Results*	IV	>350 lbf	Resistant	t	<u><</u> 0.50%		>0.60	7	V2

Product and Installation Details | ANSI A108.02 Section 4.3.8.2 - For running bond/brick joing patterns utilizing tiles (square or rectangular) where the side being offset is greater than 18" (nominal dimension), the running bond offset will be a maximum of 33% unless otherwise specified by the tile manufacturer. If an offset greater than 33% is specified, specifier and owner must approve mock-up and lippage.











Milestone $^{\mathsf{T}}$ embodies the natural elements of slate produced in glazed body match porcelain. Milestone $^{\mathsf{T}}$ is offered in versatile colors and texture variations for a natural aesthetic.

MILESTONE™

Glazed Body Match Porcelain



FLOOR / WALL

RESIDENTIAL

COMMERCIAL

INDOOR

OUTDOOR

POOL



Hikari



Daku




Shiro



Gure



Oxford

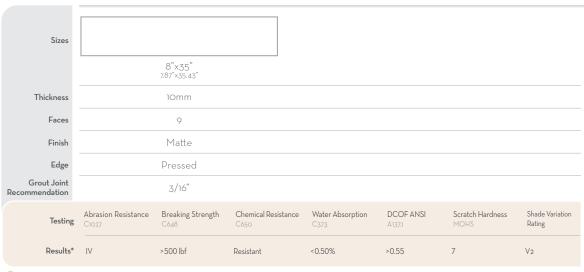


Product and Installation Details | ANSI A108.02 Section 4.3.8.2 - For running bond/brick joing patterns utilizing tiles (square or rectangular) where the side being offset is greater than 18" (nominal dimension), the running bond offset will be a maximum of 35% unless otherwise specified by the tile manufacturer. If an offset greater than 33% is specified, specifier and owner must approve mock-up and lippage.





- Ded List Free
- Health Product Declaration (HPD) provided upon reques
- Product Packaging is 100% recyclable
- VOC Free
- Recycled Content 0%
 - ost-Consumer

Mokuzai II™ captures a timber-inspired design in a porcelain tile. Through high-definition printing, vivid detail is used to achieve appealing wood tones in large format planks.



Glazed Porcelain





















Ivory

River Ivory (12"x24")

River Gray (12"x24")

Mosaics







Ivory

Gray

Charcoal

Enhance Collection | R11 Anti-Slip Finish







Ivory, Gray, and Charcoal

Available in Size 12"x23." MOQ and lead times apply. Consult your local rep for more information.

Sizes]				
	23"×47" 23.43"×46.99"	12"x23 11.65"x23		12"x12" Mesh 11.81"x11.81"	3"x12" Floor SBN		Cove Ba	ase	Cove Bas Corner O	
Thickness	10mm	9mm		9mm	9mm		Chec Websi		Checl Websit	
Faces	21	84		N/A	N/A		N/A		N/A	
Finish	Matte	Matte	9	Matte	Matte		Matt	е	Matte	:
Edge	Rectified	Rectifie	ed	Cut	Cut/Round	ded	Cut/Rou	nded	Cut/Rour	nded
Grout Joint Recommendation	3/16"	3/16"		3/16"	3/16"		3/16	,	3/16"	
Testing	Abrasion Resistance C1027	Breaking Strength C648	Chemic C650		Water Absorption C373	DC0 A137	OF ANSI	Scrato MOHS	h Hardness	Shade Variation Rating
Results*	IV	>450 lbf	Resistan	t	<0.50%	>0.6	0	7		V3

Product and Installation Details | ANSI A108.02 Section 4.3.8.2 - For running bond/brick joing patterns utilizing tiles (square or rectangular) where the side being offset is greater than 18" (nominal dimension), the running bond offset will be a maximum of 33% unless otherwise specified by the tile manufacturer. If an offset greater than 33% is specified, specifier and owner must approve mock-up and lippage.







Mood[™] is reminiscent of the quartzite stone from Vals, in the canton of the Grisons, Switzerland, translated into a durable porcelain tile. Offered in large scale format and trendy hues, Mood is designed for those who want to surround themselves with natural beauty.





FLOOR / WALL

RESIDENTIAL







Ivory



Silver



Product and Installation Details | ANSI A108.02 Section 4.3.8.2 - For running bond/brick joing patterns utilizing tiles (square or rectangular) where the side being offset is greater than 18" (nominal dimension), the running bond offset will be a maximum of 33% unless otherwise specified by the tile manufacturer. If an offset greater than 33% is specified, specifier and owner must approve mock-up and lippage.





Moriyo™ offers a clean and stylish look that captures the subtle beauty of natural wood in a durable ceramic tile. The soft grain and neutral color palette makes an elegant, yet relaxed, statement. Offered in an 8x24 plank, this Nordic inspired beauty will make a timeless design statement in any setting.





LARGE FORMAT

FLOOR / WALL

RESIDENTIAL

COMMERCIAL

INDOOR


POOL 3





White



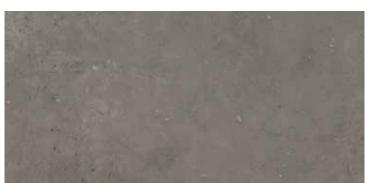

Gray

Taupe



Silver, Gray, and Taupe

Available in Size 24"x24." MOQ and lead times apply. Consult your local rep for more information.

Sizes	63"x126" 62.85"x125.79"	31"x31" 31.39"x31.39"	23"×47" 23.46'×47.01"	12"x23" 11.69"x23.46"	3"x12" Floor SBN	6"x13" Cove Base Cove	1"x6" Base Corner Out
Thickness	6mm	9mm	9mm	9mm	9mm	9mm	9mm
Faces	3	24	10	30	N/A	N/A	N/A
Finish	Matte	Matte	Matte	Matte	Matte	Matte	Matte
Edge	Rectified	Rectified	Rectified	Rectified	Cut	Cut	Cut
Grout Joint Recommendation	1/8"	1/8"	1/8"	1/8"	1/8"	1/8"	1/8"
Testing	Abrasion Resistance C1027	Breaking Strength C648	Chemical Resistance C650	Water Absorption C373	DCOF ANSI A137.1	Scratch Hardness MOHS	Shade Variation Rating
Results*	III	>500 lbf	Resistant	<0.50%	>0.60	7	V ₂

Product and Installation Details | ANSI A108.02 Section 4.3.8.2 - For running bond/brick joing patterns utilizing tiles (square or rectangular) where the side being offset is greater than 18" (nominal dimension), the running bond offset will be a maximum of 33% unless otherwise specified by the tile manufacturer. If an offset greater than 33% is specified, specifier and owner must approve mock-up and lippage.








Network $^{\text{TM}}$ is a recreation of concrete with an industrial, avant-garde look. Offered in large format sizes and stunning hues, Network $^{\text{TM}}$ is sure to create a bold statement.

NETWORKTM Glazed Porcelain



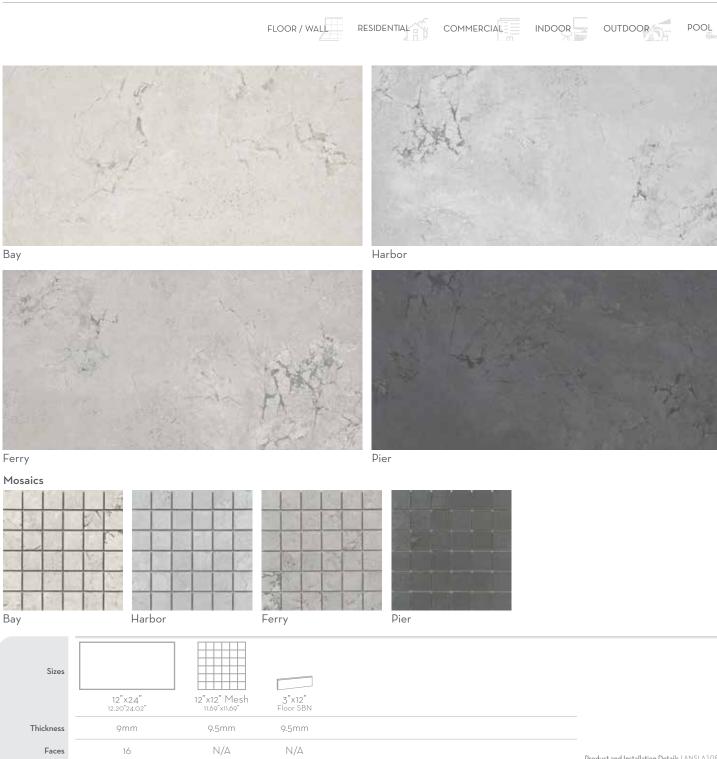

Sustainability Attributes

Finish

Edge

Testing

Results*

Grout Joint

Recommendation

- Ded List Ere
- Health Product Declaration (HPD) provided upon request

Abrasion Resistance

Matte

Pressed

3/16"

- Product Packaging is 100% recyclable
- VOC Free

Resistant

Matte

Cut

3/16"

Recycled Content 0%

Chemical Resistance

Matte

Cut/Rounded

3/16"

Water Absorption

<0.50%

DCOF ANSI

>0.42

Scratch Hardness

Shade Variation

Rating

V2

Pre & Post-Consumer

*For more information visit www.emser.com. Always consult a professional for proper usage and installation.

Breaking Strength

>350 lbf

Product and Installation Details | ANSI A108.02 Section 4.3.8.2 - For running bond/brick joing patterns utilizing tiles (square or rectangular) where the side being offset is greater than 18" (nominal dimension), the running bond offset will be a maximum of 33% unless otherwise specified by the tile manufacturer. If an offset greater than 33% is specified, specifier and owner must approve mock-up and lippage.



Newport[™] artfully blends the look of marble and concrete, creating a notable design aesthetic. Cool undertones highlight the trending industrial look of spaces.

NEWPORTTM Glazed Porcelain







Legend






Saga

Novel

Epic

Sizes	18"×18" 17.72 [*] ×17.72"						
Thickness	9mm						
Faces	5						
Finish	Matte						
Edge	Pressed						
Grout Joint Recommendation	1/16"						
Testing	Abrasion Resistance C1027	Breaking Strength C648	Chemical Resistance C650	Water Absorption C373	DCOF ANSI A137.1	Scratch Hardness MOHS	Shade Variation Rating
Results*	IV	>375 lbf	Resistant	3.0 - 7.0%	>0.42	6	V1



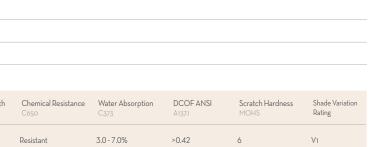



- Apply grout directly over the scored tile lines. Fusion Pro grout is recommended.
- Scored lines have a grout width of 1/16".
- Gives the impression of a 9"x9" tile install.
- Great for walls and backsplash applications!

A traditional look takes on a modern flare with Nostalgia™. The design harkens back to when skilled artisans hand painted tiles. The 18″x18″ pre-scored size combines old world craftmanship with modern technology providing an easy-to-install designer look.

NOSTALGIA™

Glazed Ceramic



















White

Gray



Blue

Mosaics







>0.50

V3

White

Gray

Blue

Sizes	12"x24" 11.81"x23,62"	12"x12" Mesh 11.81"x11.81"	3"x24" Floor SBN			
Thickness	8.5mm	8.5mm	8.5mm			
Faces	18	N/A	N/A			
Finish	Matte	Matte	Matte			
Edge	Pressed	Cut	Cut/Rounded			
Grout Joint Recommendation	3/16"	3/16"	3/16"			
Testing	Abrasion Resistance	Breaking Strength Chemica C648 C650	Resistance Water Absorpt	ion DCOF ANSI A137.1	Scratch Hardness MOHS	Shade Variation Rating

Product and Installation Details | ANSI A108.02 Section 4.3.8.2 - For running bond/brick joing patterns utilizing tiles (square or rectangular) where the side being offset is greater than 18" (nominal dimension), the running bond offset will be a maximum of 35% unless otherwise specified by the tile manufacturer. If an offset greater than 33% is specified, specifier and owner must approve mock-up and lippage.





Results* |||

>350 lbf



<0.50%

Resistant



Offered in soothing, cool tones, Nova[™] recreates the classic look of natural stone in a glazed porcelain tile. The soft veining and tonal variation creates depth and textural interest in any application.





RESIDENTIAL

COMMERCIAL

INDOOR

POOL







Eclipse Astra Luna

Mosaics



Sizes	20"X20" 20.04"X20.04"	12"×24" 11.93"×24.02"	12"x12" Mesh	3"x12" Floor SBN			
Thickness	9mm	9mm	9mm	9mm			
Faces	8	8	N/A	N/A			
Finish	Matte	Matte	Matte	Matte			
Edge	Pressed	Pressed	Cut	Cut/Rounded			
Grout Joint Recommendation	3/16"	3/16"	1/8"	1/8"			
Testing	Abrasion Resistance C1027	Breaking Strength Chemica C648 C650	Resistance Water	Absorption DCOF ANSI	Scratch Hardness MOHS	Shade Variation Rating	

>0.42

Results* |||

Resistant

<0.5%

Sustainability Attributes

Red List Free
Health Product Declaration (HPD) provided upon request
Product Packaging is 100% recyclable

>350 lbf

Novales[™] celebrates subtly with a texture reminiscent of a smoothly weathered stone look, or even, as the color names suggest, the well-loved pages of a favorite book. It's a reminder of the beauty that exists in imperfection. And at the same time syncs with the demand for neutrals for both floors and walls.

NOVALESTM Glazed Porcelain








Dawn



Sunrise



Evening

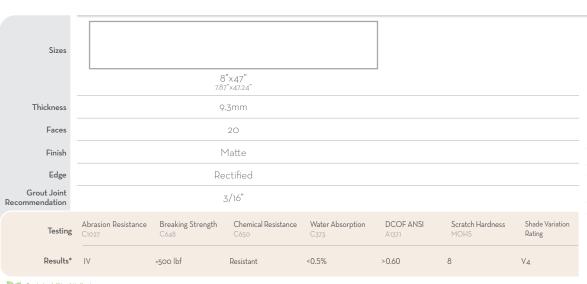

Product and Installation Details | ANSI A108.02 Section 4.3.8.2 - For running bond/brick joing patterns utilizing tiles (square or rectangular) where the side being offset is greater than 18" (nominal dimension), the running bond offset will be a maximum of 33% unless otherwise specified by the tile manufacturer. If an offset greater than 33% is specified, specifier and owner must approve mock-up and lippage.





- Ded List Ere
- Health Product Declaration (HPD) provided upon reques
- Product Packaging is 100% recyclable
- VOC Free
- Recycled Content 0%



Orchard™ offers the beautiful timeless look of hardwood in stylish colors with the added benefits of porcelain. The graphic details of the warm, earthy colors achieve realistic wood textures in a modish plank size.

ORCHARD™ Glazed Porcelain







Blue












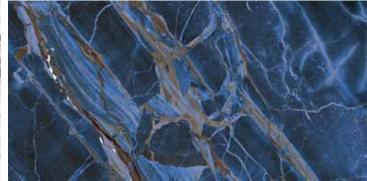

Astral



Brown White

Enhance[™] Collection














Blue, Brown, Cold, and White | Parkview[™] Outline

Available in Size 24"x47." MOQ and lead times apply. Consult your local rep for more information.

Astral and Brown | Parkview Expanse
Available in Size 47"x102." MOQ and lead times apply.

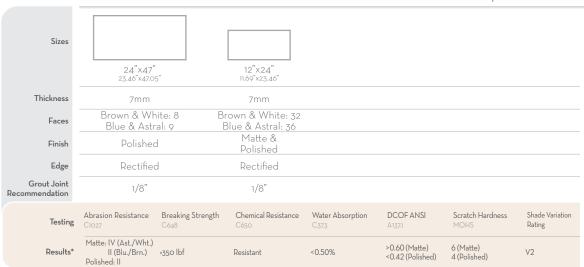

Polished Not Recommended for Use as Commercial Wet Area Flooring or Outdoor Flooring

Product and Installation Details | ANSI A108.02 Section 4.3.8.2 - For running bond/brick joing patterns utilizing tiles (square or rectangular) where the side being offset is greater than 18" (nominal dimension), the running bond offset will be a maximum of 33% unless otherwise specified by the tile manufacturer. If an offset greater than 33% is specified, specifier and owner must approve mock-up and lippage.






- Ded List Free
 - lealth Product Declaration (HPD) provided upon request
- Product Packaging is 100% recyclable
- VOC Free



Inspired by the world's finest marbles, Parkview[™] offers traditional marble looks with classic whites and the deepest blacks as well as unconventional marbles with its deep, rich cobalt blue. Each unique tile is enhanced by contrasting veining and striking golds.

PARKVIEWTM Glazed Porcelain



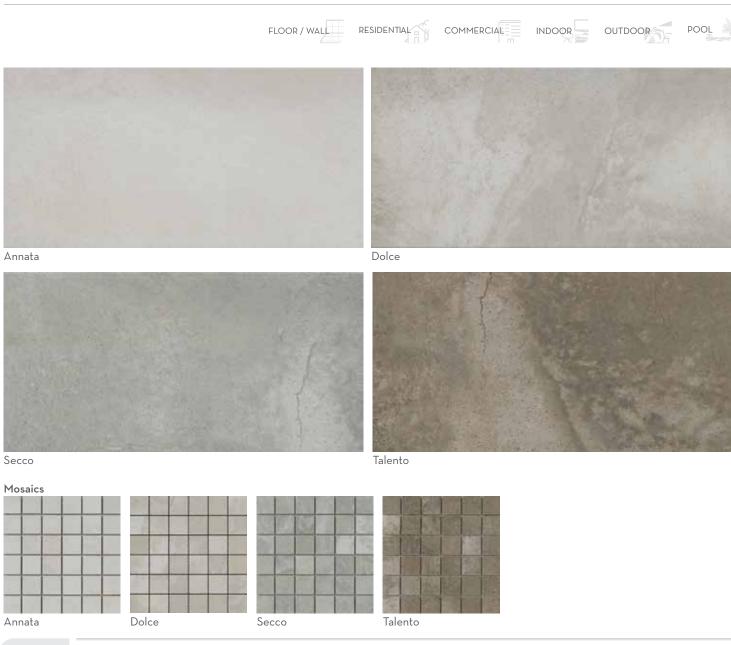

Sizes	24"x24" 23.62"x23.62"	12"x24" 11.81"x23.62"	12"X12" Mesh	3"x12" Floor SBN			
Thickness	10.5mm	10mm	8.5mm	10mm			
Faces	8	11	N/A	20			
Finish	Matte	Matte	Matte	Matte			
Edge	Pressed	Pressed	Cut	Cut/Rounded			
Grout Joint Recommendation	3/16"	3/16"	3/16"	3/16"			
Testing	Abrasion Resistance C1027	Breaking Strength C648	Chemical Resistance C650	Water Absorption C373	DCOF ANSI A137.1	Scratch Hardness MOHS	Shade Variation Rating
Results*	IV	>400 lbf	Resistant	<0.50%	>0.42	6	V2

Product and Installation Details | ANSI A108.02 Section 4.3.8.2 - For running bond/brick joing patterns utilizing tiles (square or rectangular) where the side being offset is greater than 18" (nominal dimension), the running bond offset will be a maximum of 33% unless otherwise specified by the tile manufacturer. If an offset greater than 33% is specified, specifier and owner must approve mock-up and lippage.





Red List Free

- VOC Fr
- Product Packaging is 100% recyclable

Looking for a design moment? Look no further than Pienza™. Named after a glorious Tuscan town, the collection delivers a sophisticated look for the home. Four neutral colorways offer depth, texture and unique looks.



















Smoke



Oak



Gray

Sizes							
		6"x36" 5.91"x35.43"			6"x24" 5.91"x23.62"		
Thickness		10mm			10.5mm		
Faces		20			20		
Finish		Matte			Matte		
Edge		Pressed			Pressed		
Grout Joint Recommendation		3/16"			3/16"		
Testing	Abrasion Resistance C1027	Breaking Strength C648	Chemical Resistance C650	Water Absorption C373	DCOF ANSI A137.1	Scratch Hardness MOHS	Shade Variation Rating
Results*	IV	>250 lbf	Resistant	<0.50%	>0.60	7	V2

Product and Installation Details | ANSI A108.02 Section 4.3.8.2 - For running bond/brick joing patterns utilizing tiles (square or rectangular) where the side being offset is greater than 18" (nominal dimension), the running bond offset will be a maximum of 33% unless otherwise specified by the tile manufacturer. If an offset greater than 33% is specified, specifier and owner must approve mock-up and lippage.





- Ded List Free
- Health Product Declaration (HPD) provided upon reques
- Product Packaging is 100% recyclable
- VOC Free
- Recycled Content 0%

Pocono $^{\text{TM}}$ mimics the unique gradations and variances found in natural wood. This series is offered in sizes inspired by natural wood flooring and durable glazed porcelain.


POCONOTM Glazed Porcelain



than 33% is specified, specifier and owner must

ommended 33% Offset*

approve mock-up and lippage.

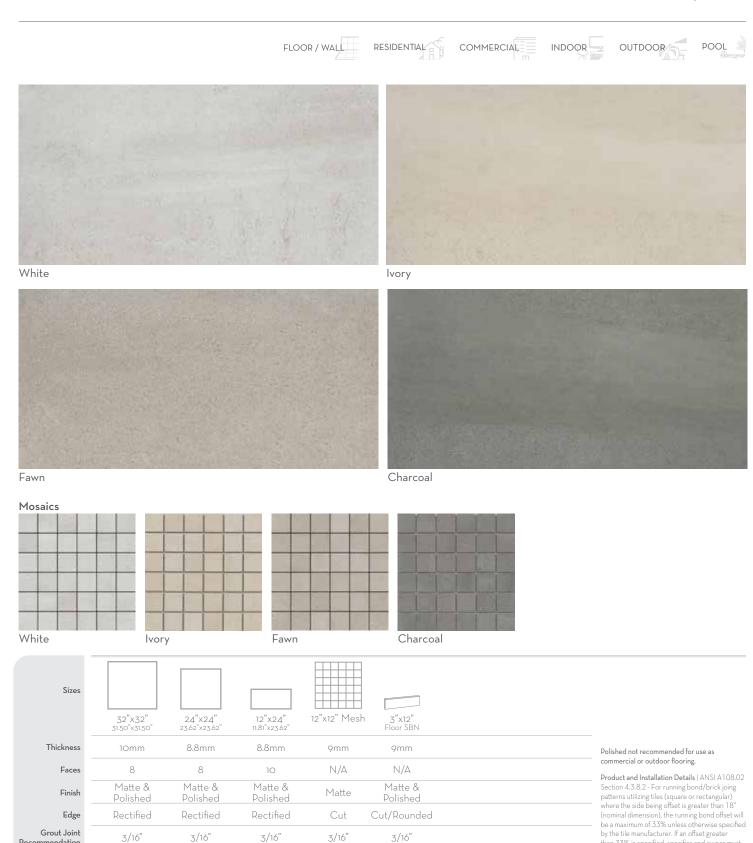

Sustainability Attributes

Testing

Results*

Recommendation

Resistant

Chemical Resistance

Water Absorption

<0.50%

DCOF ANSI

>0.42 (Matte)

<0.42 (Polished)

Scratch Hardness

7 (Matte) 6 (Polished)

Shade Variation

Rating

٧3

Abrasion Resistance

 * For more information visit www.emser.com. Always consult a professional for proper usage and installation.

Breaking Strength

>550 lbf


Porto II^{TM} is inspired by the simplistic look of concrete and stone in large format sizes and a range of colors. Available in matte or polished, Porto II is ideal for both residential and commercial spaces.

PORTO IITM Glazed Porcelain



by the tile manufacturer. If an offset greater than 33% is specified, specifier and owner must approve mock-up and lippage.

Recommended 33% Offset*

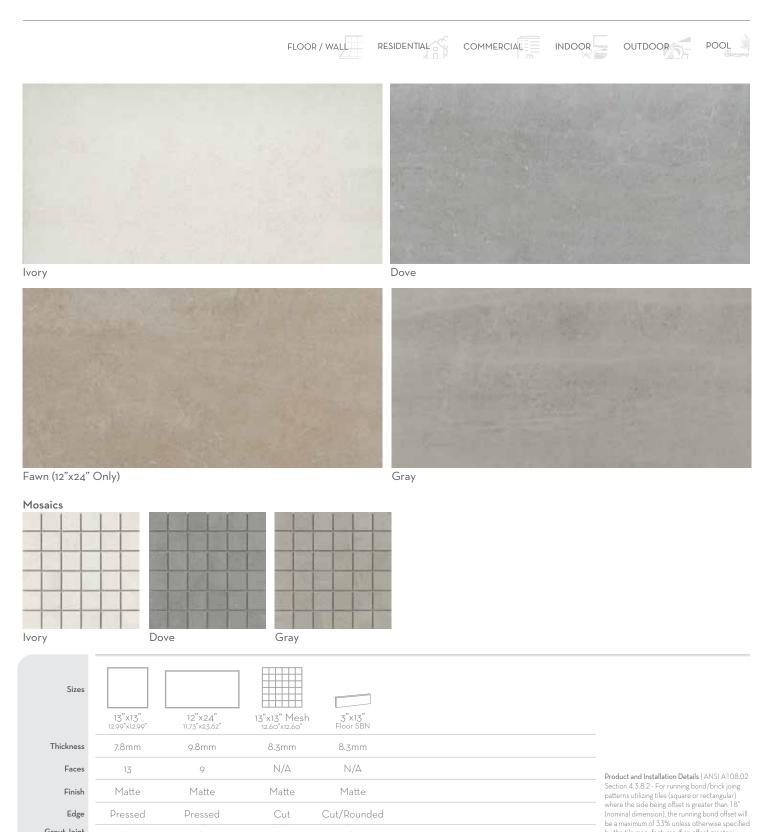

Sustainability Attributes

Edge

Testing

Results*

Grout Joint

Recommendation

 ${\sf Pressed}$

3/16"

Abrasion Resistance

Cut

5/32"

Chemical Resistance

Cut/Rounded

3/16"

Water Absorption

<0.50%

DCOF ANSI

>0.60

Scratch Hardness

Shade Variation

Rating

٧з

Resistant

 * For more information visit www.emser.com. Always consult a professional for proper usage and installation.

Pressed

3/16"

Breaking Strength

>350 lbf

Potenza[™] embodies the earthy aesthetic of travertine in a durable porcelain tile. The linear brushed look creates a harmonious flow in a variety of colors.

POTENZATM Glazed Porcelain



FLOOR / WALL

















Cruz

Mill



Fermi



Pascal

Available in Matte and Polished Finish

Sizes	24"x24" 23.58"x23.58"	12"×24" 11.73"×23.58"	12"X12" Mesh 3"x6" Offset	3"x12" Floor SBN	δ"x Cove	:12" Base]"x6" se Corner Out
Thickness	8mm	8mm	Check Website	Check Website	e Check \	Website	Chec	k Website
Faces	64	128	N/A	N/A	N,	N/A		N/A
Finish	Matte & Polished	Matte & Polished	Matte	Matte & Polished	Ma	tte		Matte
Edge	Rectified	Rectified	Cut	Cut/Rounded	Cut/Ro	ounded	Cut/	'Rounded
Grout Joint Recommendation	1/8"	1/8"	Check Website	Check Website	e Check	Website	Chec	k Website
Testing	Abrasion Resistance C1027	Breaking Strength C648	Chemical Resistance C650	Water Absorption C373	DCOF ANSI A137.1	Scratch Ha MOHS	ırdness	Shade Variation Rating
Results*	Ш	>350 lbf	Resistant	<0.5%	>0.55 (Matte) <0.42 (Polished)	7		V1

Product and Installation Details | ANSI A108.02 Section 4.3.8.2 - For running bond/brick joing patterns utilizing tiles (square or rectangular) where the side being offset is greater than 18" (nominal dimension), the running bond offset will be a maximum of 33% unless otherwise specified by the tile manufacturer. If an offset greater than 33% is specified, specifier and owner must approve mock-up and lippage.









Prodigy[™] is pure sophistication, with a nod to the beauty of nature stone looks. Outstanding in every way, this USA made collection is a fitting complement no matter the space or design aesthetic. It provides the foundation for any project seeking style.

PRODIGY™

Glazed Porcelain



FLOOR / WALL

COMMERCIAL

RESIDENTIAL

INDOOR





Bosso






Cedro Olmo

Sizes 7"x22" 7.13"x21.68" Thickness 8.9mm 12 Faces Matte Finish Edge Pressed **Grout Joint** 3/16" Recommendation Abrasion Resistance Breaking Strength C648 Shade Variation Chemical Resistance DCOF ANSI Scratch Hardness Water Absorption Testing Rating Results* Ш >350 lbf ۷з Resistant <7.0% >0.42

Product and Installation Details | ANSI A108.02 Section 4.3.8.2 - For running bond/brick joing patterns utilizing tiles (square or rectangular) where the side being offset is greater than 18" (nominal dimension), the running bond offset will be a maximum of 33% unless otherwise specified by the tile manufacturer. If an offset greater than 33% is specified, specifier and owner must approve mock-up and lippage.



Sustainability Attributes

- ${}^*\!For more information visit www.emser.com. Always consult a professional for proper usage and installation.$

Ravenna provides the warmth and authentic look of wood with the durability of tile. The subtle color palette ranges from cool to warm and perfectly showcases the fine grain design. Inspired by the Nordic style this classic wood look tile is sure to create a cozy and inviting space.

RAVENNA™ Glazed Ceramic





RESIDENTIAL

COMMERCIAL

INDOOR

OUTDOOR

POOL





Assembly

District



Domain





Assembly

District

Domain

Sizes	13"x13" 12,99"x12,99"	12"x24" 11.81"x23.62"	13"x13" Mesh	3"x13" Floor SBN			
Thickness	7.2mm	9.8mm	8mm	8mm			
Faces	11	10	N/A	N/A			
Finish	Matte	Matte	Matte	Matte			
Edge	Pressed	Pressed	Cut C	ut/Rounded			
Grout Joint Recommendation	3/16"	3/16"	3/16"	3/16"			
Testing	Abrasion Resistance C1027	Breaking Strength C648	Chemical Resistano C650	ce Water Absorption C373	DCOF ANSI A137.1	Scratch Hardness MOHS	Shade Variation Rating
Results*	IV	>350 lbf	Resistant	<0.50%	>0.42	7	V ₃

Product and Installation Details | ANSI A108.02 Section 4.3.8.2 - For running bond/brick joing patterns utilizing tiles (square or rectangular) where the side being offset is greater than 18" (nominal dimension), the running bond offset will be a maximum of 33% unless otherwise specified by the tile manufacturer. If an offset greater than 33% is specified, specifier and owner must approve mock-up and lippage.





- Ded List Free
- Health Product Declaration (HPD) provided upon request
- Product Packaging is 100% recyclable
- VOC Free
- Recycled Content 0%

*For more information visit www.emser.com. Always consult a professional for proper usage and installation.

Realm II^{TM} mirrors traditional honed marble with subtle veining and refined movement. Sophisticated colors with crackled and distressed details lend a natural aesthetic. A matte finish and various tile sizes make Realm Π^{M} ideal for numerous interiors.





RESIDENTIAL

COMMERCIAL







Court

Patio





Wynd

Sizes	18"×18"						
Thickness	10.5mm						
Faces	1						
Finish	Matte						
Edge	Pressed						
Grout Joint Recommendation	1/16"						
Testing	Abrasion Resistance C1027	Breaking Strength C648	Chemical Resistance C650	Water Absorption C373	DCOF ANSI A137.1	Scratch Hardness MOHS	Shade Variation Rating
Results*	IV	>375 lbf	Resistant	3.0% - 7.0%	>0.42	6	V1
Contain de litte Au	ed a						



Scored Tile

- Pre-scoring provides a consistent design and easy installation.
- Apply grout directly over the scored tile lines. Fusion Pro grout is recommended.
- Scored lines have a grout width of 1/16".
- Gives the impression of a 9"x9" tile install.
- Great for walls and backsplash applications!



- Ded List Ere
- Health Product Declaration (HPD) provided upon reques
- Product Packaging is 100% recyclable
- VOC Free
- Recycled Content 7-10%
 - re-Consumer

Celebrating classic patterns of the past with a modern twist - that's the beauty of Reminisce $^{\text{TM}}$. The collection offers an eclectic group of designs, providing a wide array of solutions for any space. A kaleidoscope of shapes and color delivers a statement that stands the test of time.

REMINISCETM Glazed Ceramic



















Alto Manu



Pampa

Mosaics








Manu Pampa

Sizes	13"x13" 12.99"x12.99"	12"x24" 11.81"x23,62"	13"x13" Mesh	3"x13" Floor SBN	
Thickness	7.8mm	9mm	9mm	7.5mm	
Faces	47	37	N/A	N/A	
Finish	Matte	Matte	Matte	Matte	
Edge	Pressed	Pressed	Cut	Cut/Rounded	
Grout Joint Recommendation	3/16"	3/16"	3/16"	3/16"	

Testing	Abrasion Resistance	Breaking Strength	Chemical Resistance	Water Absorption	DCOF ANSI	Scratch Hardness	Shade Variation
	C1027	C648	C650	C373	A137.1	MOHS	Rating
Results*	IV	>400 lbf	Resistant	<0.50%	>0.60	7	V3

Product and Installation Details | ANSI A108.02 Section 4.3.6.2 - For running bond/brick joing patterns utilizing tiles (square or rectangular) where the side being offset is greater than 18' (nominal dimension), the running bond offset will be a maximum of 33% unless otherwise specified by the tile manufacturer. If an offset greater than 33% is specified, specifier and owner must approve mock-up and lippage.






- Ded List Free
- Health Product Declaration (HPD) provided upon request
- Product Packaging is 100% recyclable
- VOC Free
- Recycled Content 0%

Showcasing the complex veining of rare marble, Reserva $^{\!\scriptscriptstyle\mathsf{TM}}$ brings to life the timeless look with multiple sizes and stunning colors.

RESERVATM Glazed Porcelain



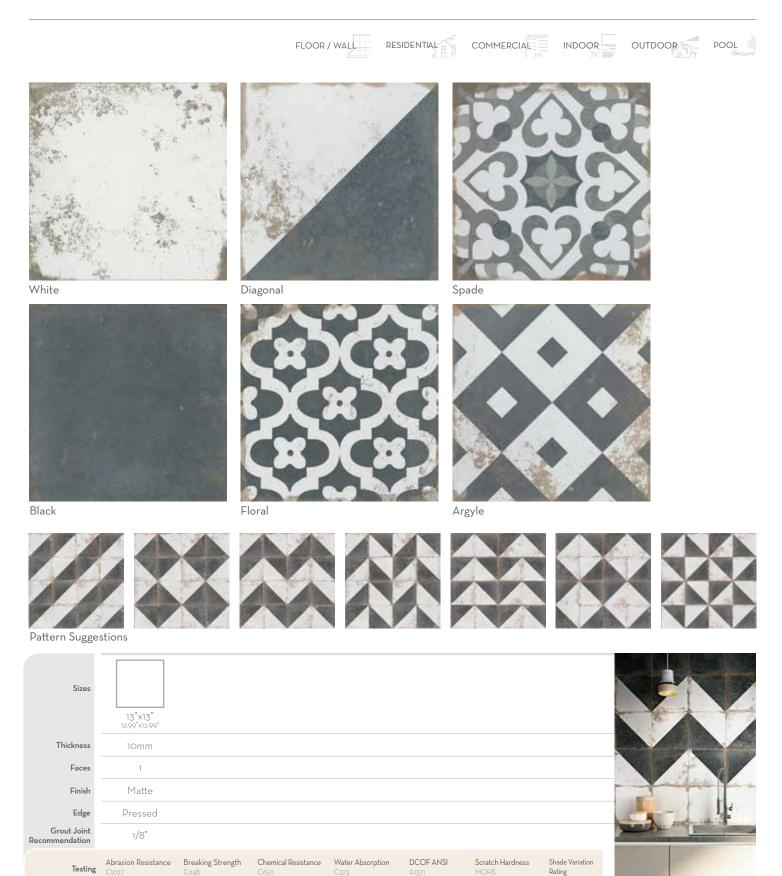



Results*

- Red List Fre
- Health Product Declaration (HPD) provided upon request
- Product Packaging is 100% recyclable
- VOC Free

Resistant

Recycled Content 0%

<0.50%

>0.60


V2

>400 lbf

With Rhapsody®, the design possibilities are endless. Create a classic black and white checkered pattern or utilize any combination of the solids and patterns to create your own masterpiece. The alluring distressed finish makes a statement in any room.

RHAPSODY® Glazed Porcelain



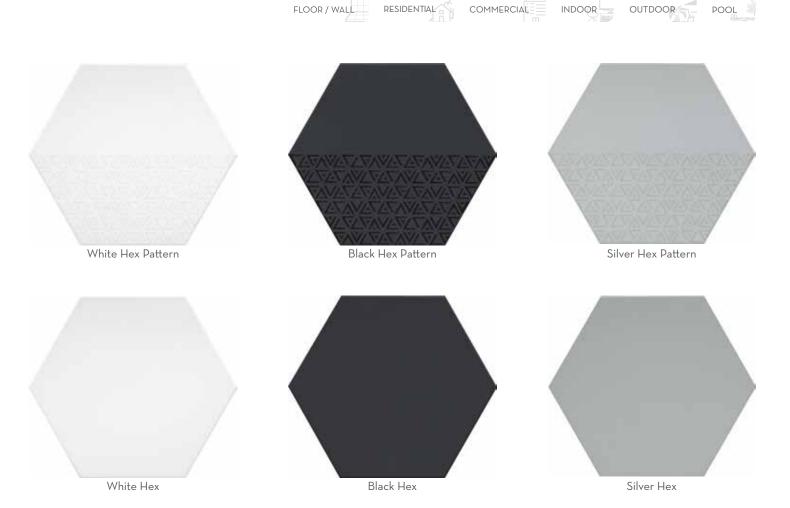

Pattern tiles not recommended for commercial floor applications.





Red List Free

- · request
- Product Packaging is 100% recyclable

Rhythm[™] creates a stunning look in your space with its geometric shape and unique design detail. Available in Black, White, and Silver and in solid or pattern designs, Rhythm brings new life to the traditional hex. Combine pattern tiles with solid and create a truly memorable, and design inspired look.

$RHYTHM^{m}$


Glazed Porcelain



SANCTUARY II™ 1 Color | 1 Size



Taupe

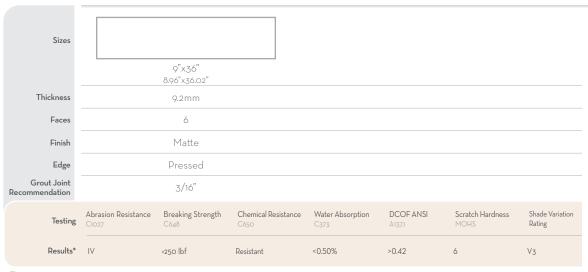

Product and Installation Details | ANSI A108.02 Section 4.3.8.2 - For running bond/brick joing patterns utilizing tiles (square or rectangular) where the side being offset is greater than 18" (nominal dimension), the running bond offset will be a maximum of 33% unless otherwise specified by the tile manufacturer. If an offset greater than 33% is specified, specifier and owner must approve mock-up and lippage.





- Ded List Ere
- Health Product Declaration (HPD) provided upon request
- Product Packaging is 100% recyclable
- VOC Free
- Recycled Content 40%
 - re-Consumer



Sanctuary II[™] reflects the simplistic beauty of natural wood grains in a durable glazed porcelain tile. A warm neutral with rustic undertones brings a quiet elegance for an inviting retreat. Subtle visual and tactile textures elongate surfaces for a versatile, sophisticated linear design.

SANCTUARY II™

Glazed Porcelain




FLOOR / WALL














Bianco

Bianco Fashion

Natural





Shard Flair

Sizes	18"x18" 17.72"x17.72"						
Thickness	10.5mm						
Faces	10						
Finish	Matte						
Edge	Pressed						
Grout Joint Recommendation	1/16"						
Testing	Abrasion Resistance C1027	Breaking Strength C648	Chemical Resistance C650	Water Absorption C373	DCOF ANSI A137.1	Scratch Hardness MOHS	Shade Variation Rating
Results*	III	>350 lbf	Resistant	<10.0%	>O.42	5	V ₂
Sustainability Att	ributes						



Scored Tile

- Pre-scoring provides a consistent design and easy installation.
- Apply grout directly over the scored tile lines. Fusion Pro grout is recommended.
- Scored lines have a grout width of 1/16".
- Gives the impression of a 9"x9" tile install.
- Great for walls and backsplash applications!



Design that comes alive - meet Señora™. The elegant Spanish styling marries perfectly with modern design providing a sophisticated look. The subtle colorways pay homage to Spanish style architecture and brings a touch of warmth to any space.

SEÑORATM Glazed Porcelain



















Luna

Mila



Zara

Mosaics



Sizes	31"x31" 31.30°x31.30°	24"×47" 23.50°×47.09°	12"x24" Matte	12"x24" Polished	12"x12" Mesh	12"x12" Mesh	3"x12" Floor SBN
Thickness	10mm	9mm	8mm	8mm	8mm	8mm	8mm
Faces	4	4	12	12	N/A	N/A	N/A
Finish	Matte & Polished	Matte & Polished	Matte	Polished	Polished	Matte	Matte & Polished
Edge	Rectified	Rectified	Pressed	Rectified	Cut	Cut	Cut/Rounded
Grout Joint Recommendation	1/8"	1/8"	3/16"	1/8"			
Testing	Abrasion Resistance C1027	Breaking Strength C648	Chemical Resistance C650	Water Absorption C373	DCOF ANSI A137.1	Scratch Hardness MOHS	Shade Variation Rating
Results*	IV (Matte) III (Polished)	>350 lbf (Matte) >250 lbf (Polished)	Resistant	<0.5%	>0.42 (Matte) <0.42 (Polished)	7 (Matte) 6 (Polished)	V2

Product and Installation Details | ANSI A108.02 Section 4.3.8.2 - For running bond/brick joing patterns utilizing tiles (square or rectangular) where the side being offset is greater than 18" (nominal dimension), the running bond offset will be a maximum of 33% unless otherwise specified by the tile manufacturer. If an offset greater than 33% is specified, specifier and owner must approve mock-up and lippage.





- Red List Free
- ation (HPD) provided upon request
- Product Packaging is 100% recyclable

Want to give your next design project a look of modern elegance? Serendra™ porcelain marble look tile provides a cool, rich and distinguished look that never goes out of style and is easy to maintain. The variations in each tile contribute to its distinctive appeal. Serendra comes in three colors and three sizes.

SERENDRATM Glazed Porcelain



RESIDENTIAL

COMMERCIAL










Contour



Profile Shadow

Mosaics









Contour

Figure

Profile

Shadow

Sizes	12"x24" 11.81°x23,62"	13"x13" Me	esh 3"x12" Floor SBN				
Thickness	9.8mm	9.8mm	9.7mm				
Faces	6	N/A	N/A				
Finish	Matte	Matte	Matte				
Edge	Pressed	Cut	Cut/Rounde	ed			
Grout Joint Recommendation	3/16"	3/16"	3/16"				
Testing	Abrasion Resistance C1027	Breaking Strength C648	Chemical Resistance C650	Water Absorption C373	DCOF ANSI A137.1	Scratch Hardness MOHS	Shade Variation Rating
Results*	III	>350 lbf	Not Resistant	<0.50%	>0.55	6	V ₃

Product and Installation Details | ANSI A108.02 Section 4.3.8.2 - For running bond/brick joing patterns utilizing tiles (square or rectangular) where the side being offset is greater than 18" (nominal dimension), the running bond offset will be a maximum of 35% unless otherwise specified by the tile manufacturer. If an offset greater than 33% is specified, specifier and owner must approve mock-up and lippage.





- ${}^*\!For more information visit www.emser.com. Always consult a professional for proper usage and installation.$

Inspired by the artistic blend of watercolors, Silhouette™ strides in with soft tones and linear flow creating an inviting environment.

SILHOUETTE™ Glazed Porcelain

















Cabrio

Firenza





Meriva

Sizes	20"x20" 1992'x1992" (Porcelain)	12"x2 11.93'x24 (Porcel	1.02"	12"X12" 12.05"x12.05" (Ceramic)	3"x12" Floor SBN		
Thickness	9mm	9mr	n	8mm	9mm		
Faces	6	6		6	N/A		
Finish	Matte	Matt	e	Matte	Matte		
Edge	Pressed	Press	ed	Pressed	Cut/Rounded		
Grout Joint Recommendation	3/16"	3/16	"	3/16"	3/16"		
Testing	Abrasion Resistance C1027	Breaking Strength C648	Chemical Resistance C650	Water Absorption C373	DCOF ANSI A137.1	Scratch Hardness MOHS	Shade Variation Rating
Results*	II III (Firenza)	>300 lbf >350 lbf (Firenza)	Resistant	<0.5%	>O.42	7	V2

Product and Installation Details | ANSI A108.02 Section 4.3.6.2 - For running bond/brick joing patterns utilizing tiles (square or rectangular) where the side being offset is greater than 18' (nominal dimension), the running bond offset will be a maximum of 33% unless otherwise specified by the tile manufacturer. If an offset greater than 33% is specified, specifier and owner must approve mock-up and lippage.






- Red List Free
- provided upon request
- Product Packaging is 100% recyclable
- *For more information visit www.emser.com. Always consult a professional for proper usage and installation.

The subtle movement and gentle veining of $\mathsf{Solara}^\mathsf{m}$ mirrors the beauty of natural marble. The neutral palette is sure to make any space warm and inviting. With all the subtle sophistication of marble, Solara is sure to elevate any design.

SOLARA™ Glazed Ceramic & Porcelain



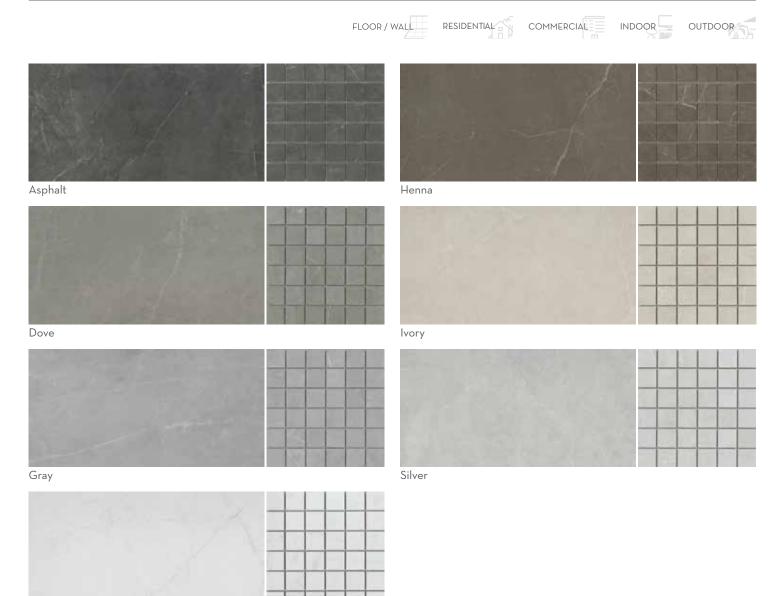

Henna only available in 12"x24" size. White

Sizes	24"x24" 23,62'x23,62'	24"x47" 23.62"x47.24"	12"x24" 11.81"x23.62"	8"x10" 8.46"x9.84"	13"x13" Mes 12.60"x12.60"	h 3"x12" Floor SBN	
Thickness	9.3mm	10.2mm	8.4mm	9mm	9mm	8.4mm	
Faces	12	6	12	Check Website	N/A	N/A	
Finish	Matte & Polished	Matte & Polished	Matte & Polished	Matte	Matte	Matte & Polished	
Edge	Rectified	Rectified	Rectified	Pressed	Cut	Cut/Round	
Grout Joint Recommendation	1/8"	1/8"	1/8"	Check Website	1/8"	1/8"	
Testing	Abrasion Resistance C1027	Breaking Strength C648	Chemical Resistance C650	Water Absorption C373	DCOF ANSI A137.1	Scratch Hardness MOHS	Shade Variation Rating
Results*	IV	>345 lbf	Resistant	<0.50%		7 (Matte) 3 (Polished)	V2 V3 (6"x12")

Sustainability Attributes

Product and Installation Details | ANSI A108.02 Section 4.3.8.2 - For running bond/brick joing patterns utilizing tiles (square or rectangular) where the side being offset is greater than 18" (nominal dimension), the running bond offset will be a maximum of 33% unless otherwise specified by the tile manufacturer. If an offset greater than 33% is specified, specifier and owner must approve mock-up and lippage.



 ${}^*\!For more information visit www.emser.com. Always consult a professional for proper usage and installation.$

Sterlina $II^{\mathbb{M}}$ beautifully unifies the look of timeless marble with the urban touch of concrete. Available in matte and polished finish and seven colorways to achieve any desired look.

STERLINA II™

Glazed Porcelain






RESIDENTIAL

COMMERCIAL

INDOOR


OUTDOOR

POOL



Pure White

Mosaics






Sizes	32"×32" 31.50°×31.50"	24"x24" 23,62"x23,62"	12"x24" 11.81"x23.62"	12"x12" Mesh	12"x12" Mesh	3"x12" Floor SBN	
Thickness	9.5mm	9.5mm	9.5mm	9.4mm	9.4mm	9.5mm	
Faces	1	1	1	N/A	N/A	1	
Finish	Polished	Matte & Polished	Matte & Polished	Matte	Polished	Matte & Polished	
Edge	Rectified	Rectified	Rectified	Cut	Cut	Cut/Rounded	
Grout Joint Recommendation	3/16"	3/16"	3/16"	3/16"	3/16"	3/16"	
Testing	Abrasion Resistance C1027	Breaking Strength C648	Chemical Resistance C650	Water Absorption	n DCOF ANSI A137.1	Scratch Hardness MOHS	Shade Variation Rating
Results*	IV (Matte) III (Polished)	>400 lbf	Resistant	<0.50%	>0.55 (Matte) <0.42 (Polishe		Vı
Control of the Art of							

Product and Installation Details | ANSI A108.02 Section 4.3.8.2 - For running bond/brick joing patterns utilizing tiles (square or rectangular) where the side being offset is greater than 18" (nominal dimension), the running bond offset will be a maximum of 35% unless otherwise specified by the tile manufacturer. If an offset greater than 33% is specified, specifier and owner must approve mock-up and lippage.





- Red List Free
 - Product Declaration (HPD) provided upon request
- Product Packaging is 100% recyclable



STYLE IITM Glazed Porcelain



FLOOR / WALL

RESIDENTIAL

COMMERCIAL

INDOOR








Vadret

				<0.50%	<0.42	3	V ₂
Testing	Abrasion Resistance	Breaking Strength C648	Chemical Resistance C650	Water Absorption C373	DCOF ANSI A137.1	Scratch Hardness	Shade Variation Rating
Grout Joint ecommendation	3/16"	3/16"	3/16"				
Edge	Rectified	Rectified (Cut/Rounded				
Finish	Polished	Polished	Polished				
Faces	6	20	N/A				
Thickness	8.2mm	8.2mm	9mm				
Sizes	24"x24" 23,62"x23,62"	12"x24" 11.61"x23,62"	3"x12" Floor SBN				

Product and Installation Details | ANSI A108.02 Section 4.3.8.2 - For running bond/brick joing patterns utilizing tiles (square or rectangular) where the side being offset is greater than 18' (nominal dimension), the running bond offset will be a maximum of 33% unless otherwise specified by the tile manufacturer. If an offset greater than 33% is specified, specifier and owner must approve mock-up and lippage.





Recreate the elegant look of marble and stone and add a touch of elegance and natural beauty to any space.

$SWEDEN^{TM}$ Glazed Porcelain





Rhone

Mosaics



Sizes	32"x32" 31.50"x31.50"	24"x47" 23.62"x47.24"	12"x23" (M) 11.81"x23.62"	11"x23" (P) 11.22"x23.43"	12"x12" Mesh 12.01"x12.01"	3"x12" Floor SBN	
Thickness	10mm	10mm	10mm	10mm	10mm	10mm	
Faces	20	20	20	20	N/A	N/A	
Finish	Polished	Polished	Matte	Polished	Matte & Polished	Matte & Polished	
Edge	Rectified	Rectified	Rectified	Rectified	Cut	Cut/Rounded	
Grout Joint Recommendation	3/16"	3/16"	3/16"	3/16"	3/16"	3/16"	
Testing	Abrasion Resistance C1027	Breaking Strength C648	Chemical Resistance C650	Water Absorption C373	DCOF ANSI A137.1	Scratch Hardness MOHS	Shade Variation Rating
Results*	III	>700 lbf	Resistant	<0.50%	>0.55 (Matte) <0.42 (Polished)	5 (Matte) 5 (Polished)	V2
Sustainability Att	ributes						

Product and Installation Details | ANSI A108.02 Section 4.3.6.2 - For running bond/brick joing patterns utilizing tiles (square or rectangular) where the side being offset is greater than 18' (nominal dimension), the running bond offset will be a maximum of 33% unless otherwise specified by the tile manufacturer. If an offset greater than 33% is specified, specifier and owner must approve mock-up and lippage.





Swiss II^{TM} radiates sophisticated beauty highlighting the soft veining of natural stone in a porcelain tile. With polished and matte finishes in multiple sizes, the design possibilities are limitless.





















Bianco



Dove Carbon

Mosaics







Sizes	12"x24" 12.2"x24,02"	12"x12" Mesh	3"x12" Floor SBN				
Thickness	9mm	9.5mm	9mm				
Faces	16	N/A	N/A				
Finish	Matte	Matte	Matte				
Edge	Pressed	Cut	Cut/Rounde	ed			
Grout Joint Recommendation	1/8"	1/8"	1/8"				
Testing	Abrasion Resistance C1027	Breaking Strength Cher C648 C650		ater Absorption	DCOF ANSI A137.1	Scratch Hardness MOHS	Shade Variation Rating

<0.50%

>0.60

Product and Installation Details | ANSI A108.02 Section 4.3.8.2 - For running bond/brick joing patterns utilizing tiles (square or rectangular) where the side being offset is greater than 18" (nominal dimension), the running bond offset will be a maximum of 35% unless otherwise specified by the tile manufacturer. If an offset greater than 33% is specified, specifier and owner must approve mock-up and lippage.





Results* |V

Ded List Free

• VC

Resistant

- Health Product Declaration (HPD) provided upon r
- Product Packaging is 100% recyclable

>375 lbf

Technique[™] showcases the intricate veining in natural stone. Offered in contemporary colors it will add charm to any installation.

TECHNIQUE™ Glazed Porcelain



TERAZIO™ 1 Color | 2 Sizes















Bianco

Enhance[™] Collection



 ${\sf Palladio}$

Available in Size 24"x24." MOQ and lead times apply. Consult your local rep for more information.

Sizes							
	24"×24" 23.62"×23.62"	12"x24" 12.2"x24.02"	3"x24" Floor SBN				
Thickness	10mm	10mm	10mm				
Faces	8	16	N/A				
Finish	Polished	Matte	Matte & Polished				
Edge	Rectified	Rectified	Cut/Rounde	ed			
Grout Joint Recommendation	1/8"	1/8"	1/8"				
Testing	Abrasion Resistance C1027	Breaking Strength C648	Chemical Resistance C650	Water Absorption C373	DCOF ANSI A137.1	Scratch Hardness MOHS	Shade Variation Rating
Results*	III	≥250 lbf	Resistant	<u><</u> 0.50%	<0.42 (Polished) >0.60 (Matte)	6	V ₂

Product and Installation Details | ANSI A108.02 Section 4.3.8.2 - For running bond/brick joing patterns utilizing tiles (square or rectangular) where the side being offset is greater than 18" (nominal dimension), the running bond offset will be a maximum of 33% unless otherwise specified by the tile manufacturer. If an offset greater than 33% is specified, specifier and owner must approve mock-up and lippage.







Terazio $^{\text{TM}}$ is an alluring recreation of quartz-like attributes in a durable porcelain tile. High-definition inkjets create natural speckled variations on the surface in neutral earth tones. Terazio provides a smooth, luminous finish for residential and commercial applications.

TERAZIO™

Glazed Porcelain



FLOOR / WALL

RESIDENTIAL

COMMERCIAL

INDOOR

OUTDOOR





Gray



Taupe



Brown

Testing	Abrasion Resistance C1027	Breaking Strength C648	Chemical Resistance C650	Water Absorption C373	DCOF ANSI A137.1	Scratch Hardness MOHS	Shade Variation Rating
Grout Joint Recommendation		3/16"					
Edge		Rectified					
Finish		Matte					
Faces		12					
Thickness		10.5mm					
		8"×45" 7.89"×44.88"					
Sizes							

Product and Installation Details | ANSI A108.02 Section 4.3.8.2 - For running bond/brick joing patterns utilizing tiles (square or rectangular) where the side being offset is greater than 18" (nominal dimension), the running bond offset will be a maximum of 33% unless otherwise specified by the tile manufacturer. If an offset greater than 33% is specified, specifier and owner must approve mock-up and lippage.





- Ded List Fre
- Health Product Declaration (HPD) provided upon reques
- Product Packaging is 100% recyclable
- VOC Free
- Recycled Content 0%
- *For more information visit www.emser.com. Always consult a professional for proper usage and installation.





FLOOR / WALL

RESIDENTIAL

COMMERCIAL









White


Oyster



Silver

White





Sizes	12"x24" 11.81"x23.62"		' Mesh x11.81"	3' Floo	'x12" or SBN			
Thickness	9mm	9r	nm	9	mm			
Faces	1	N	/A	١	N/A			
Finish	Matte	Ma	atte	M	latte			
Edge	Rectified	С	Cut	Cut/F	Rounded			
Grout Joint Recommendation	1/8"		eck osite		heck ebsite			
Testing	Abrasion Resistance C1027	Breaking Strength C648	Chemical Re	sistance	Water Absorption C373	DCOF ANSI A137.1	Scratch Hardness MOHS	Shade Variation Rating
Results*	III	>325 lbf	Resistant		<0.50%	>0.42	7	V1

Product and Installation Details | ANSI A108.02 Section 4.3.8.2 - For running bond/brick joing patterns utilizing tiles (square or rectangular) where the side being offset is greater than 18" (nominal dimension), the running bond offset will be a maximum of 35% unless otherwise specified by the tile manufacturer. If an offset greater than 33% is specified, specifier and owner must approve mock-up and lippage.





- ${}^*\!For more information visit www.emser.com. Always consult a professional for proper usage and installation.$

Inspired by woven textiles, Thread II^{m} offers a subtle color palette with coordinating mosaics.

THREAD II™

Glazed Porcelain




TIMES SQUARE™ 2 Colors | 2 Sizes

FLOOR / WALL

RESIDENTIAL






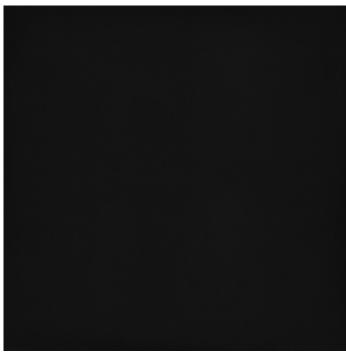

White Black

Available in Matte and Polished Finish.

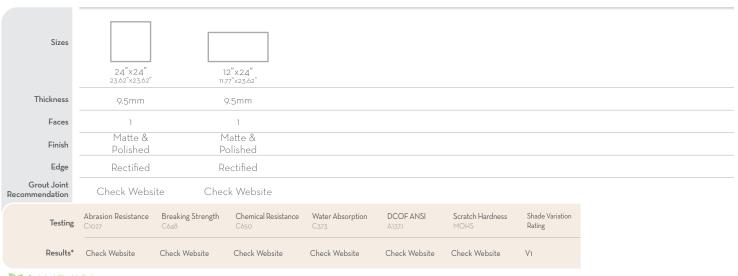



Red List Free

- VO
- Health Product Declaration (HPD) provided upon a
- *For more information visit www.emser.com. Always consult a professional for proper usage and installation.

Times Square $^{\text{TM}}$ is an elegant polished, glazed porcelain series. It can be used to create numerous unique looks and is well suited for installations of contemporary style.

TIMES SQUARE™

Glazed Body Match Porcelain







INDOOR

OUTDOOR







White

Almond



Steel





Taupe

Sizes	12'	'×35" "×35-3"	12"x24" 11.71"x23.50"	3″x1½ Floor S			
Thickness	8	mm	9.5mm	Check W	/ebsite		
Faces		8	32	N/A	4		
Finish	M	latte	Matte	Mati	te		
Edge	Red	ctified	Rectified	Cut/Rou	unded		
Grout Joint Recommendation	1	/8"	1/8"	1/8'	"		
Testing	Abrasion Resistance C1027	Breaking Strength C648	Chemical Resistance C650	Water Absorption C373	DCOF ANSI A137.1	Scratch Hardness MOHS	Shade Variation Rating
Results*	II	>350 lbf	Resistant	<0.50%	>0.60	7	V2

Product and Installation Details | ANSI A108.02 Section 4.3.8.2 - For running bond/brick joing patterns utilizing tiles (square or rectangular) where the side being offset is greater than 18" (nominal dimension), the running bond offset will be a maximum of 33% unless otherwise specified by the tile manufacturer. If an offset greater than 33% is specified, specifier and owner must approve mock-up and lippage.





- ${}^*\!For more information visit www.emser.com. Always consult a professional for proper usage and installation.$



Trendz[™] takes fashion to a new level by combining sophisticated colors with subtle shimmer. The result is undeniably beautiful. From the cool ocean blue to the contemporary steel gray, Trendz is sure to have a look to match any decor. Available in two sizes including a large 12x35 plank and is ideal for any room where a twist on traditional looks is desired.

TRENDZTM Glazed Porcelain



















Album

Diary



Journal






Alk	oum
-----	-----

Diary

Journal

Sizes	21"x21" 21,38"x21,38	12"x24" 12.2"x24.02"	13"x13" Mesh	3"X13" Floor SBN			
Thickness	8.5mm	8.5mm	8.5mm	8mm			
Faces	8	16	N/A	N/A			
Finish	Matte	Matte	Matte	Matte			
Edge	Pressed	Pressed	Cut	Cut/Rounded	d		
Grout Joint Recommendation	3/16"	3/16"	1/8"	3/16"			
Testing	Abrasion Resistance C1027	Breaking Strength C648	Chemical Resistance C650	Water Absorption C373	DCOF ANSI A137.1	Scratch Hardness MOHS	Shade Variation Rating
Results*	IV	>380 lbf	Resistant	<0.50%	>0.55	7	V3


Product and Installation Details | ANSI A108.02 Section 4.3.8.2 - For running bond/brick joing patterns utilizing tiles (square or rectangular) where the side being offset is greater than 18" (nominal dimension), the running bond offset will be a maximum of 33% unless otherwise specified by the tile manufacturer. If an offset greater than 33% is specified, specifier and owner must approve mock-up and lippage.





Red List Free


- VOC1
- Health Product Declaration (HPD) provided upon req
- Product Packaging is 100% recyclable



TROVATA IITM Glazed Porcelain



UPTOWN™

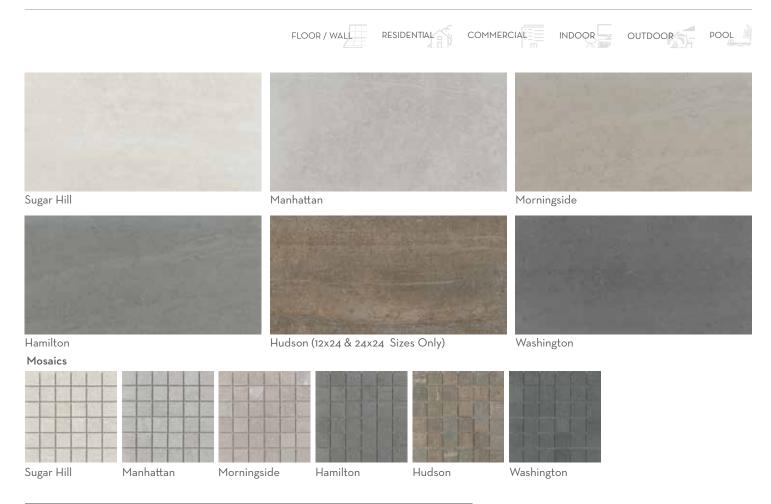

Enhance™ Collection | R11 Anti-Slip Finish



Morningside, Hudson, and Hamilton

Available in Size 20"x40." MOQ and lead times apply. Consult your local rep for more information.

		,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,						
Sizes	24"x47", 24,02"x47.24	. 24"x2/ 24.02"x24.	12": 02" 12.2"x	x24" 1 24.02"	2"X12" Mesh 11.81"X11.81"	3"x12" Floor SBN	6"x12" Cove Base	1"x6" Cove Base Corner Out
Thickness	10mm	9mm	9.5	mm	10mm	9.5mm	Check Website	Check Website
Faces	6	20	2	24	N/A	N/A	N/A	N/A
Finish	Matte	Matte	e Ma	atte	Matte	Matte	Matte	Matte
Edge	Rectified	Rectifie	ed Rec	tified	Cut	Cut/Rounded	Cut/Rounded	Cut/Rounded
Grout Joint Recommendation	1/8"	1/8"	1/	/8"	5/64"	5/64"	Check Website	Check Website
Testing	Abrasion Resistance C1027		Chemical Resistance C650	Water Absorptio	DCOF ANS	Scratch Hardne MOHS	ess Shade Variation Rating	
Results*	IV	≥250 lbf R	esistant	<0.50%	>0.55	7	V2	



- Red List Free
- claration (HPD) provided upon request
- Product Packaging is 100% recyclable





Uptown[™] features subtle textures and color variation giving it a timeless, urban feel. All colors are offered in a coordinating mosaic for a variety of installation options.

UPTOWN™ Glazed Body Match Porcelain



















Ribia Groven



Groven









<0.42 (Polished) >0.55 (Matte)

^ ^ ^

5 (Polished) 7 (Matte)

V2



Sizes			,,				}			"
	24"×47" 23.62"×47.24"	24"x2, 23.62"x23			'x24" 'x23.62"	10"x12" M 10"x11.57		10"x13" Mesh 9.84"x12.52"	3"x Floor	(12 - SBN
Thickness	12mm	10mm (M 9.5mm (Po			(Matte) (Polished)	8.8mn	n	8.8mm	Check \	Website
Faces	6	12			24	N/A		N/A	N,	/Α
Finish	Matte & Polished	Matte Polishe			itte & ished	Matte		Matte	Mat Polis	te & shed
Edge	Rectified	Rectifi	ed	Red	ctified	Cut		Cut	Cut/Ro	ounded
Grout Joint Recommendation	1/8"	1/8"		1	/8"	Check We	bsite	Check Website	Check	Website
Testing	Abrasion Resistance C1027	Breaking Strength C648	Chemical C650	Resistance	Water Abso	rption DC	COF ANS	Scratch Hardr	ess Sha Rat	nde Variation ing

Product and Installation Details | ANSI A108.02 Section 4.3.8.2 - For running bond/brick joing patterns utilizing tiles (square or rectangular) where the side being offset is greater than 18" (nominal dimension), the running bond offset will be a maximum of 33% unless otherwise specified by the tile manufacturer. If an offset greater than 33% is specified, specifier and owner must approve mock-up and lippage.





Results*

II (Polished) III (Matte)

Resistant

<0.50%

>350 lbf

 $Vara^{TM}$ takes its inspiration from the natural beauty of marble. This stunning line evokes the luxurious look of natural stone but with the easy care of porcelain tile. The subtle veining and crisp coloring creates a stylish environment.

VARATM
Glazed Porcelain

















Force

Pulse

Sizes							
	17"×35" 17.40"×35.04"						
Thickness	11mm						
Faces	3						
Finish	Matte						
Edge	Rectified						
Grout Joint ecommendation	5/64"						
Testing	Abrasion Resistance C1027	Breaking Strength C648	Chemical Resistance C650	Water Absorption C373	DCOF ANSI A137.1	Scratch Hardness MOHS	Shade Variation Rating
Results*	III	>850 lbf	Resistant	<0.50%	>0.55	7	V ₂

Product and Installation Details | ANSI A108.02 Section 4.3.6.2 - For running bond/brick joing patterns utilizing tiles (square or rectangular) where the side being offset is greater than 18' (nominal dimension), the running bond offset will be a maximum of 33% unless otherwise specified by the tile manufacturer. If an offset greater than 33% is specified, specifier and owner must approve mock-up and lippage.



- Ded List Free
- Health Product Declaration (HPD) provided upon reques
- Product Packaging is 100% recyclable
- . VOC Free
- Recycled Content 0%

Velocity[™] uniquely displays the varied colors and textures of distressed wood. A popular chevron pairs natural and painted wood tones for rustic, yet modern appeal. Plank tiles invite creative layouts for geometric designs that play on patterns.

VELOCITY™ Glazed Porcelain






Gray



Latte



Honey

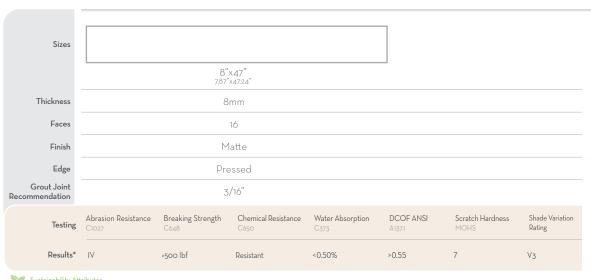

Product and Installation Details | ANSI A108.02 Section 4.3.8.2 - For running bond/brick joing patterns utilizing tiles (square or rectangular) where the side being offset is greater than 18" (nominal dimension), the running bond offset will be a maximum of 33% unless otherwise specified by the tile manufacturer. If an offset greater than 33% is specified, specifier and owner must approve mock-up and lippage.





- ${}^*\!For more information visit www.emser.com. Always consult a professional for proper usage and installation.$

Quietly sophisticated with all the inherent benefits of tile, that's the story behind Victus™. Natural wood looks add warmth and comfort, whether your style leans more modern and minimal or traditional and timeless.

VICTUS™ Glazed Porcelain







White

Ivory



Gray





Shade Variation

Rating

V2

Scratch Hardness

Sustainability Attributes

Testing

Results*

Resistant

<0.50%

>0.60


 ${}^*\!For more information visit www.emser.com. Always consult a professional for proper usage and installation.$

>400 lbf

Virtue[™] features interlocking tiles that seamlessly connect for a consistent hexagon shape. Its eclectic mix of ornate patterns and smooth textures add an accent pop, or bold, allover patterning. An octagonal shape blends the craftsmanship of a mosaic with the ease of larger-format tiles.

VIRTUE™ Glazed Porcelain



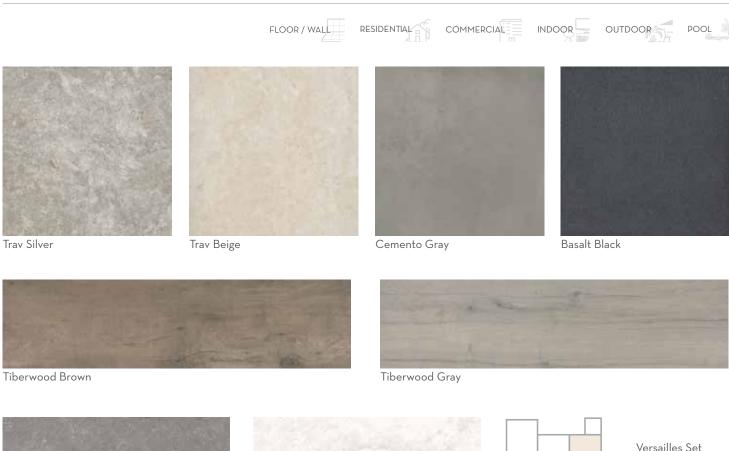







Versailles Set Available in Ashmont and Caminar Colors Only.

	Trav Silver, Trav Beige, Cemento, Basalt & Tiberwood				Ashmont Gray & Caminar White		
Sizes	24"x24" 23.62"x23.62"	12"×47" 11.73"×47.05"	12"x24" Coping		24"x24" 23.50"x23.50"	16"×31" 15.63"×31.38"	Versailles Set
Thickness	20mm	20mm	20mm		20mm	20mm	20mm
Faces	12 (Travertine) 8 (Cemento)	8	24 (Travertine) 16 (Cemento)		12	12	N/A
Finish	Matte	Matte	Matte		Matte	Matte	Matte
Edge	Rectified	Rectified	Rectified		Rectified	Rectified	Rectified
Grout Joint Recommendation	1/8"	1/8"	3/16"		Check Website	Check Website	Check Website
Testing	Abrasion Resistance C1027	Breaking Strength C648		Water Abso	DCOF ANSI A137.1	Scratch Hardness MOHS	Shade Variation Rating
Results*	IV	≥500 lbf	Resistant <	0.50%	>0.60	7	V2 V1 (Ashmont & Caminar)



• Red List Fre

Ashmont Gray

- Health Product Declaration (HPD) provided upon request
- Product Packaging is 100% recyclable
- VOC Free
- Recycled Content 0%

 $Xtra^{\mathsf{TM}}$ replicates the look of concrete, wood, and stone in multiple colors. This unique collection is suitable for indoor and outdoor spaces.



