

Imprint honors the harmony of contrast—where old meets new, crafted meets machined, and delicate meets enduring. Rooted in the authenticity of clay, this collection brings a calming, biophilic connection to the built environment, embracing the warmth and grounding presence of the natural world. Imprint invites a sense of comfort and quiet familiarity, creating spaces that feel genuinely lived in, balanced, and beautifully human.

IMPRINT™

Glazed Porcelain



LOCAL STOCK AVAILABLE



LOCAL STOCK AVAILABLE



Intaglio Cool

Intaglio Warm

Intaglio Kaolin



Strata Cool

Strata Warm

Strata Kaolin



Raw Earth Cool

Raw Earth Warm




Underglazed Ombre Cool

Underglazed Ombre Warm

Rare Earth Deco



Sizes Styles Thickness Faces Finish Edge Grout Joint Recommendation Testing Results*									
	47" x 110" 47.28" x 110"	47" x 47" 47.28" x 47.28"	24" x 47" 23.46" x 47.28"	23" x 23" 23.46" x 23.46"	12" x 24" 11.73" x 23.6"	12" x 12" 11.73" x 11.73"	2" x 2" on 12" x 12" Mesh 11.73" x 11.73"		
	Underglazed	Intaglio	Intaglio, Strata & Raw Earth	Intaglio	Intaglio, Strata & Raw Earth	Rare Earth	Intaglio		
	6mm	8mm	8mm	20mm	8mm	8mm	8mm		
	4	10	20	20	40	20	Random		
	Matte	Matte	Matte	R11 Grip	Matte	Matte	Matte		
	Rectified	Rectified	Rectified	Rectified	Rectified	Rectified	Rectified		
	Check Website	Check Website	Check Website	Check Website	Check Website	Check Website	Check Website		
	Abrasion Resistance C1027	Breaking Strength C648	Chemical Resistance C650	Water Absorption C373	DCOF ANSI A1371	Scratch Hardness MOHS	Shade Variation Rating		
	Check Website	Check Website	Check Website	Check Website	Check Website	Check Website	V2		

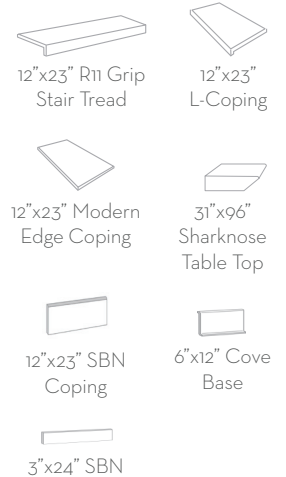

- Sustainability Attributes**
- Red List Free
 - Health Product Declaration (HPD) provided upon request
 - Product Packaging is 100% recyclable

Product and Installation Details | ANSI A108.02 Section 4.3.8.2 - For running bond/brick jointing patterns utilizing tiles (square or rectangular) where the side being offset is greater than 18" (nominal dimension), the running bond offset will be a maximum of 33% unless otherwise specified by the tile manufacturer. If an offset greater than 33% is specified, specifier and owner must approve mock-up and lippage.



*For more information visit www.emser.com. Always consult a professional for proper usage and installation.

