

CUSTOMER: _____

One Signature Required

JOB NAME: _____

PO #: _____ QUOTE # _____

DATE: _____ QUANTITY: L _____ R _____

SHIP TO: _____

PLUMBING CONTRACTOR APPROVAL

____/____/____
DATE

GENERAL CONTRACTOR APPROVAL

____/____/____
DATE

ENGINEER APPROVAL

____/____/____
DATE

ARCHITECT APPROVAL

____/____/____
DATE

To complete your order, this document must be signed and emailed to the Centralized Customer Service Center.

quotes@americanbathgroup.com • 800.443.7269

STANDARD FEATURES

- Pre-leveled base
- Solid Surface
- 1 1/8" skirt
- Compliant when properly installed
- Center front drain outlet
- Integral front trench drain
- 12" x 24" subway tile
- Slip resistant, textured bottom [ASTM F-462]

Int. Dim.	60 W x 34 D x 76 5/8 H
Ext. Dim.	62 1/4 W x 36 1/8 D x 78 3/4 H
Skirt Ht.	1 1/8" skirt
Packaged Wt.	210 lbs.
Material	Solid Surface
Warranty	30-year warranty*

* See terms and conditions for details

inches

CONFIGURATION (handed by the seat)

- ☐ Shell reinforced for future accessory installation
 - Fixture Wall ☐ LH ☐ RH ☐ Back Wall
 - ☐ Optional vertical bar reinforcement (entry wall)
 - ☐ LH ☐ RH ☐ Both
- ☐ Fully configured — ADA
 - Fixture Wall (must choose one) ☐ LH ☐ RH ☐ Back Wall
 - Includes two stainless steel 24" x 1 1/2" grab bars located on the side walls and one stainless steel 48" x 1 1/2" grab bar located on the back wall, per ADA guidelines. (std config)
 - ☐ Factory-installed plumbing options per ADA requirements
 - ☐ Hand-held shower assembly, 30" slide bar and 60" hose
 - ☐ Pressure balancing mixing valve

OPTIONAL ACCESSORIES (available for all models)


- ☐ Stainless steel vertical bar 24" x 1 1/2" (entry wall)
 - ☐ LH ☐ RH ☐ Both
- ☐ Large soap dish (12 1/2" W x 3 1/2" D x 1 1/2" H), shipped loose
- ☐ Small soap dish (7" W x 3 1/2" D x 1 1/2" H), shipped loose
- ☐ Curtain rod, shipped loose
- ☐ Shower curtain, shipped loose
- ☐ Brass drain

Colors:

- Standard ☐ White
- ☐ Other (contact customer service for custom color options)
- ☐ Additional accessories: _____

CUSTOM OPTIONS (not avail. if ADA configuration is selected)

- Grab bars:
 - ☐ Horizontal U-shaped bars: 24" (side wall) and 48" (back wall)
 - ☐ Vertical bar 24" (entry wall) ☐ LH ☐ RH ☐ Both
- Grab Bar finish:
 - ☐ Stainless steel (1 1/2" dia.)
 - ☐ Powder-coated white (1 1/4" dia.)
- ☐ Factory-installed plumbing options per ADA requirements
 - ☐ Hand-held shower assembly, 30" slide bar and 60" hose
 - ☐ Pressure balancing mixing valve
 - ☐ LH ☐ RH ☐ Back Wall
- Grate:
 - ☐ Stainless steel
 - ☐ White

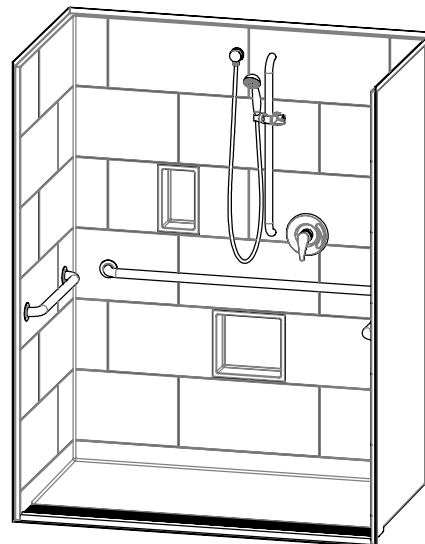

Back Wall configuration
shown with optional soap dish


This unit is not suitable for behavioral health applications.



ADA compliant when fully equipped
and installed according to guidelines.



This unit is not suitable
for behavioral health applications.

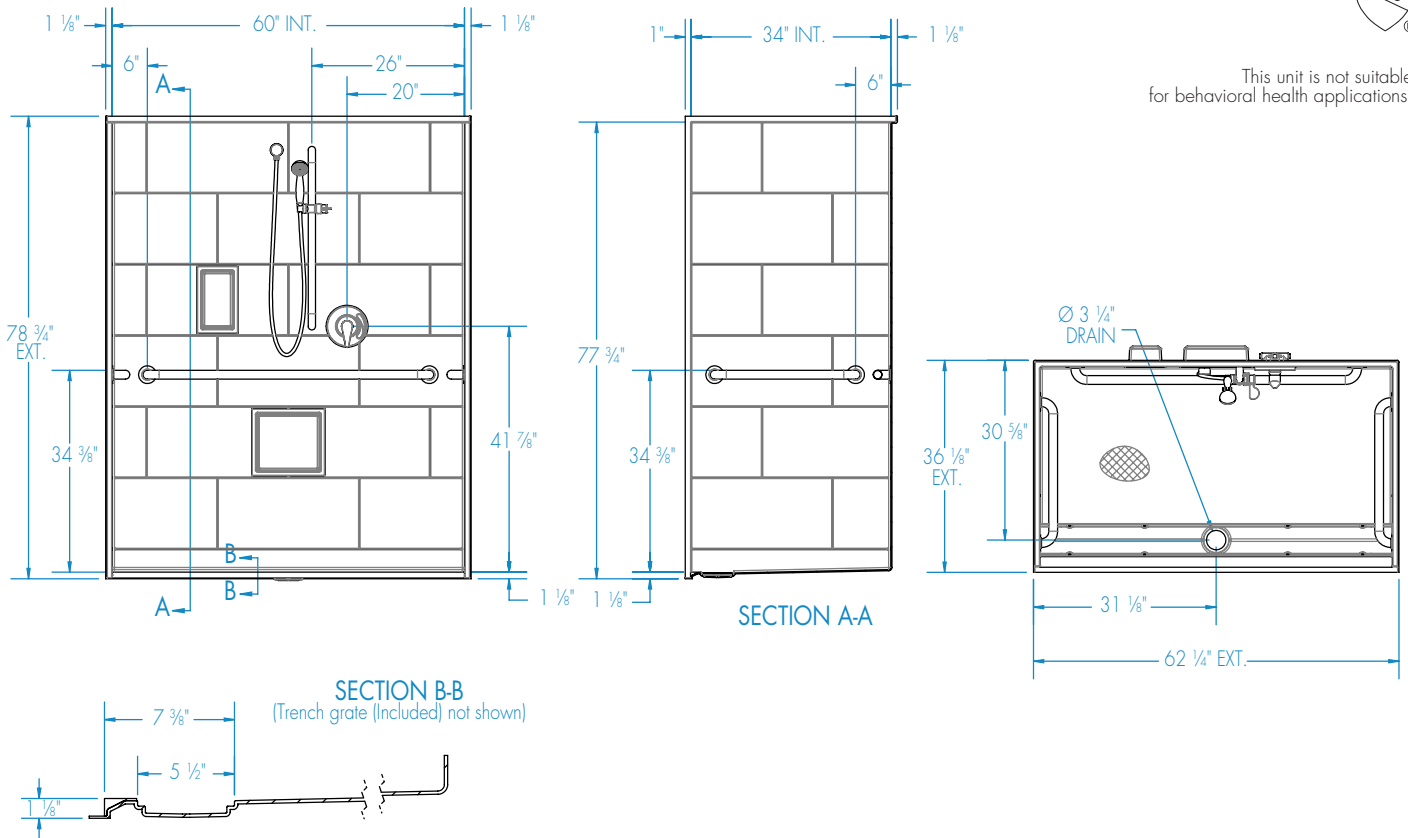

FEATURES lbs Dimensional Tolerance $\pm \frac{3}{8}$ ". Dimensions needed for site preparation should be measured from the unit. Manufacturer assumes no responsibility for preparatory work.


Type and Model #	Material	Wall Finish	Pieces	Drain	Dam/Skirt Height	Net Wt.	Pkg. Wt.
Shower SST6034TR 1.125	Solid Surface	Smooth tile	1	Center Front	1 1/8" skirt	200	210

DIMENSIONS

Specifications	inches
Width: Ext. / Int.	62 1/4 / 60
Depth: Ext. / Int.	36 1/8 / 34
Height: Ext. / Int.	78 3/4 / 76 5/8
Enclosure Opening:	60
Skirt Height:	1 1/8
Drain Rough-In (from Back Wall)	30 5/8
Drain Rough-In (from Side Wall)	31 1/8

FRAMING DIMENSIONS inches (mm)

Type	D Depth	W Width	H Height	A	B	C
Alcove	36 1/8	62 1/2	—	Box Out	31 1/8	30 5/8

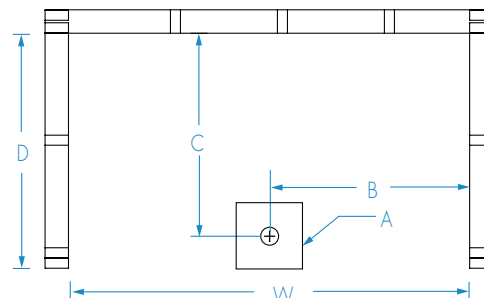

EMAIL TO THE CENTRALIZED CUSTOMER SERVICE CENTER: quotes@americanbathgroup.com