

Lightology

lightology.com
866-954-4489
05-18-26

Project: _____

Company: _____

Location: _____ Fixture Type: _____

SPEC #: **EUF543575**

Approved On: _____ Approved By: _____

6IN LED Multiples Trim with Remodel Housing

By Eurofase



Description

The 6 Inch LED Multiples Trim with Remodel Housing is Non-IC rated requiring that insulation be kept a minimum of 3 inches away from housing. Includes adjustable 1, 2, 3 or 4-light trim available in a powder coat White trim with a White or Black reflector, or a powder coat Black trim with a Black reflector. Includes 26 watt, 120 volt LED modules with 20 or 40 degree beam angles. 0-20 degree horizontal adjustment. Class 2 dimmable constant current driver included. Dimmable with a TRIAC dimmer, sold separately. ETL listed. Can be converted to a Non-IC new construction housing with PAR30 LED new construction mounting plate, sold separately.

Specifications


REFLECTOR/BAFFLE COLOR	N/A
BODY FINISH	White Trim / White Reflector
WATTAGE	104W
DIMMER	Standard 120V
DIMENSIONS	24.25"W x 7"H x 7.75"D
INTEGRATED LED MODULE	4 x LED/26W/120V LED
COUNTRY OF ORIGIN	China

Technical Information

APERTURE SIZE	7.000"
APERTURE SHAPE	Square
HOUSING HEIGHT	7"
HOUSING TYPE	Remodel NON IC
CEILING TYPE	Drywall with Trim
FUNCTION	Adjustable Accent
LAMP LIFE	50000 hours
BEAM ANGLE	20°
COLOR RENDERING	90 CRI
LAMP COLOR	4000K
LUMENS/WATT	384.62
LUMINOUS FLUX	10000 lumens



Shown in white trim / white reflector

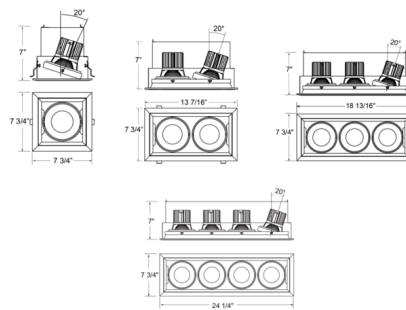

CLICK TO VIEW PRODUCT

Notes: