
annes

BY SONANCE

SMALL APERTURE SERIES DATA SHEET

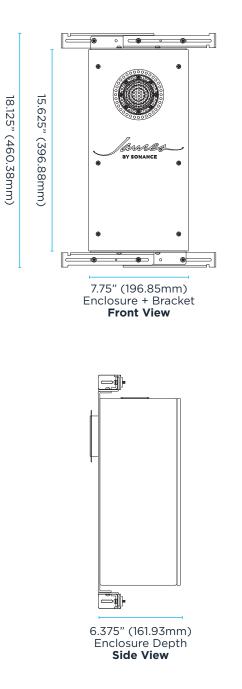

SA68 TECHNICAL SPECIFICATIONS

SKU	SA68 SA68-ENC 60597 + SA68-MOD 60598
UOM	Each
Wide Bandwidth Driver	2.0" (50mm) Thin Ply Carbon Fiber cone, rubber surround
Woofer	6.5" (165mm) Thin Ply Carbon Fiber/Rohacell cone, rubber surround
Frequency Response	45Hz - 25kHz +/-3dB
Frequency Range	35Hz-30kHz +/-10dB
Impedance	8 ohms nominal; 6 ohms minimum
Power Handling (RMS)	5 watts minimum; 150 watts maximum
Sensitivity (2.83V/1m)	82dB SPL
Overload Protection	Two independent self-resetting poly switches
Enclosure Only (WxHxD)	7.75" x 15.625" x 6.375" (196.85mm x 396.88mm x 161.93mm)
Enclosure With Bracket (WxHxD)	7.9" x 18.125" x 6.375" (200.66mm x 460.38mm x 161.93mm)
Minimum Installation Width	7.9" (200.66mm)
Maximum Installation Width	16.75" (425.45mm)
Shipping Weight	22 lbs

LIMITED WARRANTY James by Sonance warrants this product to the original purchaser to be free from defects in materials and workmanship under normal use. Limited Lifetime Warranty applies to indoor installations. Limited Five (5) Year Warranty applies to outdoor or moisture-dense environments (e.g., spas, showers, saunas). Grille is warranted for five (5) years for both indoor and outdoor use. Warranty valid only for products purchased from authorized dealers and installed per manufacturer guidelines. Excludes damage from misuse, accidents, modifications, improper installation, or normal wear. For details or claims, visit sonance.com/contact.

©2025 Sonance. All rights reserved. Sonance is a registered trademarks of Dana Innovations. Due to continuous product improvement, all features and specifications are subject to change without notice. For the latest Sonance product specification information visit our website at www.sonance.com. JAMES by SONANCE • 2185 Park Place • Minden, NV 89423 • USA • PHONE: (775) 461-7500 • www.sonance.com 06.26.2025