

# UniCam® Connector, LC Organizer pack, Single-mode (OS2)

CORNING

**Part Number:**  
**95-200-99-Z**

Corning® UniCam® LC connectors offer optical performance in a fast, easy field-termination solution ideal for fiber-to-the-workstation applications where setup and teardown time is critical. The high-precision mechanical splice technology enables fiber optic networks to be installed quickly and cost effectively. Installation of an LC, SC or ST® compatible connector can be accomplished in about 50 seconds to one minute with the UniCam High-Performance Tool Kit.

The lightweight, handheld installation tool and high-performance precision cleaver virtually eliminate human variability during installation, ensuring terminations are right the first time, every time. This kit was designed with consideration for network installers, from the cleaver, with its intuitive, hand-held precision design and dual-clamp precision hold, to the installation tool, with its immediate go/no-go feedback signal indicating proper mating of the field fiber to the fiber stub. Installation is as easy as strip, clean, cleave, cam and crimp, with exceptional optical performance assured. Every UniCam connector is assured to meet the published specification at the time of installation or Corning will replace it.

## Features and Benefits

### Performance guaranteed

100 percent yield guarantee

### Broad operating temperature range (-40°C to +75°C)

Utility and flexibility

### Factory-polished end face


Consistent optical performance

### Fast termination and no consumables

Low installation cost

### Minimum insertion loss

Optimum optical performance

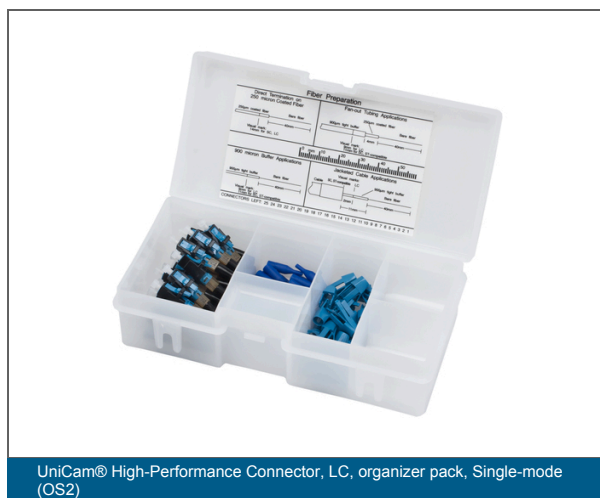

# UniCam® Connector, LC Organizer pack, Single-mode (OS2)

CORNING

## Specifications

### General Specifications

Fiber Category	Single-mode (OS2)
Product Type	Field-Installable Connectors
Corning Logo	Yes
Keyed (security)	No
Technology	No-Epoxy/No-Polish

### Standards

RoHS	Free of hazardous substances according to RoHS 2011/65/EU
------	---

### Environmental Conditions

Temperature Range, Operation	-40 °C to 75 °C (-40 °F to 167 °F )
------------------------------	-------------------------------------

### Design - Connector

Connector Type	LC
Housing Color	Blue
Boot Color	Blue
Ferrule Material	Ceramic

### Mechanical Specifications - Connector

Nominal Fiber Outer Diameter	125 µm
Tensile Strength Jacketed Cable	44 N (9.89 lbf)
Durability	≤ 0.2 dB change, 500 rematings, FOTP-21
Tensile Strength 900 µm Cable	4.9 N (1.1 lb) change ≤ 0.2 dB, FOTP-6

# UniCam® Connector, LC Organizer pack, Single-mode (OS2)

CORNING

## Optical Specifications - Connector

Polish	UPC
Insertion Loss, Max.	0.5 dB
Reflectance	< -55 dB
Insertion Loss, Typical	0.2 dB

## Dimensions

Length	0 mm (0 in)
--------	-------------

## Ordering Information

Product Number	95-200-99-Z
EAN Code	4056418196244
Package Contents	25 connectors, 25 triggers, 25 boots (900 µm)
Packaging Method	Organizer Pack
Units per Delivery	25/1



Corning Optical Communications LLC • 4200 Corning Place • Charlotte, NC • 28216 • United States  
800-743-2675 • FAX: 828-325-5060 • International: +1-828-901-5000 • [www.corning.com/opcomm](http://www.corning.com/opcomm)

A complete listing of the trademarks of Corning Optical Communications is available at [www.corning.com/opcomm/trademarks](http://www.corning.com/opcomm/trademarks). All other trademarks are the properties of their respective owners. Corning Optical Communications is ISO 9001 certified. © 2025 Corning Optical Communications. All rights reserved.