



CAUTION

GENERAL

Remove the fixture and the mounting package from the box and make sure that no parts are missing by referencing the illustrations on the installation instructions.

TOOLS REQUIRED

ASSEMBLY AND INSTALLATION


Turn off the power at fuse or circuit breaker.

1. Gently take all parts out of the package, lay them on a smooth surface, unscrew the FIXTURE SCREWS from the CROSS BAR. Attach the CROSS BAR to the JUNCTION BOX using JUNCTION BOX SCREWS.
2. Make wire connections with WIRE CONNECTORS:
 - A- Connect the black wire(Hot) from Fixture to the black supply wire.
 - B- Connect the white wire(Neutral) from Fixture to the white supply wire.
 - C- Attach the fixture ground wire to the CROSS BAR with the GREEN GROUND SCREW.Then connect it to the supply ground wire with a WIRE CONNECTOR.
Carefully tuck wires back into the JUNCTION BOX.
3. Attach the FIXTURE to the CROSS BAR through SCREW HOLES as shown, and secure it with FIXTURE SCREWS.
4. Remove the SOCKET RINGS from the SOCKET. Attach the GLASS SHADES onto FIXTURE using SOCKET RINGS.
5. Install BULBS. See relamping label at socket area or packaging for maximum allowed wattage.


Turn on the power at fuse or circuit breaker.

Diagram illustrating the wiring connections for the canopy. The components shown are:

- JUNCTION BOX (not included)
- CROSS BAR
- JUNCTION BOX SCREWS
- WHITE (NEUTRAL)
- FIXTURE SCREWS
- CANOPY
- GREEN GROUND SCREW
- GROUND WIRE
- BLACK (HOT)
- WIRE CONNECTORS

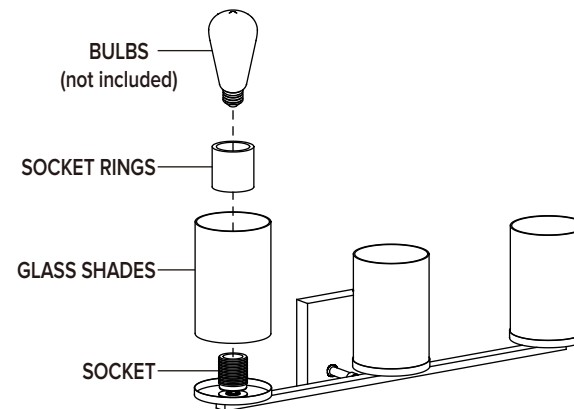

624528
624536

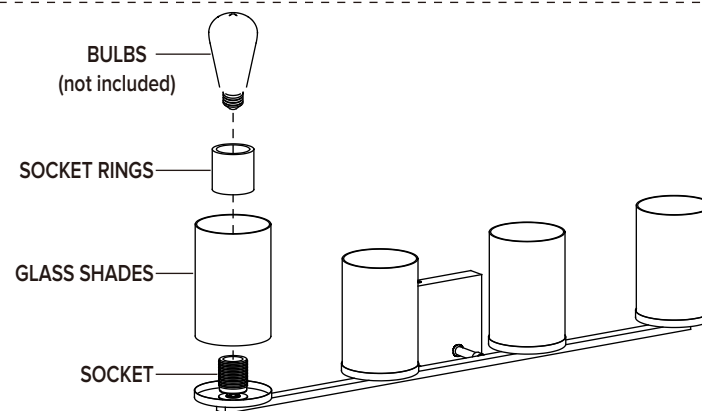

624544
624551

**IF IN DOUBT ABOUT ELECTRICAL INSTALLATION,
CONSULT A LICENSED ELECTRICIAN.**

Customer Service 262-518-1877