



GE APPLIANCES

VARIABLE REFRIGERANT FLOW HEAT PUMP SYSTEM INDOOR UNIT

MWAD018NE2AA

18K
BTH/h

SUBMITTAL

Job Name:

Approval:

Purchaser:

Date:

Submitted To:

Submitted By:


Construction:

Unit:

Reference:

Drawing #:

LOW ESP SLIM DUCT

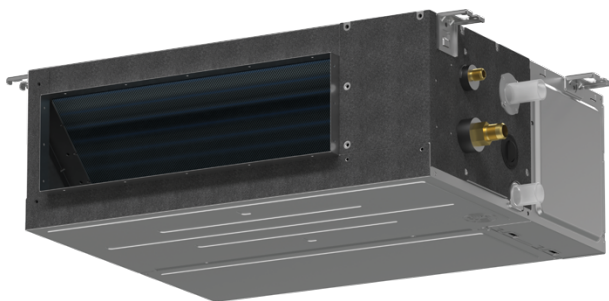

Features and Benefits

- Anti-cold air function prevents cold air during startup in heating mode to enhance comfort.
- Constant airflow control maintains stable air volume.
- Optional bottom or rear air return configurations for flexible duct design.
- Enhanced indoor air quality with the Ag+ Silver Ion Filter.
- Integrated condensate drain pump.
- Standard integrated R32 leak detector for enhanced safety and compliance.
- Compact design requires only ~10 inches of vertical space above the ceiling.
- Flexible vertical/horizontal installation orientation.

Specifications

ODU	Marketing Model Name	MWAD018NE2AA
	Nominal Capacity (Btu/h)	18,000
	Dimension: H x W x D (in.)	7-13/16 x 35-7/16 x 17-11/16
	Net Weight (lbs)	36.38
	Sound Level (dBA)	53/52/50/47/46/42/41
	Heating Capacity (Btu/h)	20,000
Electrical	Voltage (V / Ø / Hz)	208-230/1/60
	Minimum Circuit Ampcity (MCA)	0.56
	Maximum Overcurrent Protection	15
	Running Current, Cooling	0.5
	Running Current, Heating	0.5
Fan	Type	Centrifugal
	Motor Type	DC
	Motor Output	30 W
	Number of Speeds	7
	Airflow Rate, CFM (H/M/L)	583/530/476/424/371/344/318
	Airflow Rate, m ³ /h (H/M/L)	990/900/810/720/630/585/540
	Ext. Static Pressure Max	0.2"
Refrigerant and Piping	Refrigerant Type/Charge (oz.)	R32 / -
	Liquid Pipe O.D. (in)	1/4
	Gas Pipe O.D. (in)	1/2

For more information visit us:

[GEAppliancesAirAndWater.com](https://www.GEAppliancesAirAndWater.com)

©Copyright 2026 GE Appliances, a Haier Company. GE is a trademark of the General Electric Company. Manufactured under trademark license. GE Appliances has a policy of continuous improvement of its products and reserves the right to change materials and specifications without notice.




GE APPLIANCES
a Haier company

AIR&WATER
SOLUTIONS

Dimensions (unit: in.)

Return Air Opening (Inlet)	32-3/16 *6-15/16 inch
Supply Air Opening (Outlet)	29-8/16*4-11/16 inch

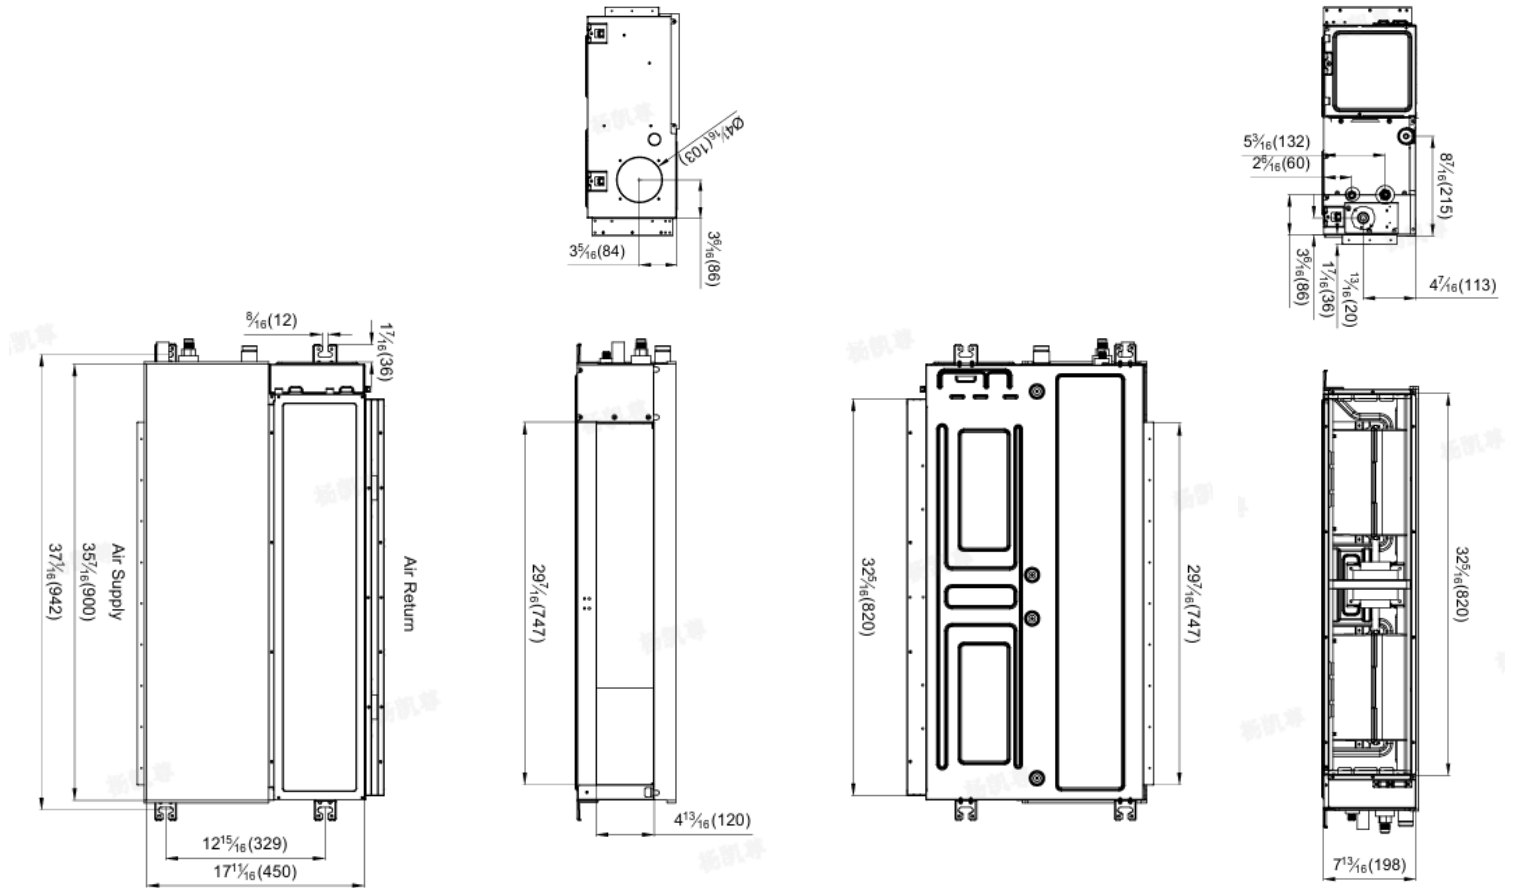

SUBMITTAL REVISION HISTORY

05-08-26:	Submittal release.
08-20-26:	Specification update (Ext. Static Pressure Max).