

STEP 1

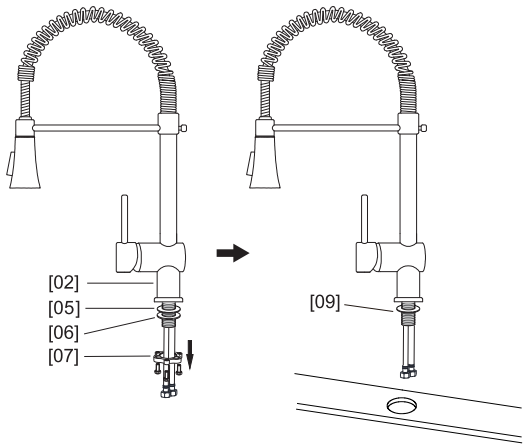

1. Remove Rubber Gasket [05], Steel Gasket [06] and Lock Nut [07] from Faucet Body [02].
2. Position the faucet and Washer [03] through the faucet hole.

STEP 2

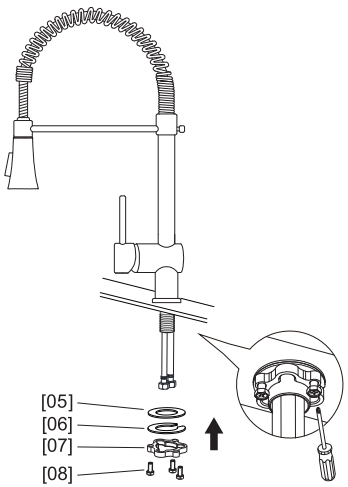


1. Slide Rubber Gasket [05] and Steel Gasket [06] up onto Faucet Body [02] from under the sink and secure with Lock Nut [07] and Screws [08].
2. Adjust the position of the faucet. Hand tighten the Lock Nut [07] and tighten the Screws [08] with a screwdriver to secure the faucet.

STEP 3


1. Make sure all fittings and end connections are free of debris. Turn off the supply valves(not provided).
2. Connect Hot & Cold hoses to the supply valves,making sure the red braided hose with "HOT" label connected to the hot supply valve and the blue braided hose with "COLD" label connected to the cold supply valve, hand tighten them, then tighten with wrench.
   DO NOT OVER TIGHTEN!

WARNING: Do not use pipe dope or other sealants on water connections.

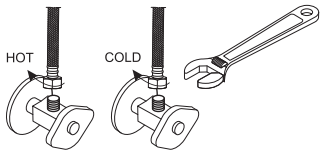

STEP 4

1. Turn on hot and cold water supplies and check all connections at arrows for leaks. Retighten if necessary, but do not over tighten.
2. Remove the Spray Head [01] and washer and hold the hose downward.
3. Turn on the handle to flow the hose for 30 sec.
4. Install the Spray Head [01] and washer to the hose and tighten it to secure. Do not over tighten. Then put the Spray Head [01] back to the faucet to finish the installation.

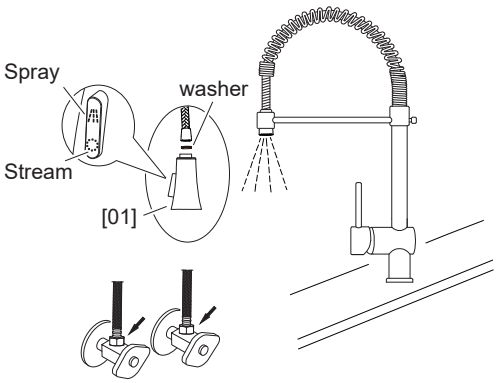

ANZZI®


ITEM: KF-AZ211**

ANZZI SINGLE HOLE KITCHEN FACUET

INSTALLATION & OPERATION MANUAL

V2.1

09/28/2026

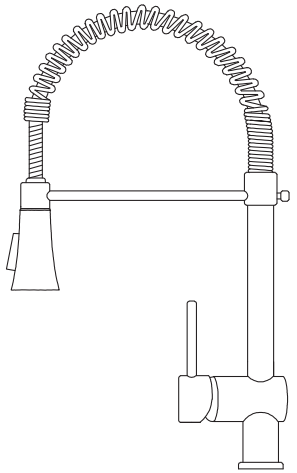

LEAD FREE
NSF/ANSI/CAN 61
UPC
C ®

DON'T WAIT! REGISTER NOW!

Register your product within 90 days to ensure your purchase is recognized and eligible for warranty coverage.

Register online at https://anzzi.com/pages/register or scan the QR code on PG. 2.


V2.1-This version supersedes all previous versions as of 09/28/2026

PRODUCT REGISTRATION*

IMPORTANT: Warranty will not be recognized unless product is registered.


Register online at https://anzzi.com/pages/register or Scan the QR code below.
Registering your product maximizes your warranty benefits and ensures prompt service and support.

1. USE YOUR PHONE CAMERA TO SCAN THE QR CODE
2. FILL IN A QUICK REGISTRATION FORM
3. CLICK SUBMIT AND ENJOY PEACE OF MIND

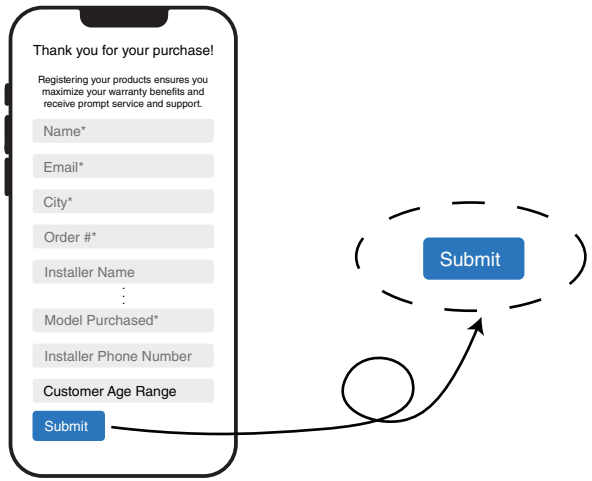


Need help? For technical support call **305-363-4679** or visit us at **www.ANZZI.com**

PRODUCT SIZE CHART

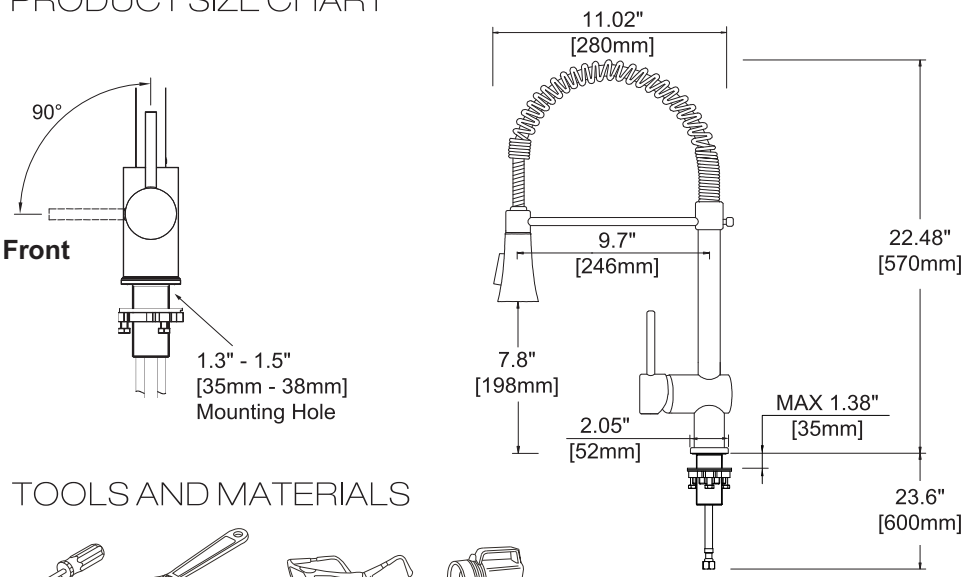

TOOLS AND MATERIALS

COMPONENT

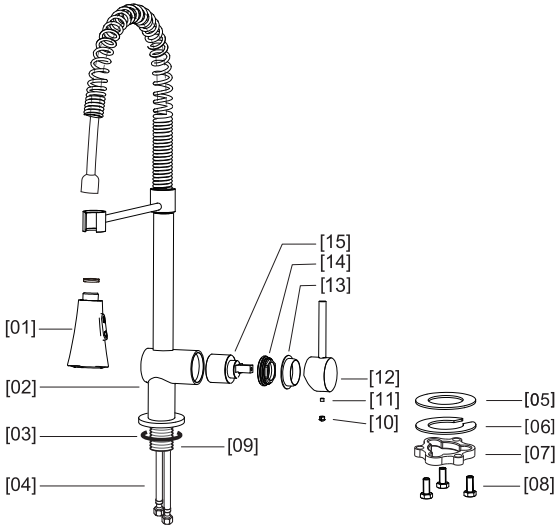

Part	Discription	Qty
[01]	Spray Head	1
[02]	Faucet Body	1
[03]	Washer	1
[04]	Hot & Cold Hoses	2
[05]	Rubber Gasket	1
[06]	Steel Gasket	1
[07]	Lock Nut	1
[08]	Screw	3
[09]	Shank	1
[10]	Indicator	1
[11]	Screw	1
[12]	Handle	1
[13]	Cover	1
[14]	Retainer	1
[15]	Cartridge	1

CLEANING & MAINTENANCE

1. To preserve the finish on the metallic parts of your ANZZI faucet, apply non-abrasive wax, such as car wax. Rinse off any cleaners immediately.
2. Clean the aerator regularly for calcium build-up or any blockage that reduces water flow.
3. If the water flows slower than normal, please clean filter between the spray head and the faucet.