

# Accra

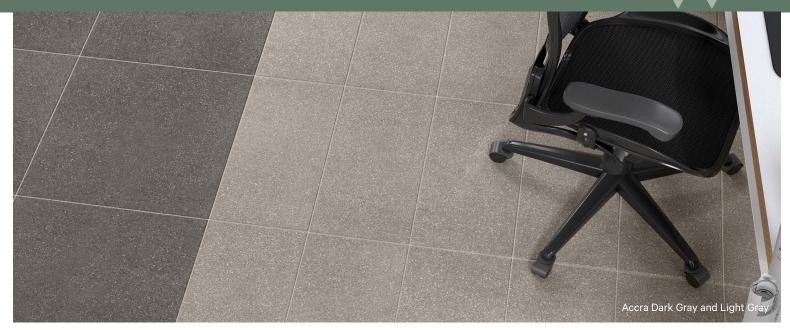

Colors



White VTL ARWH

Beige VTL ARBE



Light Gray VTL ARLG



Medium Gray VTL ARMG

### Sizes



24" x 24" 7.94 mm Rectified Light Polished and Matte

- White
- Beige
- Light Gray
- Medium Gray
- Dark Gray



12" x 24" 7.94 mm Rectified Light Polished and Matte

- White
- Beige
- Light Gray
- Medium Gray
- Dark Gray



Dark Gray VTL ARDG

#### Field Tiles\*

SIZE	ACTUAL	THICKNESS	FINISH
24" x 24" Rectified	23.402" x 23.402	7.94 mm	Light Polished
24" x 24" Rectified	23.402" x 23.402"	7.94 mm	Matte
12" x 24" Rectified	11.625" x 23.375"	7.94 mm	Light Polished
12" x 24" Rectified	11.625" x 23.375"	7.94 mm	Matte

<sup>\*</sup>Not all sizes/trims are available in all colors and finishes

# Mosaics & Coordinating Trims\*

SIZE	ACTUAL	FINISH
3" x 24" Bullnose Rectified	2.78" x 23.402"	Matte
6" x 1" Cove Base	6" x 11.748"	Matte
6" x 1" Cove Base Outcorner	1" x 6"	Matte

#### **Product Characteristics**

TEST	LT POLISHED	MATTE
Breaking Strength	>275 lbs	>275 lbs
Chemical Resistance	Resistant	Resistant
DCOF	Not Applicable	≥0.42
Deep Scratch Resistance - Unglazed	Not Applicable	Not Applicable
Frost Resistance	Not Applicable	Not Applicable
Mohs Hardness - EN101	8	8
Water Absorption	<0.5	<0.5
Certifications	Not Applicable	Not Applicable
Country of Origin	USA and Mexico	USA and Mexico
Shade Variation Code	v2	v2



V2 Slight Variation



Recommend an offset pattern ≤33%



Made in Mexico



DCOF ≥0.42 (Matte only)



Made in USA



Water Absorption: <0.5%

# Application\*\*

		WALL	FLOOR
Interior	Residential	•	•
Interior	Commercial	•	•
Interior	Heavy Commercial		
Exterior	Residential/Commercial		

 $<sup>\</sup>ensuremath{^{**}}$  These recommendations are not defined by ANSI Standards

#### Material

Color-Body Porcelain



Ready Ship



# Request samples.

www.vitlsurfaces.com samples@vitlsurfaces.com









