TR-MRP04-B / TR-MRP042T-B

Network Video Recorder with Turing Vision Bridge



Key Features

- ✓ Turing cloud-ready with Smart NVR series and Turing bridge
- ✓ Support Ultra265/H.265/H.264 video formats
- ✓ 4-channel Plug and Play POE input
- ✓ Support HDMI and VGA simultaneous output
- ✓ Up to 8MP input resolution
- ✓ 1 SATA HDD, up to 6 TB

NDAA COMPLIANT

ONVIF®

SPECIFICATIONS

Network	
Incoming Bandwidth	80Mbps
Outgoing Bandwidth	64Mbps
Remote Users	128
Protocols	P2P, UPnP, NTP, DHCP, PPPoE

VIDEO/AUDIO	
IP Video Input	4-ch
Two-way Audio Input	1-ch, RCA
HDMI/VGA Output	HDMI: 1920x1080p/60Hz, 1920x1080p/50Hz, 1600x1200/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz VGA: 1920x1080p/60Hz, 1920x1080p/50Hz, 1600x1200/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz
Recording Resolution	4K/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF
Audio Output	1-ch, RCA
Synchronous Playback	8-ch
Corridor Mode Screen	3/4/5/7/9

Decoding	
Decoding Format	Ultra 265, H.265, H.264
Live View Playback	4K/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF
Capability	2 x 4k@30, 3 x 5MP@30, 4 x 4MP@30

Hard Disk	
SATA	1 SATA interface
Capacity	6 TB
Bundled HDD	TR-MRP04-B: None TR-MRP042T-B: 2TB


External Interface	
NETWORK INTERFACE	1 RJ45 10M/100M self-adaptive Ethernet Interface
USB Interface	Rear panel: 1 x USB2.0, 1 x USB3.0

PoE	
Interface	4 RJ-45 10M/100M self-adaptive Ethernet Interface
Max Power	Max 30W for single port Max 54W total
Supported Standard	IEEE 802.3af/at

GENERAL	
Power Supply	48V DC Power Consumption:≤9 W (without HDD)
Working Environment	-10°C~+ 55°C (+14°F~+131°F), Humidity ≤ 90% RH (non-condensing)
DIMENSIONS	260mm × 240mm × 47mm (10.2"×9.4"×1.9")
NET WEIGHT	1kg (2.20 lb)

COMPATIBILITY	
ONVIF	Profiles S/G/T
Recommended Turing Cameras	SMART Series Only

DIMENSIONS

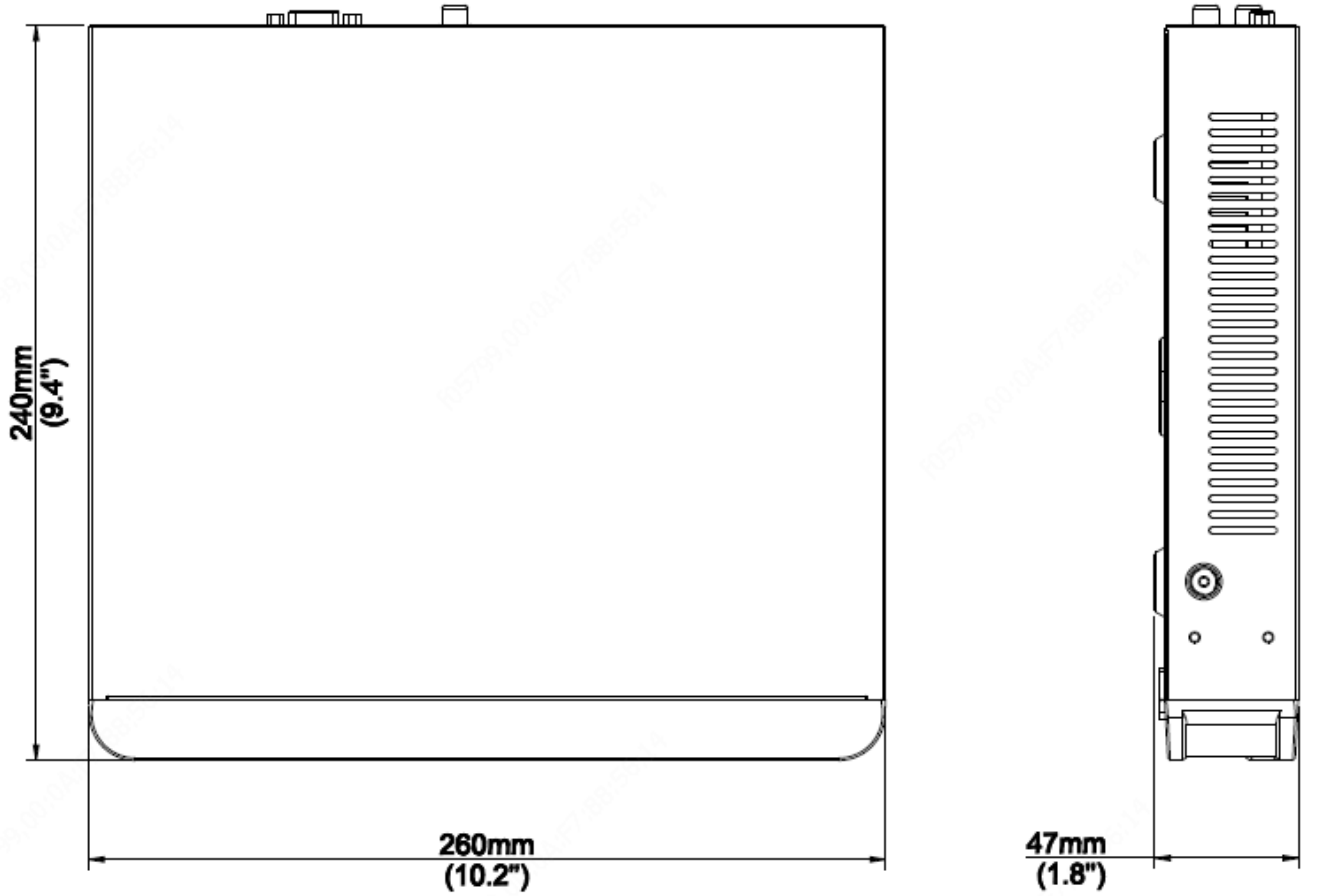

REAR PANEL

