79101 INSTALLATION INSTRUCTIONS

Please read carefully and save these instructions as you may need them a later date.

CAUTION

WARNING: Risk of Fire. Consult a qualified electrician to ensure correct branch circuit conductor.

Turn off the main power at the circuit breaker before installing the fixture in order to prevent possible shock.


GENERAL

All electrical connections must be in accordance with local and National Electrical Code (N.E.C.) standards. If you are unfamiliar with proper electrical wiring connections obtain the services of a qualified electrician.

Remove the fixture and the mounting package from the box and make sure that no parts are missing by referencing the illustration.

ASSEMBLY AND INSTALLATION

- 1. Secure mounting mounting bracket (6) to the outlet box (1) using box screws (7).
- 2. Pull out the outlet wire and ground wire (4) from the outlet box (1). Make wire connections with wire nut (8).
- --Ribbed wire (w/o marking) or white wire from light to White wire (2) from power source.
- --Smooth wire (w marking) or black wire from light to Black wire (3) from power source.
- --Attach the ground wire (4) to mounting bracket (6) with a ground screw (5).
- 3. Place the fixture's backplate over the mounting bracket (6) and secure mounting bracket screws (9).
- 4. Screw the bottom glass (10)onto the lamp body and make sure firmly installed.
- 5. Screw the top glass (11) onto the lamp body and make sure firmly installed.
- 6. Select color temperature through CCT switch (13). There are three optional color temperatures 3000K, 4000K and 5000K.
- 7. Turn on power.

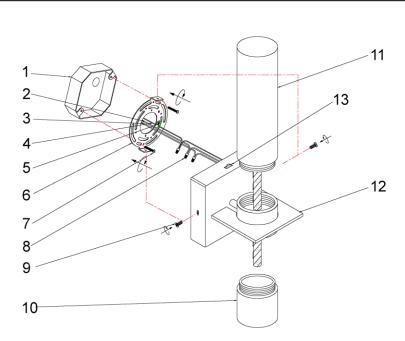

- 1. OUTLET BOX
- 2. WHITE WIRE
- 3. BLACK WIRE
- 4. GROUND WIRE
- 5. MOUNTING BRACKET
- 7. BOX SCREW
- 8. WIRE NUT
- 9. MOUNTING BRACKET SCREW
- 10. BOTTOM GLASS
- 11. TOP GLASS
- 12. LAMP BODY
- 13. CCT SWITCH