

GE Appliances

DDC4400SWH – GE 5.4 Cu. Ft. Large Capacity Modular Commercial Electric Dryer

Dryer Dimensions (in inches)

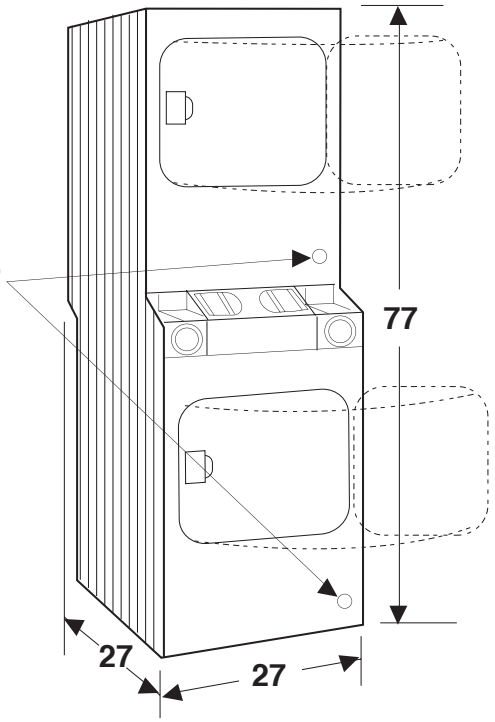

Front View

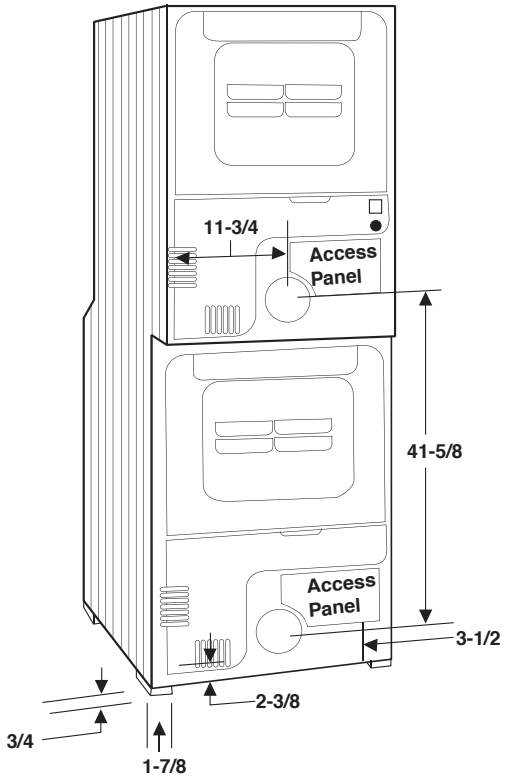

Rear View

Exhaust Options: Shipped with exhaust to the rear.
Electric model offers 3-way venting: left, right, or rear. Maximum recommended exhaust duct length is 25 feet of 4" rigid ducting with two 90° elbows and 4" dampered wall cap.

Requirements:

Electric – 120/240 Volts, 60 Hertz, 120/208* Volts, 60 Hertz, 5600 Watts at 240 Volts, 4400 Watts at 208 Volts. An individual branch circuit fused for 30-amps is required for each dryer.
*A special 208 Volt heater, part number WE11X0101 is available to reduce drying time in 208 Volt installations.

Note: Dimensions and specifications shown here are correct at the time this sheet was printed. Before proceeding with construction or rough-in, check installation instructions that came with your unit. Specifications, dimensions and design are subject to change without notice.

Note: Wall anchor chain provided for gas models only.

Listed by Underwriters Laboratories


For answers to your Monogram,® GE Profile™ or GE® appliance questions, visit our website at GEAppliances.com or call GE Answer Center® service, 800.626.2000.

Specification Revised 8/04
370338

GE Appliances

DDC4400SWH – GE 5.4 Cu. Ft. Large Capacity Modular Commercial Electric Dryer

Dryer Exhausting Information – Use Metal Duct Only



Domestic Dryer Models	Number of 90° Turns	Best Performance: Maximum Length of 4" Dia. **Rigid Metal** Duct — Exhaust Hood Type: Cat. No. WX8X59 (Preferred) **A** 4" Opening	Best Performance: Maximum Length of 4" Dia. **Rigid Metal** Duct — Exhaust Hood Type: **B** 2-1/2" Opening	Maximum Length of 4" Dia. **Flexible Metal** Duct — Exhaust Hood Type: Cat. No. WX8X58 (Preferred) **A** 4" Opening	Maximum Length of 4" Dia. **Flexible Metal** Duct — Exhaust Hood Type: **B** 2-1/2" Opening
Spacemaker® Models DSKS433EW WSM2780T	0	46 ft.	37 ft.	30 ft.	24 ft.
	1	38 ft.	30 ft.	25 ft.	20 ft.
	2	31 ft.	22 ft.	20 ft.	14 ft.
	3	24 ft.	15 ft.	16 ft.	10 ft.
Spacemaker® Model DSKP233EW	0	43 ft.	36 ft.	30 ft.	24 ft.
	1	33 ft.	26 ft.	24 ft.	18 ft.
	3	23 ft.	16 ft.	16 ft.	10 ft.
Spacemaker® Model WSM2700T	0	56 ft.	42 ft.	30 ft.	22 ft.
	1	46 ft.	36 ft.	22 ft.	14 ft.
	2	34 ft.	28 ft.	16 ft.	10 ft.
	3	32 ft.	18 ft.	10 ft.	5 ft.
Spacemaker® Models WSM2420T WSM2480T	0	43 ft.	36 ft.	30 ft.	24 ft.
	1	33 ft.	26 ft.	24 ft.	18 ft.
	2	23 ft.	16 ft.	16 ft.	10 ft.

Special Installation Requirements

Alcove or Closet Installation:

- If your dryer is approved for installation in an alcove or closet, it will be stated on a label on the dryer back.
- The dryer MUST be exhausted to the outside.
- Minimum clearances between dryer cabinet and adjacent walls or other surfaces are:
  0" either side
  3" front and rear
- Minimum vertical space from floor to overhead cabinets, ceilings, etc. is 52."
- Closet doors must be louvered or otherwise ventilated and must contain a minimum of 60 sq. in. of open area equally distributed.
  If this closet contains both a washer and a dryer, doors must contain a minimum of 120 sq. in. of open area equally distributed.
- The closet should be vented to the outdoors to prevent gas pocketing in case of a gas leak in the supply line.
- No other fuel-burning appliance shall be installed in the same closet with the dryer.

Bathroom or Bedroom Installation:

- The dryer MUST be exhausted to the outdoors.
- The installation must conform with the local codes, or in the absence of local codes, with the National Fuel Gas Code, ANSI Z223.

Minimum Clearances other than Alcove or Closet Installation:

- Minimum clearances to combustible surfaces
  0" both sides
  3" rear

Specification Revised 8/04

370338

For complete information, see installation instructions packed with your dryer.

Important Note:
GE Kit Number WE14X70 needed when converting rear exhaust to bottom or side. (On large capacity models.)

Ducting Materials:
For best performance, this dryer should be vented with 4" diameter all rigid metal exhaust duct. If "all rigid metal" duct cannot be used, then "flexible all metal" venting can be used, but it will reduce the maximum recommended duct length.

Exhaust Length Calculation

1. Determine the number of 90° turns needed for your installation. If you exhaust to the side or bottom of dryer, add one turn.
2. The maximum length of 4' rigid (aluminum or galvanized) duct which can be tolerated is shown in the table. The maximum length for flexible ducts are less than for rigid duct.

A turn of 45° or less may be ignored. Two 45° turns within the duct length should be treated as a 90° elbow. A turn over 45° should be treated as a 90° elbow.

Exhausting the dryer to the outside is strongly recommended to prevent large amounts of moisture and lint from being blown into the room. Gas dryers or any dryer located in a closet **must** be exhausted to the outside.

Caution: For personal safety do not terminate exhaust into a chimney, under any enclosed house floor (crawl space), or into an attic, since the accumulated lint could create a fire hazard or moisture could cause damage. Never terminate the exhaust into a common duct or plenum with a kitchen exhaust, since the combination of lint and grease could create a fire hazard.

Exhaust ducts should be terminated in a dampered wall cap to prevent back drafts, bird nesting, etc. The wall cap must also be located at least 12" above the ground or any other obstruction with the opening pointed Down.


Other terminations, such as louvered wall boxes, are acceptable provided they are equivalent to a 4" opening dampered wall cap.

Listed by Underwriters Laboratories

For answers to your Monogram,® GE Profile™ or GE® appliance questions, visit our website at GEAppliances.com or call GE Answer Center® service, 800.626.2000.

GE Appliances

DDC4400SWH – GE 5.4 Cu. Ft. Large Capacity Modular Commercial Electric Dryer

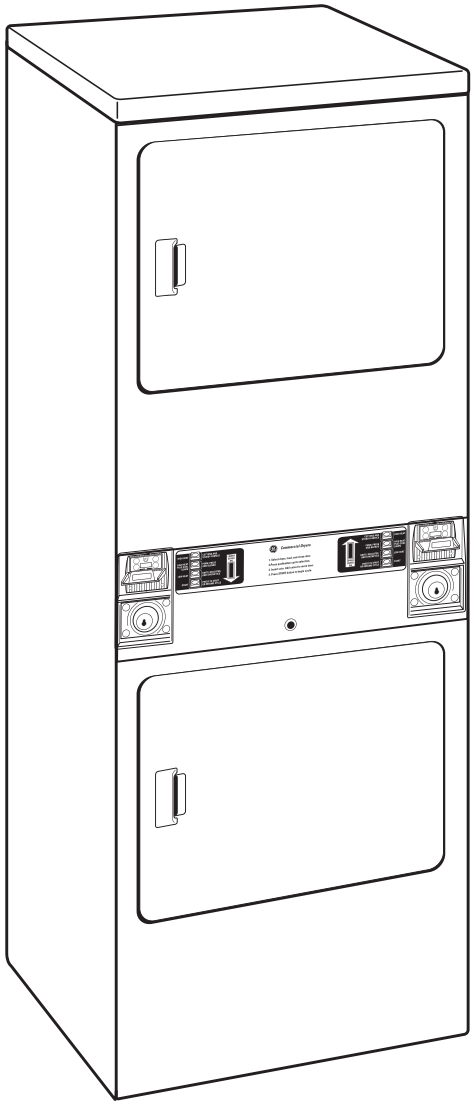

Features and Benefits

- Large Capacity (5.4 Cu. Ft.)
- Commercial Modular Two-Unit Dryer System
- Automatic Dry Control
- Up-Front Lint Filter
- 3 Cycles: Cottons, Permanent Press, Delicates/Synthetic/Knits
- 3 Heat Selections
- Porcelain Drum Interior
- Front Serviceable
- Extra-Large Door Opening
- Reversible Door
- Model DDC4400SWH – White (Electric)
- Model DDC4400SAD – Almond (Electric)
- Model DDC4500SWH – White (Gas)
- Model DDC4500SAD – Almond (Gas)

Specification Revised 8/04
370338